

Service  
Service  
Service



Model: 150C5BS/00

# Service Manual

Horizontal Frequencies  
30 - 61KHz

## TABLE OF CONTENTS

Description	Page	Description	Page
Important Safety Notice -----	2	Function Block Diagram-----	22
Technical Data -----	3~4	Scaler Schematic Diagram-----	23~26
Philips Pixel Defect Policy-----	5	Scaler Board C.B.A.-----	27~28
Troubleshooting-----	6	Control Schematic Diagram & C.B.A.-----	29
Installation -----	7~9	Power Schematic Diagram-----	30~31
On Screen Display-----	10	Exploded View-----	32
Electrical Instructions-----	11	Spare Parts List-----	33~ 34
Safety Test Requirement-----	12	Recommended Parts List -----	35
Mechanical Instructions-----	13~ 14	Failure Mode Of Panel-----	36
Factory Mode & Aging Mode-----	15	General Product Specification-----	37~58
Warning Message-----	16	DDC Instructions-----	59~63
Repair Tips-----	17	DDC Data-----	64
Repair Flow Chart-----	18~20	Firmware Update For CPU -----	65~67
Wiring Diagram-----	21		

### SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

REFER TO BACK COVER FOR IMPORTANT SAFETY GUIDELINES



## Important Safety Notice

◀◀ Go to cover page

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company\*\* Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

\* \* Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

### WARNING

Critical components having special safety characteristics are identified with a ▲ by the Ref. No. in the parts list and enclosed within a broken line\* (where several critical components are grouped in one area) along with the safety symbol ▲ on the schematics or exploded views.

Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

\* Broken Line



FOR PRODUCTS CONTAINING LASER :

- DANGER-** Invisible laser radiation when open.  
AVOID DIRECT EXPOSURE TO BEAM.
- CAUTION-** Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- CAUTION-** The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body are grounded through wrist band.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel become dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

**Product Features**

**Outstanding front of screen performance**

Fast response time capable of handling fast moving pictures  
sRGB ensures color matching between display and printouts  
XGA 1024 x 768 resolution for sharper display

**Design that complements any interior**

Elegant, sleek design complements your home decor  
Compact and slim design saves space and fits anywhere

**Best value for money**

TCO guarantees the highest safety and ergonomics standards  
The lower power consumption than industry average

**Great convenience**

Embedded power supply eliminates external power adaptors  
Auto adjustment for perfect picture display with one touch  
Easily adjust display settings with Philips SmartControl  
Cable clip manages cables for a tidy work space  
Detachable base for easy moving and storage  
Screen tilts for comfortable viewing from any angle

**Technical Specifications\***

**LCD PANEL**

Type	TFT LCD
Screen size	15" visual (38cm)
Pixel Pitch	0.297 x 0.297 mm
LCD Panel type	1024 x 768 pixels R.G.B. vertical stripe Anti-glare polarizer, hard coated
Effective viewing area	304.1 x 228.1 mm
Display Colors	16M colors

**SCANNING**

Vertical refresh rate	56 Hz-76 Hz
Horizontal Frequency	30 kHz-61 kHz

**VIDEO**

Video dot rate	80 Mhz
Input impedance	75 ohm
- Video	2K ohm
- Sync	
Input signal levels	700m Vpp
Sync input signal	Separate sync Composite sync Sync on green
Sync polarities	Positive and negative
Input Frequency	XGA Hsync 48- 61 kHz, Vsync 60 - 76 Hz (N.I.)
	SVGA Hsync 35- 50 kHz, Vsync 56 - 75 Hz (N.I.)
	VGA Hsync 31- 38 kHz, Vsync 60 - 76 Hz (N.I.)
Video interface	Analog (D-Sub)

**Optical characteristics**

contrast ratio	400:1 (typ.)
Brightness	250 cd/m <sup>2</sup> (typ.)

Peak contrast angle	6 o'clock
White Chromaticity	x: 0.283 y: 0.297 (at 9300° K) x: 0.313 y: 0.329 (at 6500° K) x: 0.313 y: 0.329 (at sRGB)
Viewing Angle (C/R>=10)	Upper 45° (typ.) Lower 55° (typ.) Left 65° (typ.) Right 65° (typ.)
Response time	16 ms (typ.)

**sRGB**

sRGB is a standard for ensuring correct exchange of colors between different devices (e.g. digital cameras, monitors, printers, scanners, etc.)

Using a standard unified color space, sRGB will help represent pictures taken by an sRGBcompatible device correctly on your sRGB enabled Philips monitors. In that way, the colors are calibrated and you can rely on the correctness of the colors shown on your screen.

Important with the use of sRGB is that the brightness and contrast of your monitor is fixed to a predefined setting as well as the color gamut. Therefore it is important to select the sRGB setting in the monitor's OSD.

To do so, open the OSD by pressing the OK button on the front of your monitor. Use the down button to go to Adjust Color and press OK again. Then move the down button to go to sRGB and press OK again.

After this, please do not change the brightness or contrast setting of your monitor. If you change either of these, the monitor will exit the sRGB mode and go to a color temperature setting of 6500K.

For more information on sRGB, please visit: [www.srgb.com](http://www.srgb.com)

**Resolution & Preset Modes**

Maximum	1024 X 768 at 75Hz
Recommended	1024 X 768 at 60 Hz

**15 user definable modes**

**14 factory preset modes:**

H. Freq (kHz)	Resolution	V. freq (Hz)
31.469	640*350	70.086
31.469	720*400	70.087
31.469	640*480	59.940
35.000	640*480	67.000
37.861	640*480	72.809
37.500	640*480	75.000
35.156	800*600	56.250
37.879	800*600	60.317
48.077	800*600	72.188
46.875	800*600	75.000
49.700	832*624	75.000
48.363	1024*768	60.004
56.476	1024*768	70.069
60.023	1024*768	75.029

Go to cover page

### Automatic Power Saving

If you have VESA DPMS compliance display card or software installed in your PC, the monitor can automatically reduce its power consumption when not in use. If an input from a keyboard, mouse or other input device is detected, the monitor will 'wake up' automatically. The following table shows the power consumption and signaling of this automatic power saving feature:

#### Power Management Definition

VESA Mode	Video	H-sync	V-sync	Power Used	LED color
ON	Active	Yes	Yes	< 20 W	Green
OFF	Blanked	No	No	< 1 W	Amber

This monitor is ENERGY STAR<sup>®</sup> compliant. As an ENERGY STAR<sup>®</sup> Partner, PHILIPS has determined that this product meets the ENERGY STAR<sup>®</sup> guidelines for energy efficiency.

### Physical Specification


Dimension (W X H X D) *	360 x 349 x173.5 mm (incl. Pedestal)
Weight	2.97 Kg
Tilt	-5° --25°
Power Supply	100 ---240VAC, 50/60 Hz
Power consumption	18 W* (typ.)
Temperature	5° C to 40° C (operating) -20° C to 60° C (storage)
Relative humidity	20% to 80%
System MTBF	50K hours (excluding CCFL 40K hours)

\*This data is subject to change without notice.

\*Resolution 1024 X 768, standard size, brightness max., Contrast 50%, full white pattern.

### Pin Assignment

The 15-pin D-sub connector(male) of the signal cable(IBM systmes):

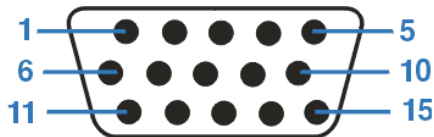

Pin No.	Assignment	Pin No.	Assignment
1	Red video input	9	+5V
2	Green video input/SOG	10	Logic ground
3	Blue video input	11	Ground
4	Sense (GND)	12	Serial data line (SDA)
5	Hot Plug Detect	13	H. Sync / H+V
6	Red video ground	14	V. Sync (VCLK for DDC)
7	Green video ground	15	Data clock line (SCL)
8	Blue video ground		

### Physical Function

Tilt



### Energy Star Declaration

This monitor is equipped with a function for saving energy which supports the VESA Display Power Management Signaling (DPMS) standard. This means that the monitor must be connected to a computer which supports VESA DPMS to fulfill the requirements in the NUTEK specification 803299/94. Time settings are adjusted from the system unit by software


	NUTEK	VESA State	LED Indicator	Power Consumption
Normal operation	ON		Green	< 20 W
Power Saving Alternative 2 One step	OFF		Amber	< 1 W



As an ENERGY STAR<sup>®</sup> Partner, PHILIPS has determined that this product meets the ENERGY STAR<sup>®</sup> guidelines for energy efficiency.

**Philips' Flat Panel Monitors Pixel Defect Policy**

Philips strives to deliver the highest quality products. We use some of the industry's most advanced manufacturing processes and practice stringent quality control. However, pixel or sub pixel defects on the TFT LCD panels used in flat panel monitors are sometimes unavoidable. No manufacturer can guarantee that all panels will be free from pixel defects, but Philips guarantees that any monitor with an unacceptable number of defects will be repaired or replaced under warranty. This notice explains the different types of pixel defects and defines acceptable defect levels for each type. In order to qualify for repair or replacement under warranty, the number of pixel defects on a TFT LCD panel must exceed these acceptable levels. For example, no more than 0.0004% of the sub pixels on a 15" XGA monitor may be defective. Furthermore, Philips sets even higher quality standards for certain types or combinations of pixel defects that are more noticeable than others. This policy is valid worldwide.

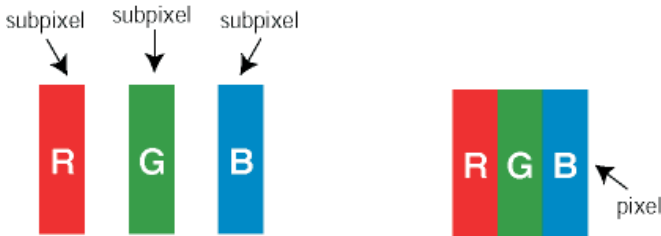

**Pixels and Sub pixels**

A pixel, or picture element, is composed of three sub pixels in the primary colors of red, green and blue. Many pixels together form an image. When all sub pixels of a pixel are lit, the three colored sub pixels together appear as a single white pixel. When all are dark, the three colored sub pixels together appear as a single black pixel. Other combinations of lit and dark sub pixels appear as single pixels of other colors.

**Types of Pixel Defects**

Pixel and sub pixel defects appear on the screen in different ways. There are two categories of pixel defects and several types of sub pixel defects within each category. Bright dot defects appear as pixels or sub pixels that are always lit or 'on'. These are the types of bright dot defects:




One lit red, green or blue sub pixel

Two adjacent lit sub pixels:  
- Red + Blue = Purple  
- Red + Green = Yellow  
- Green + Blue = Cyan (Light Blue)

Three adjacent lit sub pixels (one white pixel)

**Black Dot Defects** Black dot defects appear as pixels or sub pixels that are always dark or 'off'. These are the types of black dot defects:

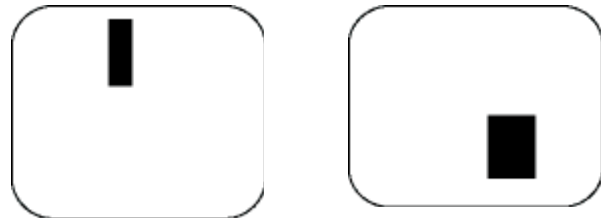

One dark sub pixel

Two or three adjacent dark sub pixels

**Proximity of Pixel Defects**

Because pixel and sub pixels defects of the same type that are near to one another may be more noticeable, Philips also specifies tolerances for the proximity of pixel defects.

**Pixel Defect Tolerances**

In order to qualify for repair or replacement due to pixel defects during the warranty period, a TFT LCD panel in a Philips flat panel monitor must have pixel or sub pixel defects exceeding the tolerances listed in the following tables.

BRIGHT DOT DEFECTS	ACCEPTABLE LEVEL
MODEL	150C5
1 lit subpixel	4 or fewer
2 adjacent lit subpixels	2 or fewer
3 adjacent lit subpixels (one white pixel)	0
Distance between two bright dot defects*	15 mm or more
Total bright dot defects of all types	4 or fewer

BLACK DOT DEFECTS	ACCEPTABLE LEVEL
MODEL	150C5
1 dark subpixel	4 or fewer
2 adjacent dark subpixels	2 or fewer
3 adjacent dark subpixels	1 or fewer
Distance between two black dot defects*	15 mm or more
Total black dot defects of all types	4 or fewer

TOTAL DOT DEFECTS	ACCEPTABLE LEVEL
MODEL	150C5
Total bright or black dot defects of all types	5 or fewer

Note:

\* 1 or 2 adjacent sub pixel defects = 1 dot defect

All Philips monitors are ISO13406-2 Compliant

This page deals with problems that can be corrected by the user.




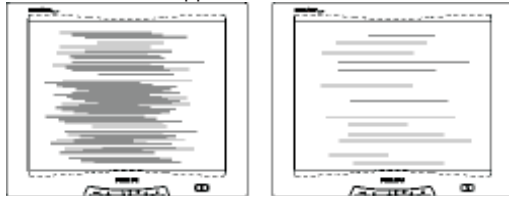
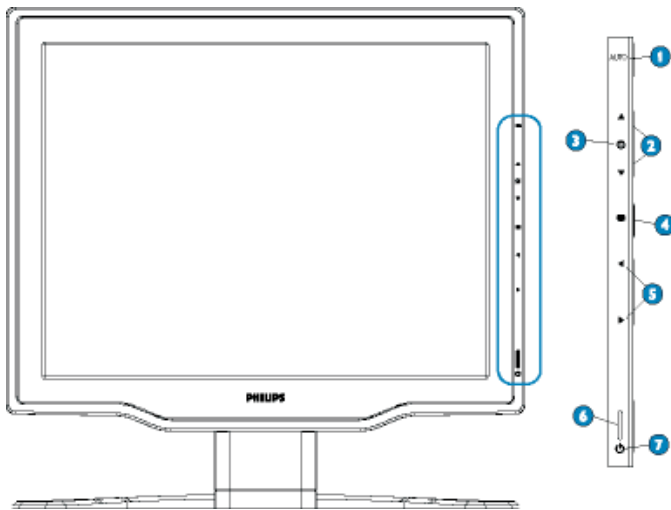






Common Problems	
Having this problem?	Check these items
No Picture (power LED not lit)	<ul style="list-style-type: none"> <li>• Make sure the power cord is plugged into the power outlet and into the back of the monitor.</li> <li>• First, ensure that the power button on the front of the monitor is in the OFF position, then press it to the ON position</li> </ul>
No Picture (Power LED is amber or yellow)	<ul style="list-style-type: none"> <li>• Make sure the computer is turned on.</li> <li>• Make sure the signal cable is properly connected to your computer.</li> <li>• Check to see if the monitor cable has bent pins.</li> <li>• The Energy Saving feature may be activated</li> </ul>
Screen says 	<ul style="list-style-type: none"> <li>• Make sure the monitor cable properly connected to your computer. (Also refer to the Quick Set-Up Guide).</li> <li>• Check to see if the monitor cable has bent pins,</li> <li>• Make sure the computer is turned on.</li> </ul>
Screen says 	<ul style="list-style-type: none"> <li>• Make sure the vertical sync of input signal is within the range of 56--75Hz.</li> <li>• Change the refresh rate to 56--75Hz within 10 minutes.</li> <li>• Re-power on monitor to start over again if you failed to change the refresh rate within 10 minutes.</li> </ul>
AUTO button not working properly	<ul style="list-style-type: none"> <li>• The Auto Function is designed for use on standard Macintosh or IBM-compatible PCs running Microsoft Windows.</li> <li>• It may not work properly if using nonstandard PC or video card.</li> </ul>

Image Problems	
Having this problem?	Check these items
Display position is incorrect	<ul style="list-style-type: none"> <li>• Press the AUTO button</li> <li>• Adjust the image position using the Horizontal Position and/or Vertical Position in OSD Main Controls.</li> </ul>
Image vibrates on the screen	<ul style="list-style-type: none"> <li>• Check that the signal cable is properly connected to the graphics board or PC.</li> </ul>
Vertical flicker appears 	<ul style="list-style-type: none"> <li>• Press the AUTO button</li> <li>• Eliminate the vertical bars using the Clock Adjustment of VIDEO NOISE in OSD Main Controls.</li> </ul>
Horizontal flicker appears 	<ul style="list-style-type: none"> <li>• Press the AUTO button</li> <li>• Eliminate the horizontal bars using the Phase Adjustment of VIDEO NOISE in OSD Main Controls.</li> </ul>
The screen is too bright or too dark	<ul style="list-style-type: none"> <li>• Adjust the contrast and brightness on OSD Main Controls. (The backlight of the LCD monitor has a fixed life span. When the screen becomes dark or begins to flicker, please contact your dealer).</li> </ul>
An after-image appears	<ul style="list-style-type: none"> <li>• If an image remains on the screen for an extended period of time, it may be imprinted in the screen and leave an after-image. This usually disappears after a few hours.</li> </ul>
An after-image remains after the power has been turned off.	<ul style="list-style-type: none"> <li>• This is characteristic of liquid crystal and is not caused by a malfunction or deterioration of the liquid crystal. The after-image will disappear after a period of time.</li> </ul>
Green, red, blue, and white dots remains	<ul style="list-style-type: none"> <li>• The remaining dots are normal characteristic of the liquid crystal used in today's technology.</li> </ul>




### Front view product description



- 1 **AUTO** Automatically adjust the horizontal position, vertical position, phase and clock setting.
- 2  UP and DOWN buttons are used when adjusting the OSD of your monitor.
- 3  BRIGHTNESS hotkey. When the UP and DOWN arrow buttons are pressed, the adjustment controls for the BRIGHTNESS will show up.
- 4  OK button which when pressed will take you to the OSD controls.
- 5  LEFT and RIGHT buttons, like the UP and DOWN buttons, are also used in adjusting the OSD of your monitor.
- 6  Power LED
- 7  POWER button switches your monitor on.

### Back view product description

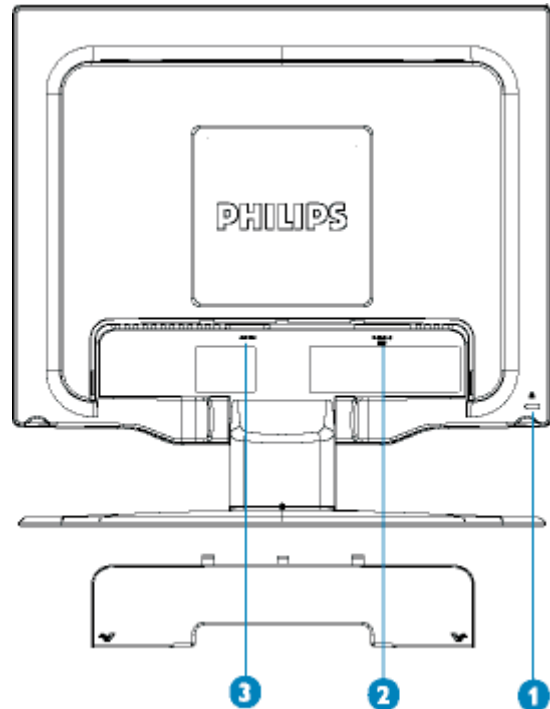

- 1 Kensington anti-thief lock
- 2 VGA input
- 3 AC power input

### Optimizing Performance

For best performance, ensure that your display settings are set at 1024x768, 60Hz.




**Note:** You can check the current display settings by pressing the 'OK' button once. Go into the Product Information. The current display mode is shown on the item called RESOLUTION.


You can also install the [Flat Panel Adjust \(FP Adjust\) program](#), a program for getting the best performance out of your monitor. This is included on this CD. Step-by-step instructions are provided to guide you through the installation process. Click on the link to know more about this program.

### Connecting to Your PC


1)

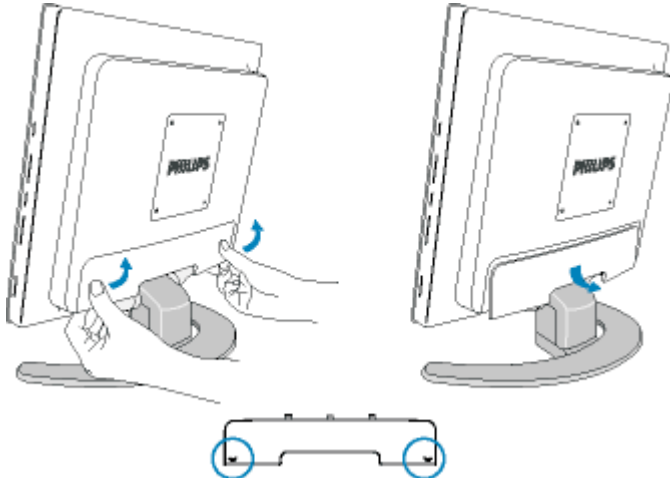


3)

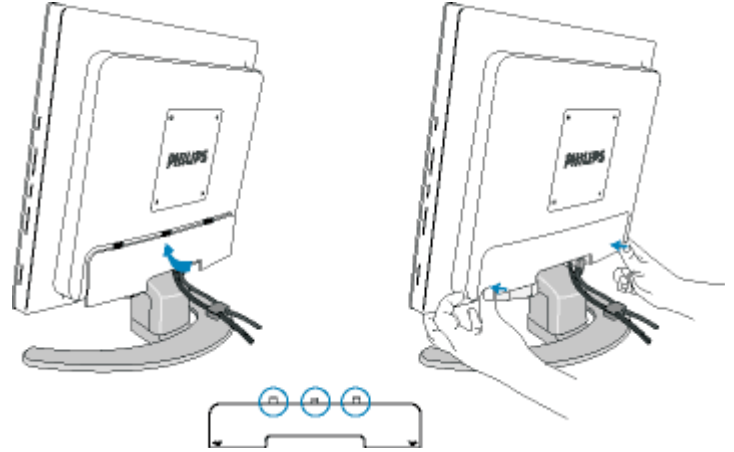

2)

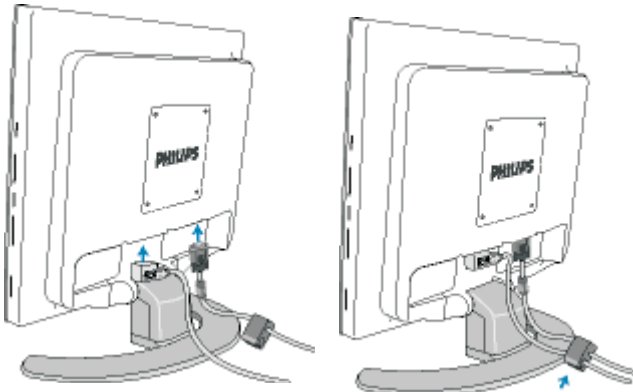

4)

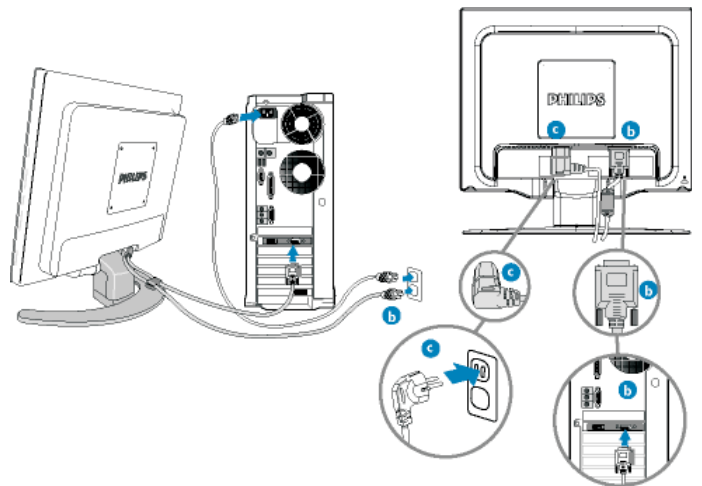

#### 4) Connect to PC


- (a) Turn off your computer and unplug its power cable.
- (b) Connect the monitor signal cable to the video connector on the back of your computer.
- (c) Plug the power cord of your computer and your monitor into a nearby outlet.
- (d) Turn on your computer and monitor. If the monitor displays an image, installation is complete.

**Note:** If you use an Apple Macintosh, you need to connect the special Mac adapter to one end of the monitor signal cable.




### Attaching & Detaching and Removing the base

To attach the base:

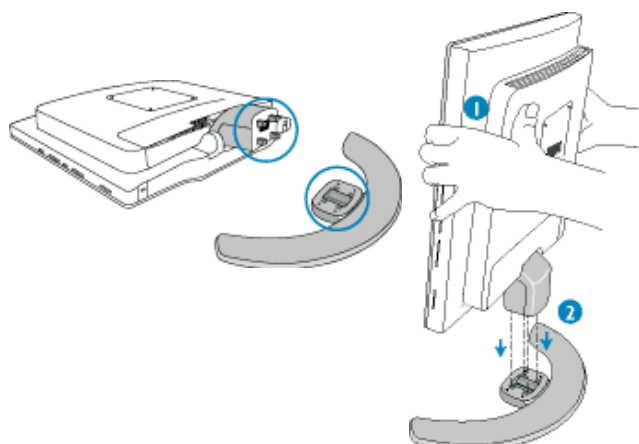


- 1) Hold the monitor body with both hands.
- 2) Align four-pronged base attachment unit on the bottom of the screen with the four socket holes on the base.

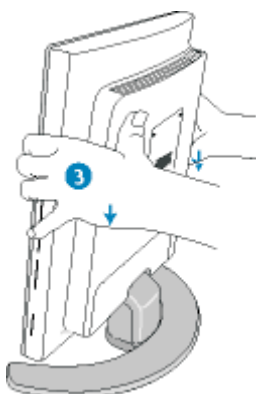


- 3) Firmly fix screen into the base plate.

To detach the base:

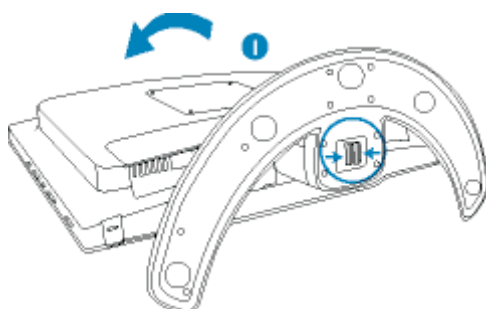


- 1) Place the monitor face down a smooth surface taking care to avoid scratching or damaging the screen.

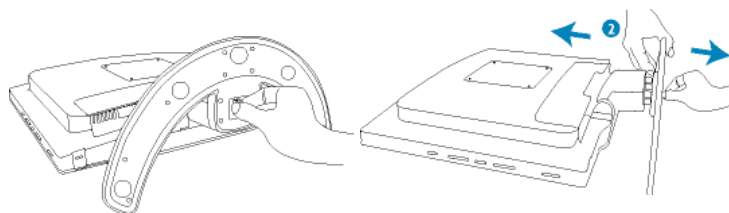


- 2) Press the release latches on the bottom of the base together and gently remove the attachment unit from the base.


 To remove the base for VESA standard mounting applications

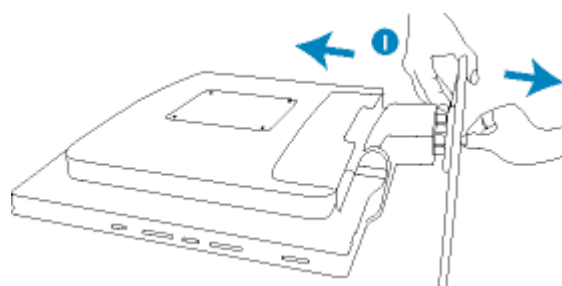

- 1) Detach the screen from the base.

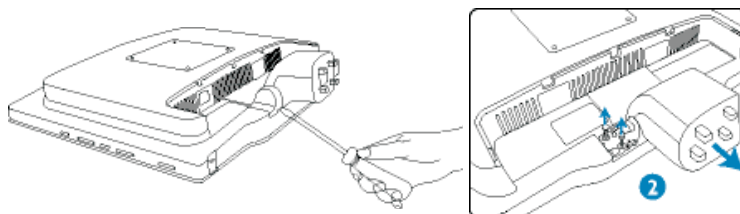

- 2) Remove the screws and then detach the base attachment unit from the LCD monitor.

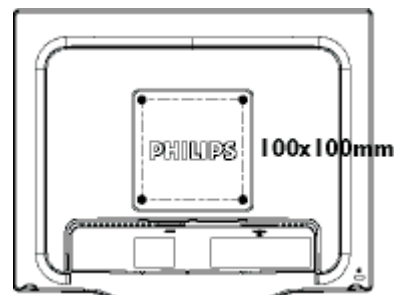

**Note:** This monitor is designed to work with a 100mm x 100mm VESA-compliant mounting interface.

◀◀ Go to cover page

## Description of the On Screen Display

### What is the On-Screen Display?

This is a feature in all Philips LCD monitors. It allows an end user to adjust screen performance of the monitors directly through an on-screen instruction window. The user interface provides user friendliness and ease-of-use when operating the monitor.


### Basic and simple instruction on the control keys.

When you press the **OK** button on the side control of your monitor, the On-Screen Display (OSD) Main Controls window will pop up and you can then start making adjustments to your monitor's various features. Use the ◀▶ or the ▲▼ keys to make your adjustments.



### The OSD Tree

Below is an overall view of the structure of the On-Screen Display. You can use this as a reference when you want to work your way around the different adjustments later on.

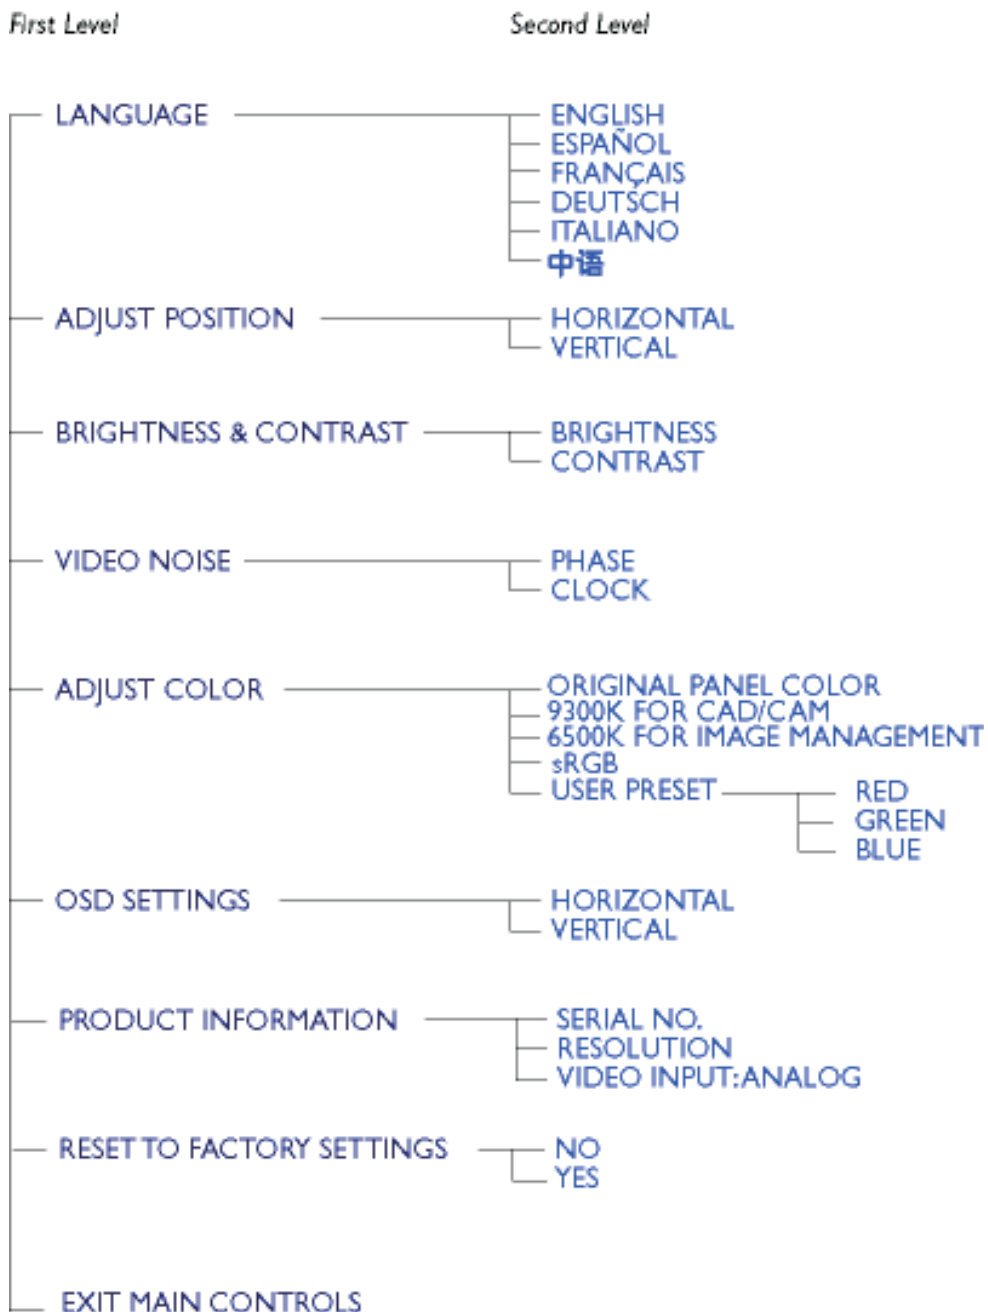

1. General points

- 1.1 During the test and measuring, supply a distortion free AC mains Voltage to the apparatus via an isolated transformer with low internal resistance.
- 1.2 All measurements mentioned hereafter are carried out at a Normal mains voltage (90 - 132 VAC for USA version, 195 -264 VAC for EUROPEAN version, or 90 - 264 VAC for the model with full range power supply, unless otherwise stated.)
- 1.3 All voltages are to be measured or applied with respect to ground, unless otherwise stated.  
Note: don't use heat-sink as ground.
- 1.4 The test has to be done on a complete set including LCD panel after 30 minutes warm-up at least in a room with temperature of 25 +/- 5 degree C.
- 1.5 All values mentioned in this test instruction are only applicable of a well aligned apparatus, with correct signal.
- 1.6 The letters symbols (B) and (S) placed behind the test instruction denotes (B): carried out 100% inspection at assembly line (S): carried out test by sampling
- 1.7 The white balance (color temperature), has to be tested in subdued lighted room.
- 1.8 Repetitive power on/off cycle are allowed except it should be avoided within 6 sec.

2. Input signal

- 2.1 Signal type  
Video: 0.7 Vp-p linear, positive polarity  
Sync. : TTL level, separate, positive or negative polarity  
Signal source: pattern generator format as attachment (table 1 to 14)  
Reference generator: Quantum 802BT or VTG 1250
- 2.2 Allowed signal mode specified

PRESET VIDEO RESOLUTION

Dot rate (MHz)	H.freq (KHz)	Mode	Resolution	V.freq (Hz)
25.175	31.469	VGA	640 * 350	70.087
28.322	31.469	VGA	720 * 400	70.087
25.175	31.469	VGA	640 * 480	59.940
30.240	35.000	MACINTOSH	640 * 480	66.667
31.500	37.861	VESA	640 * 480	72.809
31.500	37.500	VESA	640 * 480	75.000
36.000	35.156	VESA	800 * 600	56.250
40.000	37.879	VESA	800 * 600	60.317
50.000	48.077	VESA	800 * 600	72.188
49.500	46.875	VESA	800 * 600	75.000
57.300	49.700	MACINTOSH	832 * 624	75.000
65.000	48.363	VESA	1024 * 768	60.004
75.000	56.476	VESA	1024 * 768	70.069
78.750	60.023	VESA	1024 * 768	75.029

- 3. AC Adaptor
- 3.1 Setup the AC I/P at 90VAC, and Output DC loading at 12V 1.6 Amp, 3V3 1Amp, The DC output voltages are 3.3V +/- 0.16V DC, and 12VDC (+11V ~ 16 V)

4. Display Adjustment

- 4.1 Auto color adjustment (B)  
  
Apply a 640 \* 480 / 60Hz signal with 16 level grey test pattern, set brightness control at 100%, and contrast control at 50%.  
Adjust the R. G. B offset, and gain to calibrate the color smoothly and 64-grey level distinguishable.

4.2 Color temperature adjustment (B)

Apply a 1024 \* 768, 48.36kHz / 60Hz signal with white pattern. Set brightness control at 100%, and contrast control at 50%. Adjust the R.G. B gain in factory setting to reach special color temperature on center of screen.  
The 1931 CIE chromaticity (X, Y) co-ordinates shall be:

	9300°K	6500°K
x (center)	0.283 ± 0.005	0.313 ± 0.005
y (center)	0.297 ± 0.005	0.329 ± 0.005

Use Minolta CA-110 for color coordinates and luminance check. Luminance is > 200 nits in the center of the screen at original panel color.

4.3 Adjustment of sRGB

Apply a 1024\*768 / 60Hz signal with white pattern, set brightness control at 100%, and contrast control at 50%. Adjust the R, G, B Sub-Gain, for the screen center, the 1931 CIE chromaticity (X, Y) co-ordinates shall be:

	sRGB
x(center)	0.313 ± 0.005
y(center)	0.329 ± 0.005
Ynits	180 ± 10

4.4 EEPROM presetting (B)

After finishing all the adjustment, set:  
Brightness control to 100%  
Contrast control to 50%  
OSD position at middle of screen  
COLOR ADJUST to 6500°K

Go to cover page

All units that are returned for service or repair must pass the original manufactures safety tests. Safety testing requires both *HiPot* and *Ground Continuity* testing.

## HI-POT TEST INSTRUCTION

### 1. Application requirements

- 1.1 All mains operated products must pass the Hi-Pot test as described in this instruction.
- 1.2 This test must be performed again after the covers have been refitted following the repair, inspection or modification of the product.

### 2. Test method

#### 2.1 Connecting conditions

- 2.1.1 The test specified must be applied between the parallel-blade plug of the mains cord and all accessible metal parts of the product.
- 2.1.2 Before carrying out the test, reliable conductive connections must be ensured and thereafter be maintained throughout the test period.
- 2.1.3 The mains switch(es) must be in the "ON" position.

#### 2.2 Test Requirements

All products should be HiPot and Ground Continuity tested as follows:

Condition	HiPot Test for products where the mains input range is Full range(or 220V AC)	HiPot Test for products where the mains input is 110V AC(USA type)	Ground Continuity Test requirement
Test voltage	2820VDC (2000VAC)	1700VDC (1200VAC)	Test current: 25A,AC Test time: 3 seconds(min.) Resistance required: $\leq 0.09 + R_{ohm}$ , R is the resistance of the mains cord.
Test time (min.)	3 seconds	1 second	
Trip current (Tester)	set at 100 uA for Max. limitation; set at 0.1 uA for Min. Limitation	5 mA	
Ramp time (Tester)	set at 2 seconds		

- 2.2.1 The minimum test duration for Quality Control Inspector must be 1 minute.
- 2.2.2 The test voltage must be maintained within the specified voltage + 5%.
- 2.2.3 There must be no breakdown during the test.
- 2.2.4 The grounding blade or pin of mains plug must be conducted with accessible metal parts.

### 3. Equipments and Connection


#### 3.1. Equipments

For example :

- ChenHwa 9032 PROGRAMMABLE AUTO SAFETY TESTER
- ChenHwa 510B Digital Grounding Continuity Tester
- ChenHwa 901 (AC Hi-pot test), 902 (AC, DC Hi-pot test) Withstanding Tester

#### 3.2. Connection

- \* Turn on the power switch of monitor before Hipot and Ground Continuity testing.

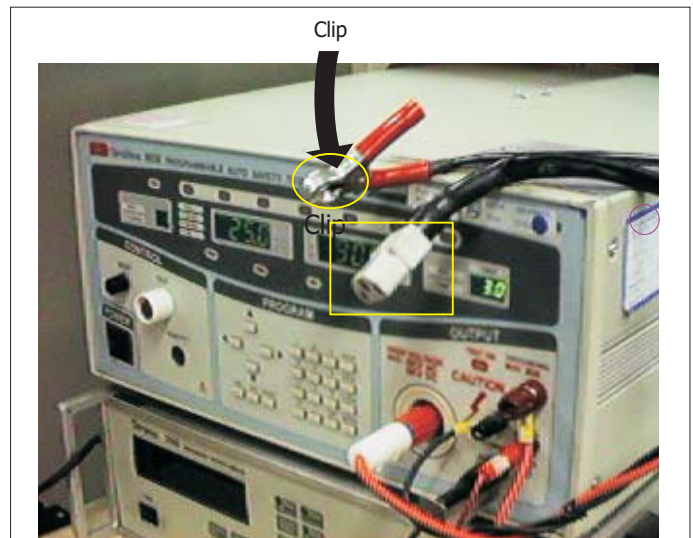

(ChenHwa 9032 tester)

Video cable



Connect the "video cable" or "grounding screw" to the CLIP on your tester.

Grounding screw



Connect the power cord to the monitor.

Power outlet

### 4. Recording

(Rear view of monitor)

Hipot and Ground Continuity testing records have to be kept for a period of 10 years.

### Front View



Fig. 1

### Back View



Fig. 2

#### Step 1:

- Unscrew the four screws as shown in Fig. 3.
- Remove the base.
- Unscrew the three screws as shown in Fig. 4.



Fig. 3



Fig. 4

#### Step 2: Remove the front bezel

- Use thin "I" type screwdriver to open 2 clicks on bottom side as shown in Fig. 5.
- Use thin "I" type screwdriver to open 3 clicks on right and left side as shown in Fig. 6.
- Use thin "I" type screwdriver to open 4 clicks on top side as shown in Fig. 7.



Fig. 5

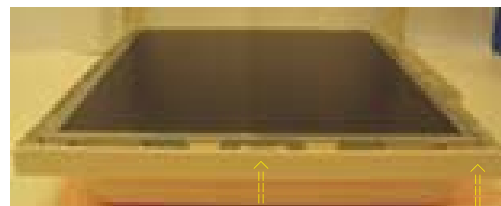


Fig. 6

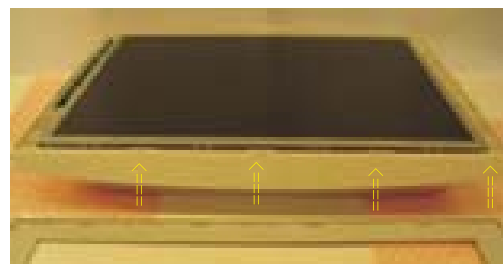


Fig. 7



Go to cover page


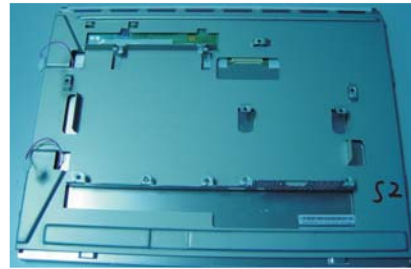


Fig. 8

Step 3: Remove the Back Cover shown as Fig. 9 & Fig. 10.



Fig. 9

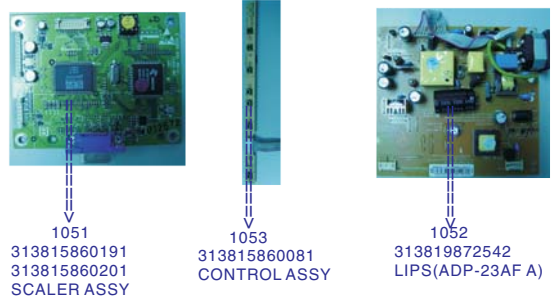

LCD Panel  
1050 823827714731 TFT-LCD MOD LM150X08-A4  
1050 932221135682 TFT-LCD CLAA150XP01 (CPT0) B

\*\*\*\*\*  
In warranty, it is not allowed to disassembly the LCD panel, even the backlight unit defect.  
Out of warranty, the replacment of backlight unit is a correct way when the defect is cused by backlight (CCFL,Lamp).  
\*\*\*\*\*

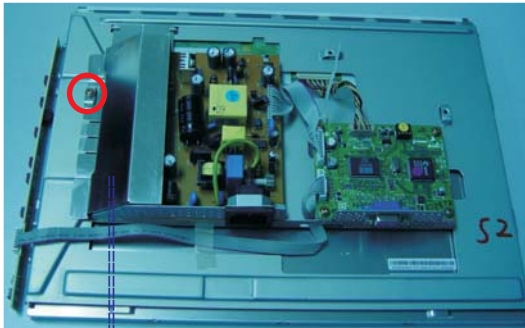


Fig. 10

100  
313815135901  
SHIELD INVERTER

Step4:

- Unscrew on screw, remove the shield inverter as shown in Fig.10.
- Unscrew seven screws as shown in Fig. 11.
- Unconnect 3 cables as shown in Fig. 11.



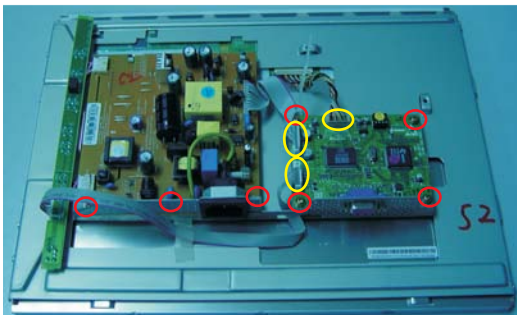


Fig. 10



Front View

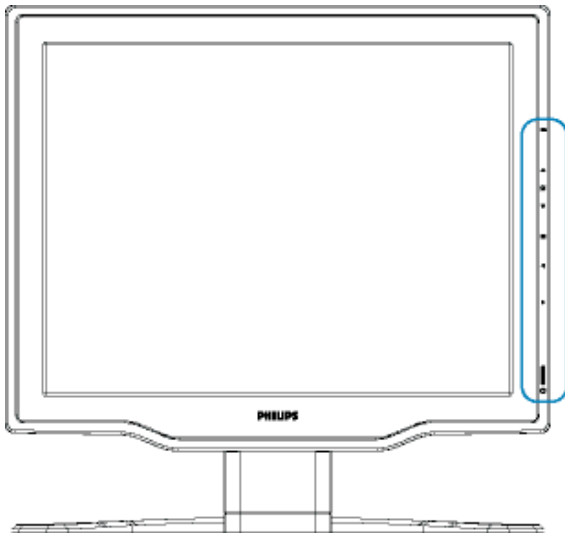

HUDSON 150C5 V200 20040705											
S - BR:	185	255									
S - CO:	100	130	160								
9300K	R	Xxx	G	Xxx	B	Xxx					
6500K	R	Xxx	G	Xxx	B	Xxx					
SRGB	R	Xxx	G	xxx	B	xxx	B	255	C	128	
OFF2	R	Xxx	G	xxx	B	xxx					
GAI	R	Xxx	G	xxx	B	xxx	M	255	m	200	
A-SUB		OK!		OSDTIMER				60			
				IDX :				7			
OFF1	R	Xxx	G	xxx	B	xxx					
SC: ADD:				VAL:			READ		WRITE		
PANEL:		3		HS 1.LG (7)	2. CPT (28)	3. HS (28)	4. QD1 (28)				
		1024x768		@74Hz	59KHz						

### How to enter Factory Mode

1. Turn off the monitor.
2. [Push "AUTO " & "OK" buttons at the same time and hold it ] + [Press power " " button until comes out "Windows screen"] => then release all button, then press "OK" button, wait until the OSD menu with Characters HUDSON 150C5 V002 20040511 (below OSD menu) come on the Screen of the monitor (see Fig. 2).



Factory Mode Indicator


Factory Menu  
Cursor can move on gray color area

- BL : Black level value
- SUB- BRI : Brightness value range( Min Max)
- SUB- CON : Contrast value range( Min Mid Max )
- SRGB- B : Brightness of sRGB
- SRGB- C : Contrast of sRGB
- Gain- m : Minimum value of User Gain
- Gain- M : Maximum value of User Gain
- AUTO- SUB : To do Auto color function when push Menu key in white pattern
- OSD TIMER: OSD time out control(sec)
- IDX : Limit current of inverter (CPT: 28) (LG:7)
- Panel TYPE :PLS reference section 2.9.6
- SCALER : Read/Write scaler register
- Panel : HS (Hannstar panel)
- CPT (CPT panel)
- LG (LG. Philips panel)

### How to Access Aging Mode

- Step 1 : Turn off LCD monitor, and disconnect Interface Cable between Monitor and PC.
- Step 2 : [Push "AUTO " & "OK" buttons at the same time and hold it] + [Press power " " button until comes out " AGING screen"] => then release all buttons.

Bring up:

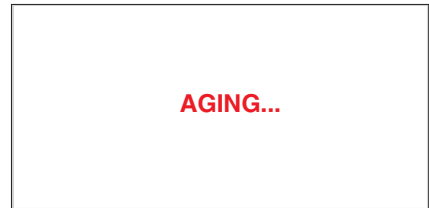

After 15 seconds, bring up:



After 15 seconds, bring up:



After 15 seconds, bring up:



-----  
-----  
repeataly  
Connect Signal cable again=> go back to normal display

## Warning Message

Item	Attention Signals	Display Time	Condition	Active off
1	CANNOT DISPLAY THIS VIDEO MODE, CHANGE COMPUTER DISPLAY INPUT TO 1024 X 768 @60Hz	30 mins	This warning appears when the input signal from your computer is not in a standard video mode or is out of the monitor's scanning range. After 30 mins, monitor enters sleeping mode.	No
2	NO VIDEO INPUT	30 mins	This message appears when there is no signal input but with cable while AC to DC while power on. After 30 mins, monitor enters sleeping mode.	Yes show floating menu "ATTENTION SIGNAL OFF"
3	CHECK CABLE CONNECTION	30 mins	This message appears when a signal cable is disconnected while monitor is working. After 30 mins, monitor enters sleeping mode	Yes show floating menu "ATTENTION SIGNAL OFF"
4	ENTER SLEEP MODE	3 secs	This message appears when monitor is about to enter power saving mode.	No
5	WAITING FOR AUTOMATIC ADJUSTMENT	Till auto adjustment finished	This message is displayed when the auto adjustment button is pressed. It disappears when automatic adjustments are completed.	No
6	USE 1024 x 768 FOR BEST RESULT	On top of OSD main menu	The message will show up at the top of the OSD main menu in red color when the input resolution is not the 1024 X 768.	Yes
7	OSD MAIN CONTROLS LOCKED	3 secs / or till "OSD MAIN CONTROLS UNLOCKED" appear	This message will appear 3 seconds to indicate the OSD MAIN CONTROLS status when to lock or un-lock it by pressing "MENU(OK)" button for more than 10 seconds while there is video input from PC. This function provides the alternative that user can lock all the OSD main control in case user don't want the OSD performance setting to be changed, for instance, during commercial exhibition.	No function when push 10 secs (if OSD lock then attention off, not any message and only attention on)
8	OSD MAIN CONTROLS UNLOCKED	3 secs	This message will appear 3 seconds to indicate the OSD MAIN CONTROLS status when to lock or un-lock it by pressing "MENU(OK)" button for more than 10 seconds while there is video input from PC.	No function when push 10 secs.
9	ATTENTION SIGNAL ON	3 secs	This message will appear 3 seconds to indicate the attention signals in ON or OFF status when to switch this function on or off by pressing the AUTO button for more than 10 seconds while at no video input from PC.	Yes
	ATTENTION SIGNAL OFF	3 secs		
10	THIS IS 85 Hz OVERSCAN, CHANGE COMPUTER DISPLAY INPUT TO 1024 X 768 @60Hz	10 mins	This message will appear 5 seconds in every 60 seconds for 10 minutes when the input of PC video timing is at 85 Hz mode. Remark: AUTO is still functional in this mode.	No
11	The window of " OSD MAIN CONTROLS"	60 secs	This message will appear when the "OK" button is pressed.	Yes
12	The window of "brightness"	60 secs	This message will appear when the "BRIGHTNESS" button is pressed.	Yes
13	"SELECTED INPUT NOT AVAILABLE"	5 secs	When just on input(analog or digital), press"input switch" or hot key, then after show this warning message 5 sec, return to original input.	TBD

## 0. Warning

All ICs and many other semi-conductors are susceptible to electrostatic discharges (ESD). Careless handling during repair can reduce life drastically. When repairing, make sure that you are connected with the same potential as the mass of the unit via a wrist wrap with resistance. Keep components and tools also at the same potential !


## 1. Servicing of SMDs (Surface Mounted Devices)

### 1.1 General cautions on handling and storage

- Oxidation on the terminals of SMDs results in poor soldering. Do not handle SMDs with bare hands.
- Avoid using storage places that are sensitive to oxidation such as places with sulphur or chlorine gas, direct sunlight, high temperatures or a high degree of humidity. The capacitance or resistance value of the SMDs may be affected by this.
- Rough handling of circuit boards containing SMDs may cause damage to the components as well as the circuit boards. Circuit boards containing SMDs should never be bent or flexed. Different circuit board materials expand and contract at different rates when heated or cooled and the components and/or solder connections may be damaged due to the stress. Never rub or scrape chip components as this may cause the value of the component to change. Similarly, do not slide the circuit board across any surface.

### 1.2 Removal of SMDs

- Heat the solder (for 2-3 seconds) at each terminal of the chip. By means of litz wire and a slight horizontal force, small components can be removed with the soldering iron. They can also be removed with a solder sucker (see Fig. 1A)

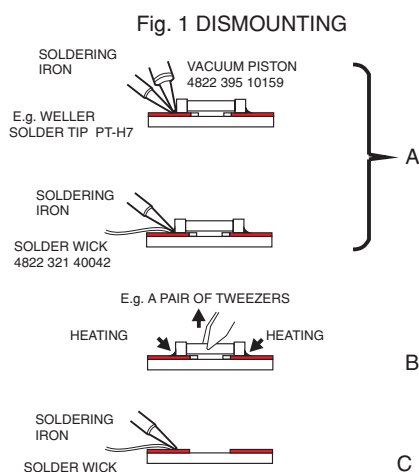

- While holding the SMD with a pair of tweezers, take it off gently using the soldering iron's heat applied to each terminal (see Fig. 1 B).
- Remove the excess solder on the solder lands by means of litz wire or a solder sucker (see Fig. 1C).

### 1.3 Caution on removal


- When handling the soldering iron, use suitable pressure and be careful.
- When removing the chip, do not use undue force with the pair of tweezers.
- The soldering iron to be used (approx. 30 W) should

Preferably be equipped with a thermal control (soldering temperature: 225 degree V to 250 degree C).  
-The chip, once removed, must never be reused.

### 1.4 Attachment of SMDs

- Locate the SMD on the solder lands by means of tweezers and solder the component on one side. Ensure that the component is positioned correctly on the solder lands (see Fig. 2A)
- Next complete the soldering of the terminals of the component. (See Fig. 2B)


Fig. 2 MONUTING


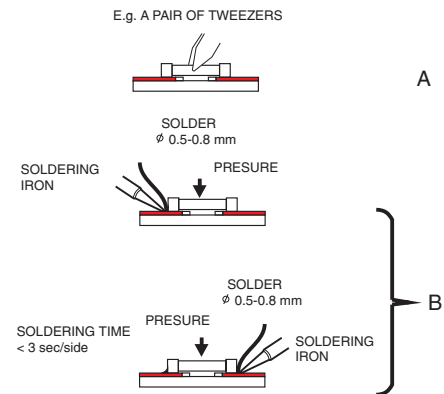




## 2. Caution when attaching SMDs



- When soldering the SMDs terminals, do not touch them directly with the soldering iron. The soldering should be done as quickly as possible, care must be taken to avoid damage to the terminals of the SMDs themselves.
- Keep the SMD's body in contact with the printed board when soldering.
- The soldering iron to be used (approx. 30W) should preferably be equipped with a thermal control (soldering temperature: 225 degree C to 250 degree C).
- Soldering should not be done outside the solder land.
- Soldering flux (of rosin) may be used, but should not be acidic.
- After soldering, let the SMDs cool down gradually at room temperature.
- The quantity of solder must be proportional to the size of the solder land. If the quantity is too great, the SMD might crack or the solder lands might be torn loose from the printed board (See Fig. 3).

Fig. 3 Examples

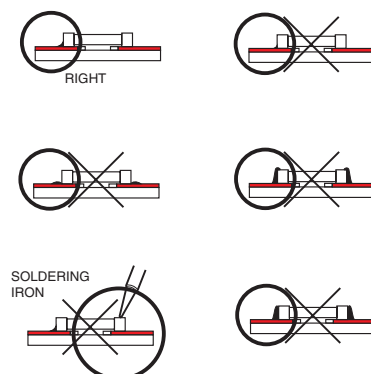


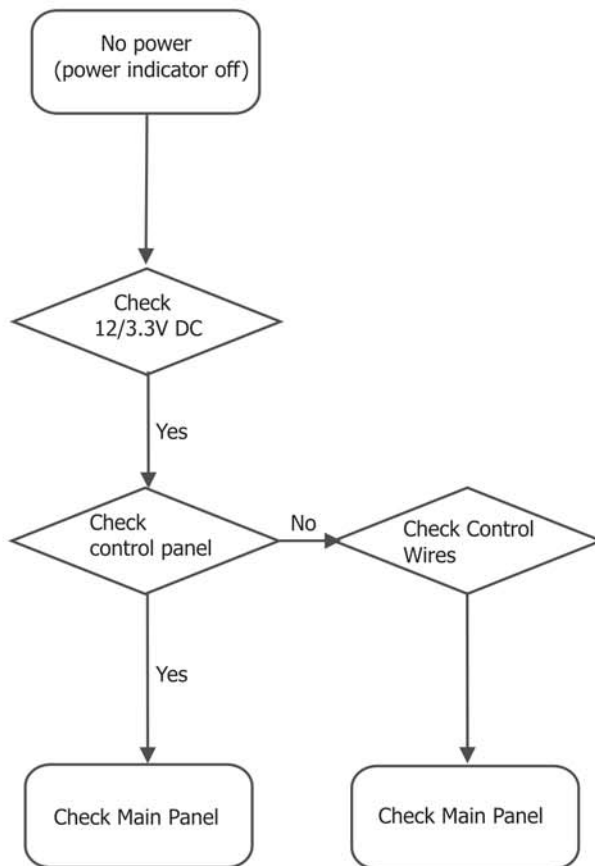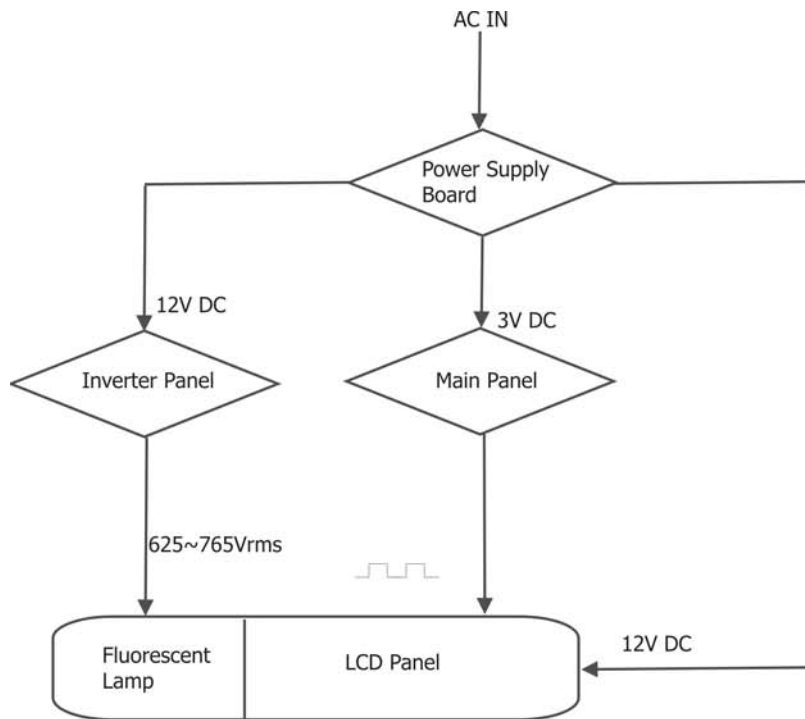

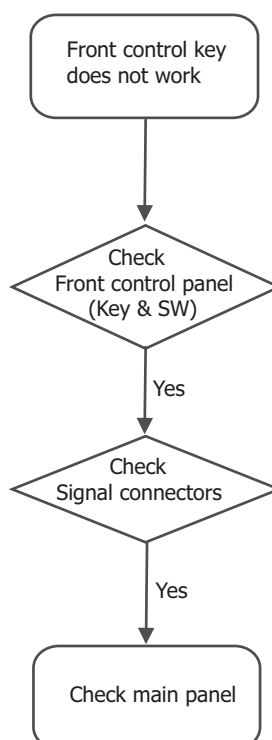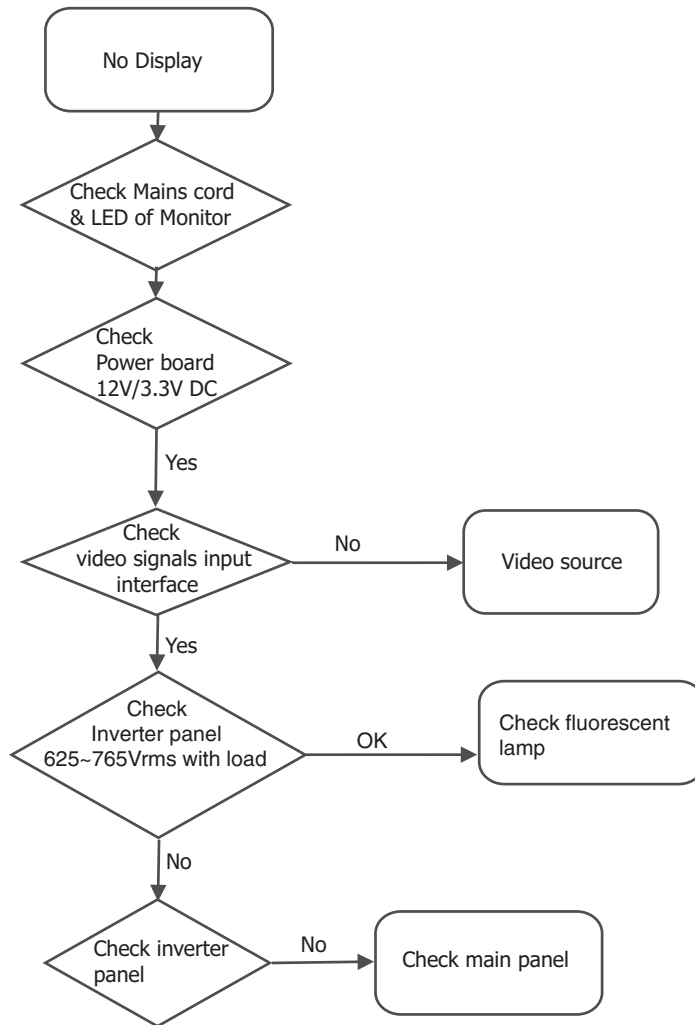

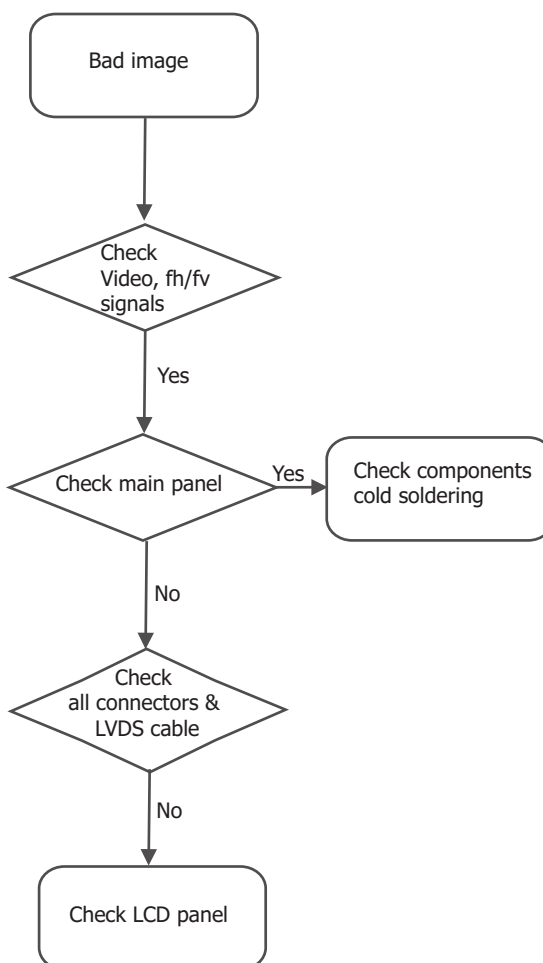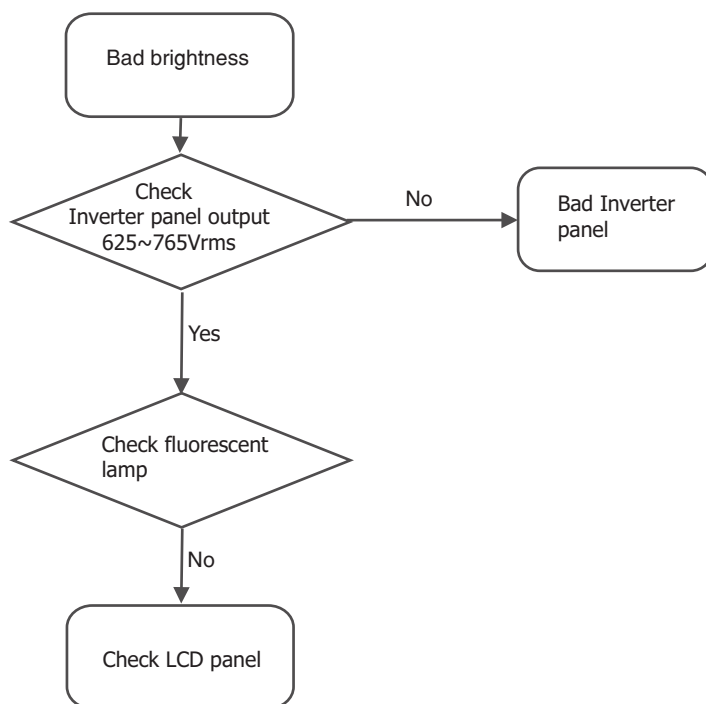




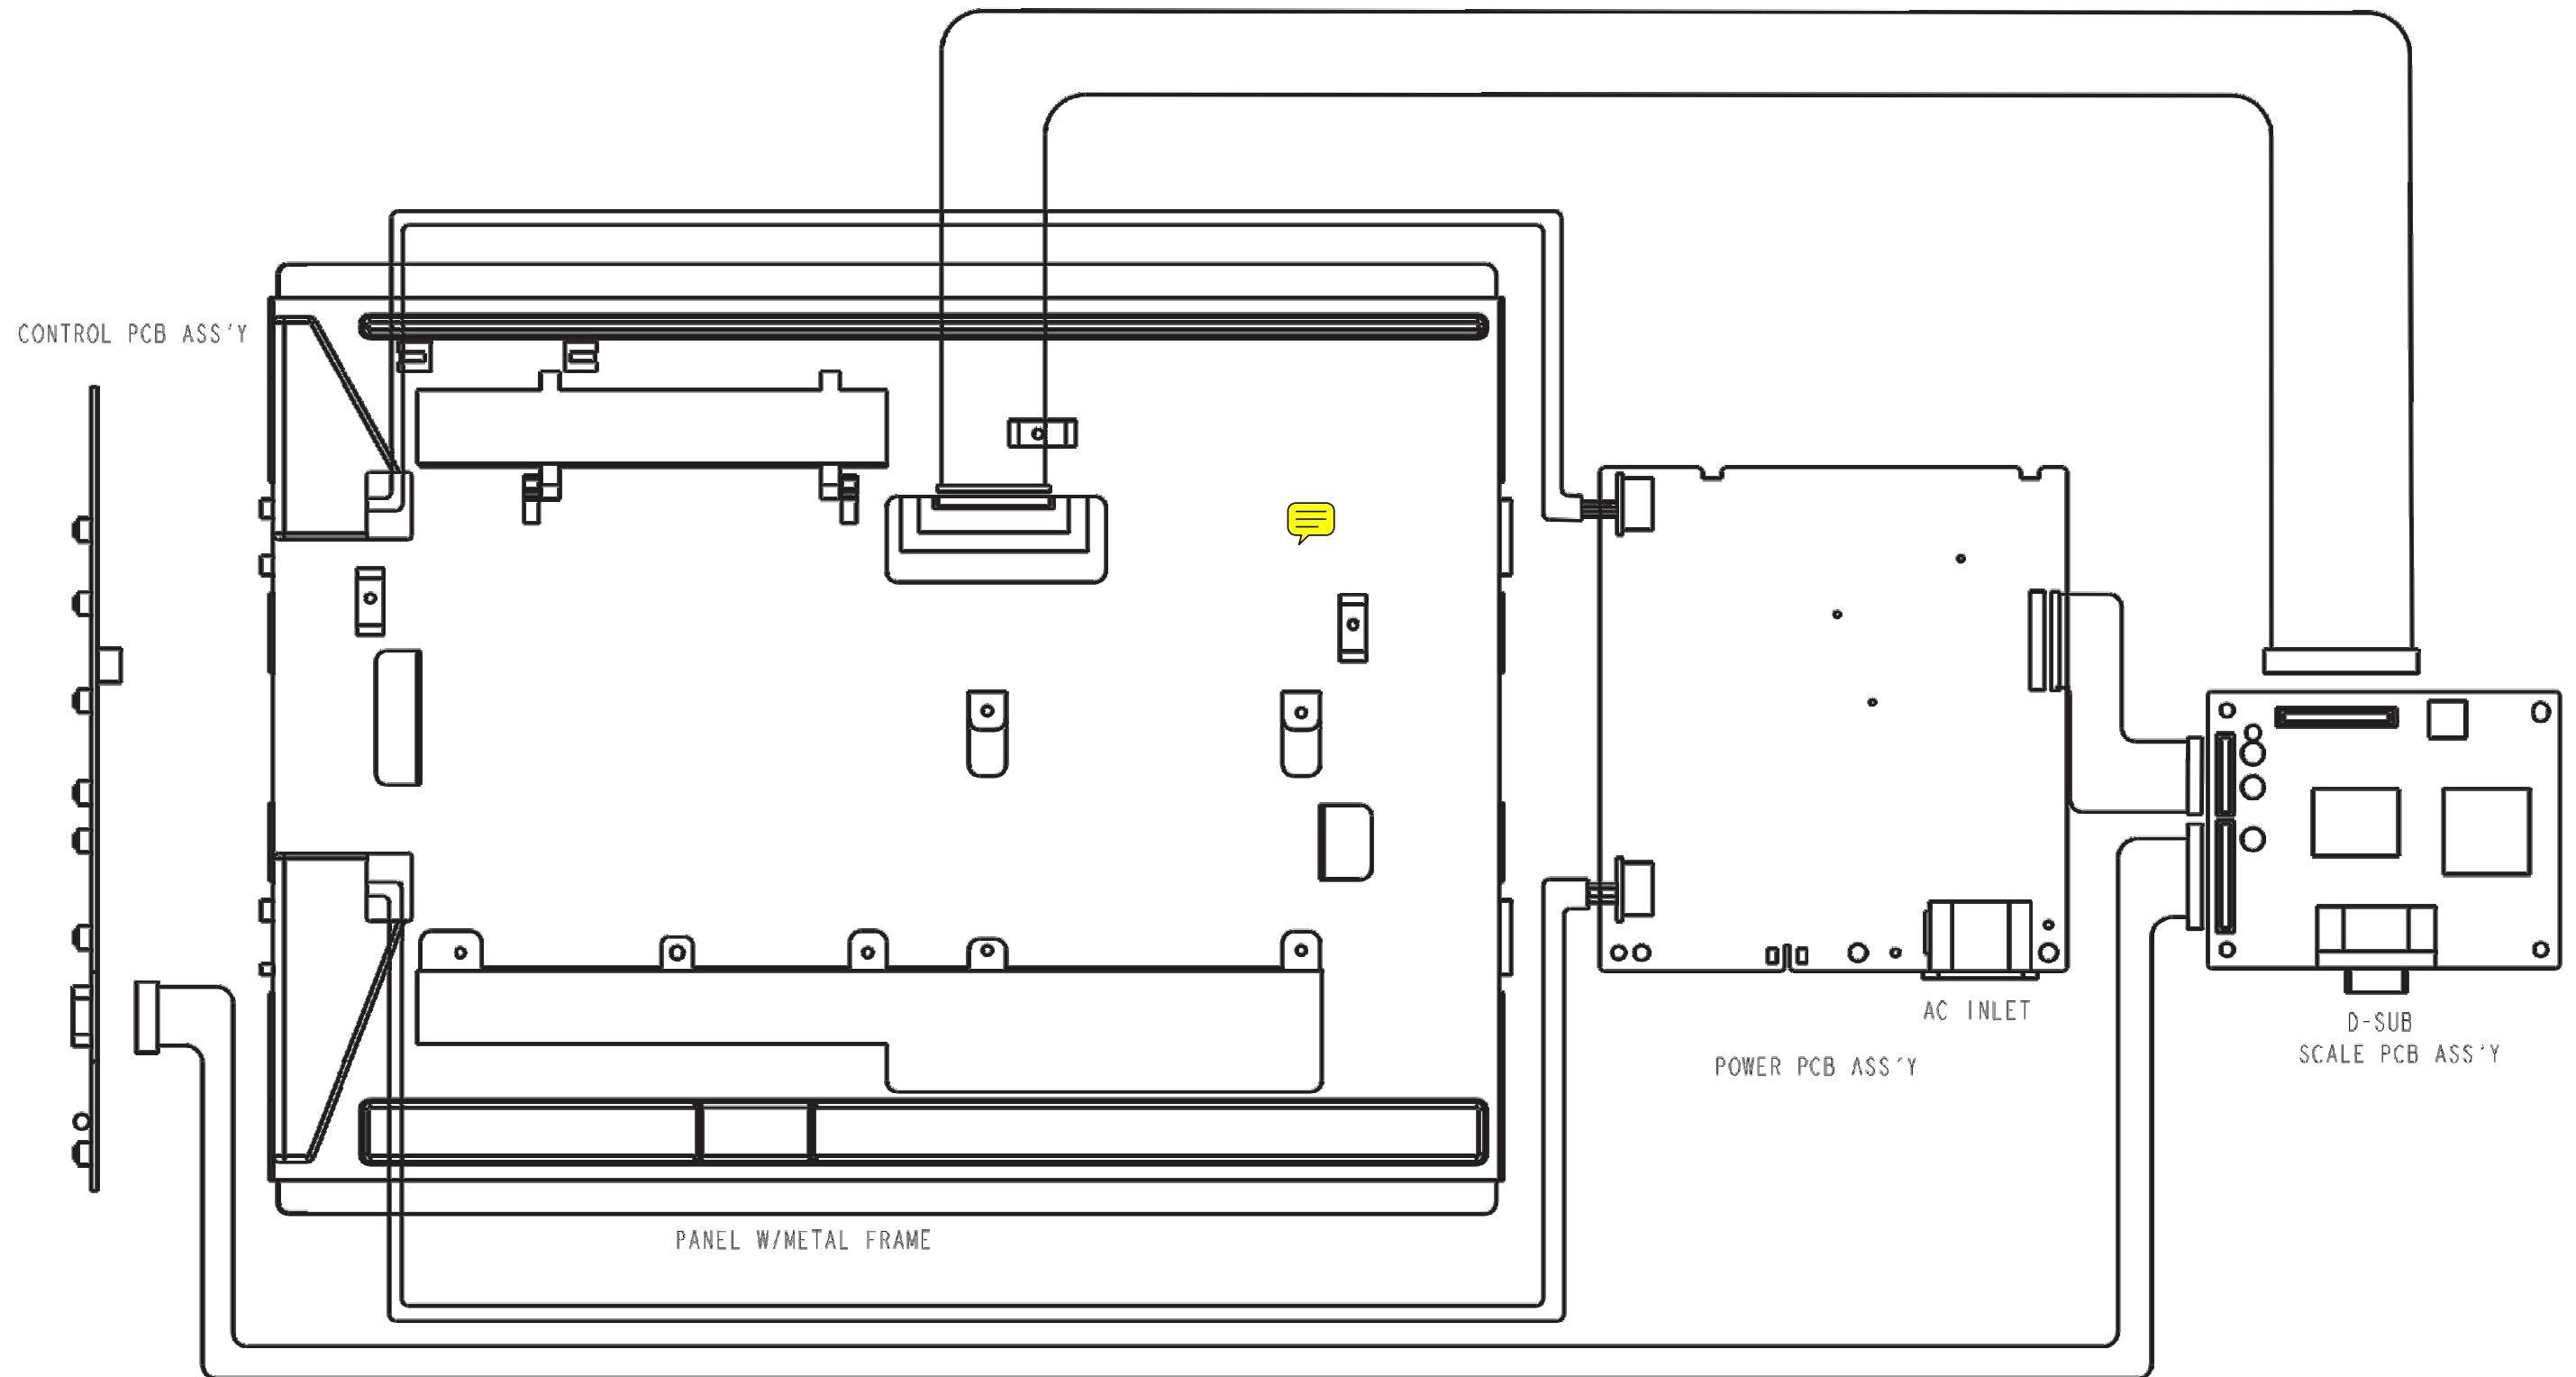


# Platform

## Functional Block

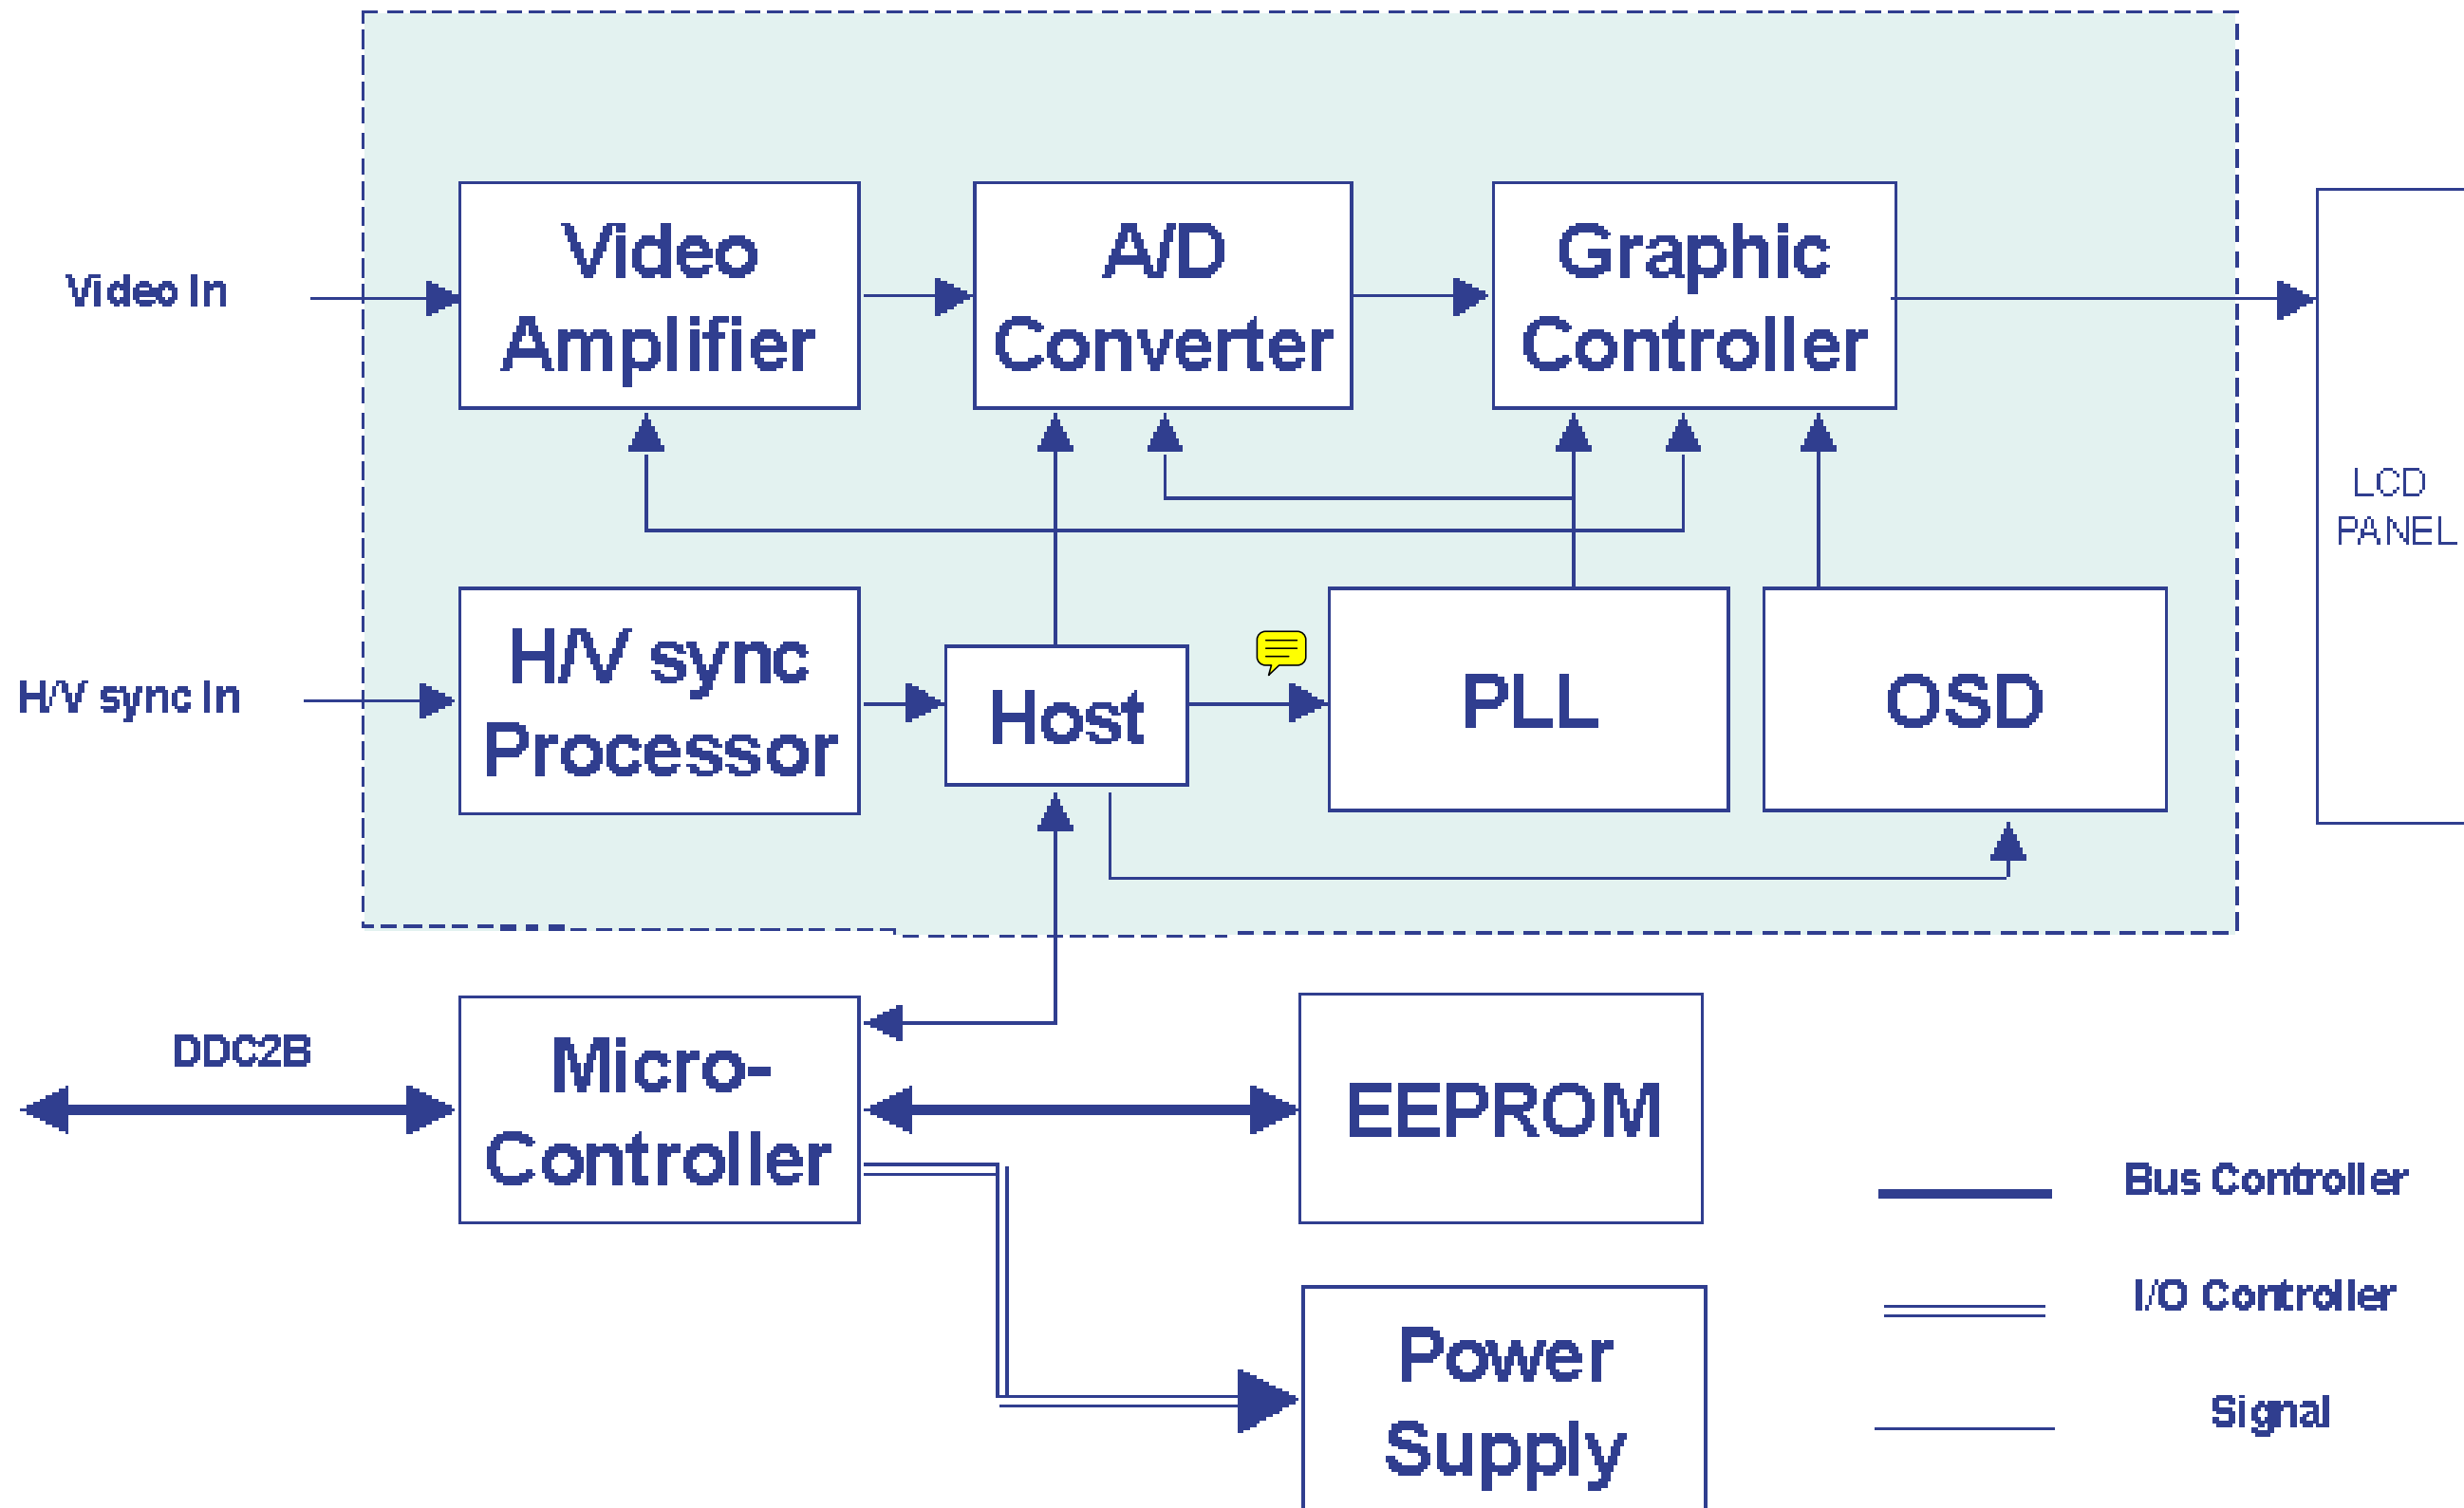

PHILIPS  
All rights reserved. Reproduction in whole or in parts is prohibited without the written consent of the copyright owner.

Alle rechten voorbehouden. Vervolijding, geheel of gedeeltelijk, is niet toegestaan dan met schriftelijke toestemming van de auteursrechtbehouder.

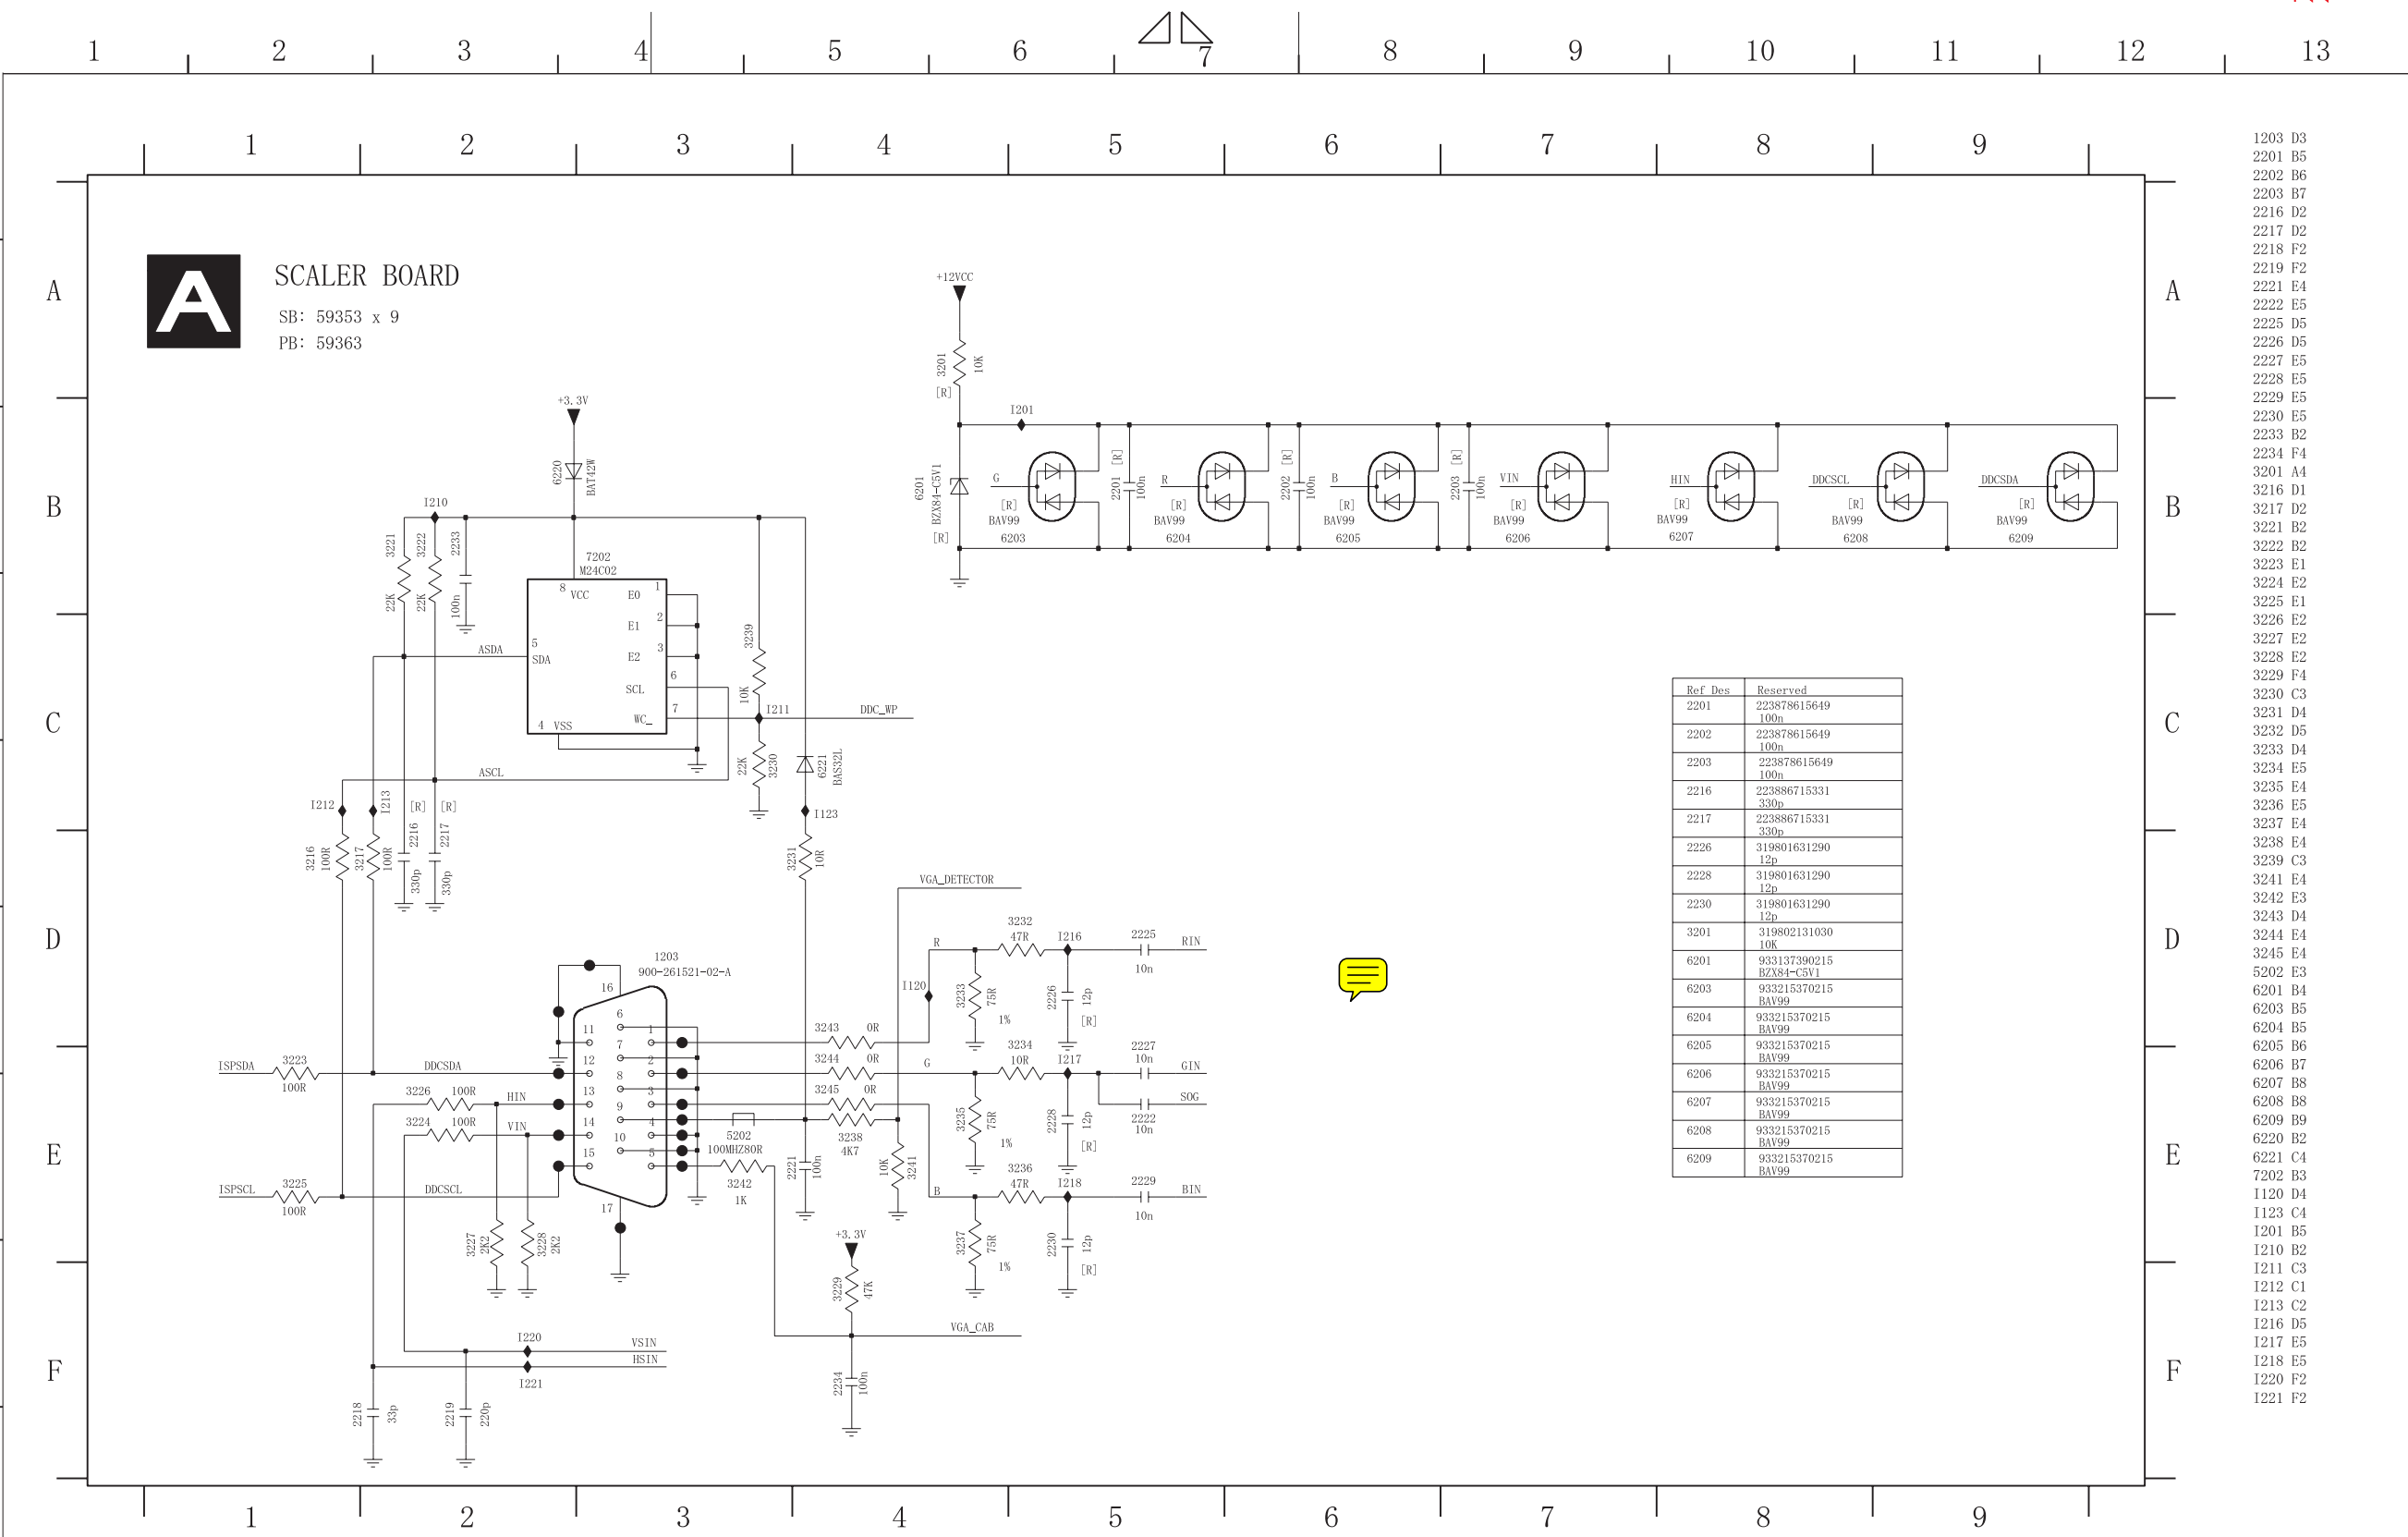

Ref Des	Reserved
2201	223878615649 100n
2202	223878615649 100n
2203	223878615649 100n
2216	223886715331 330p
2217	223886715331 330p
2226	319801631290 12p
2228	319801631290 12p
2230	319801631290 12p
3201	319802131030 10K
6201	933137390215 BZX84-C5V1
6203	933215370215 BAV99
6204	933215370215 BAV99
6205	933215370215 BAV99
6206	933215370215 BAV99
6207	933215370215 BAV99
6208	933215370215 BAV99
6209	933215370215 BAV99

- 1203 D3
- 2201 B5
- 2202 B6
- 2203 B7
- 2216 D2
- 2217 D2
- 2218 F2
- 2219 F2
- 2221 E4
- 2222 E5
- 2225 D5
- 2226 D5
- 2227 E5
- 2228 E5
- 2229 E5
- 2230 E5
- 2233 B2
- 2234 F4
- 3201 A4
- 3216 D1
- 3217 D2
- 3221 B2
- 3222 B2
- 3223 E1
- 3224 E2
- 3225 E1
- 3226 E2
- 3227 E2
- 3228 E2
- 3229 F4
- 3230 C3
- 3231 D4
- 3232 D5
- 3233 D4
- 3234 E5
- 3235 E4
- 3236 E5
- 3237 E4
- 3238 E4
- 3239 C3
- 3241 E4
- 3242 E3
- 3243 D4
- 3244 E4
- 3245 E4
- 5202 E3
- 6201 B4
- 6203 B5
- 6204 B5
- 6205 B6
- 6206 B7
- 6207 B8
- 6208 B8
- 6209 B9
- 6220 B2
- 6221 C4
- 7202 B3
- 1120 D4
- 1123 C4
- 1201 B5
- 1210 B2
- 1211 C3
- 1212 C1
- 1213 C2
- 1216 D5
- 1217 E5
- 1218 E5
- 1220 F2
- 1221 F2

EXCEPT 1203 WERE CHIP COMPONENTS.

CHN	ECO-	SETNAME	XH4 ( HUDSON4-150C5 )	
CLASS_No	DSUB		1	
2004-05-28	3	150C5BS/00	3138 158 6019	
NAME	Jerry Chen/Joss Hung	SUPERS.	4	10
MGr	CHECK *****	DATE	2004-05-28	130 -
© KONINKLIJKE PHILIPS ELECTRONICS N.V. 2000				

Scaler Schematic Diagram-2


PHILIPS

All rights reserved. Reproduction in whole or in parts is prohibited without the written consent of the copyright owner.

Alle rechten voorbehouden. Vervoelvuldiging, geheel of gedeeltelijk, is niet toegestaan dan met schriftelijke toestemming van de auteursrechtbehebende.

1 2 3 4 5 6 7 8 9 10 11 12 13

1 2 3 4 5 6 7 8 9

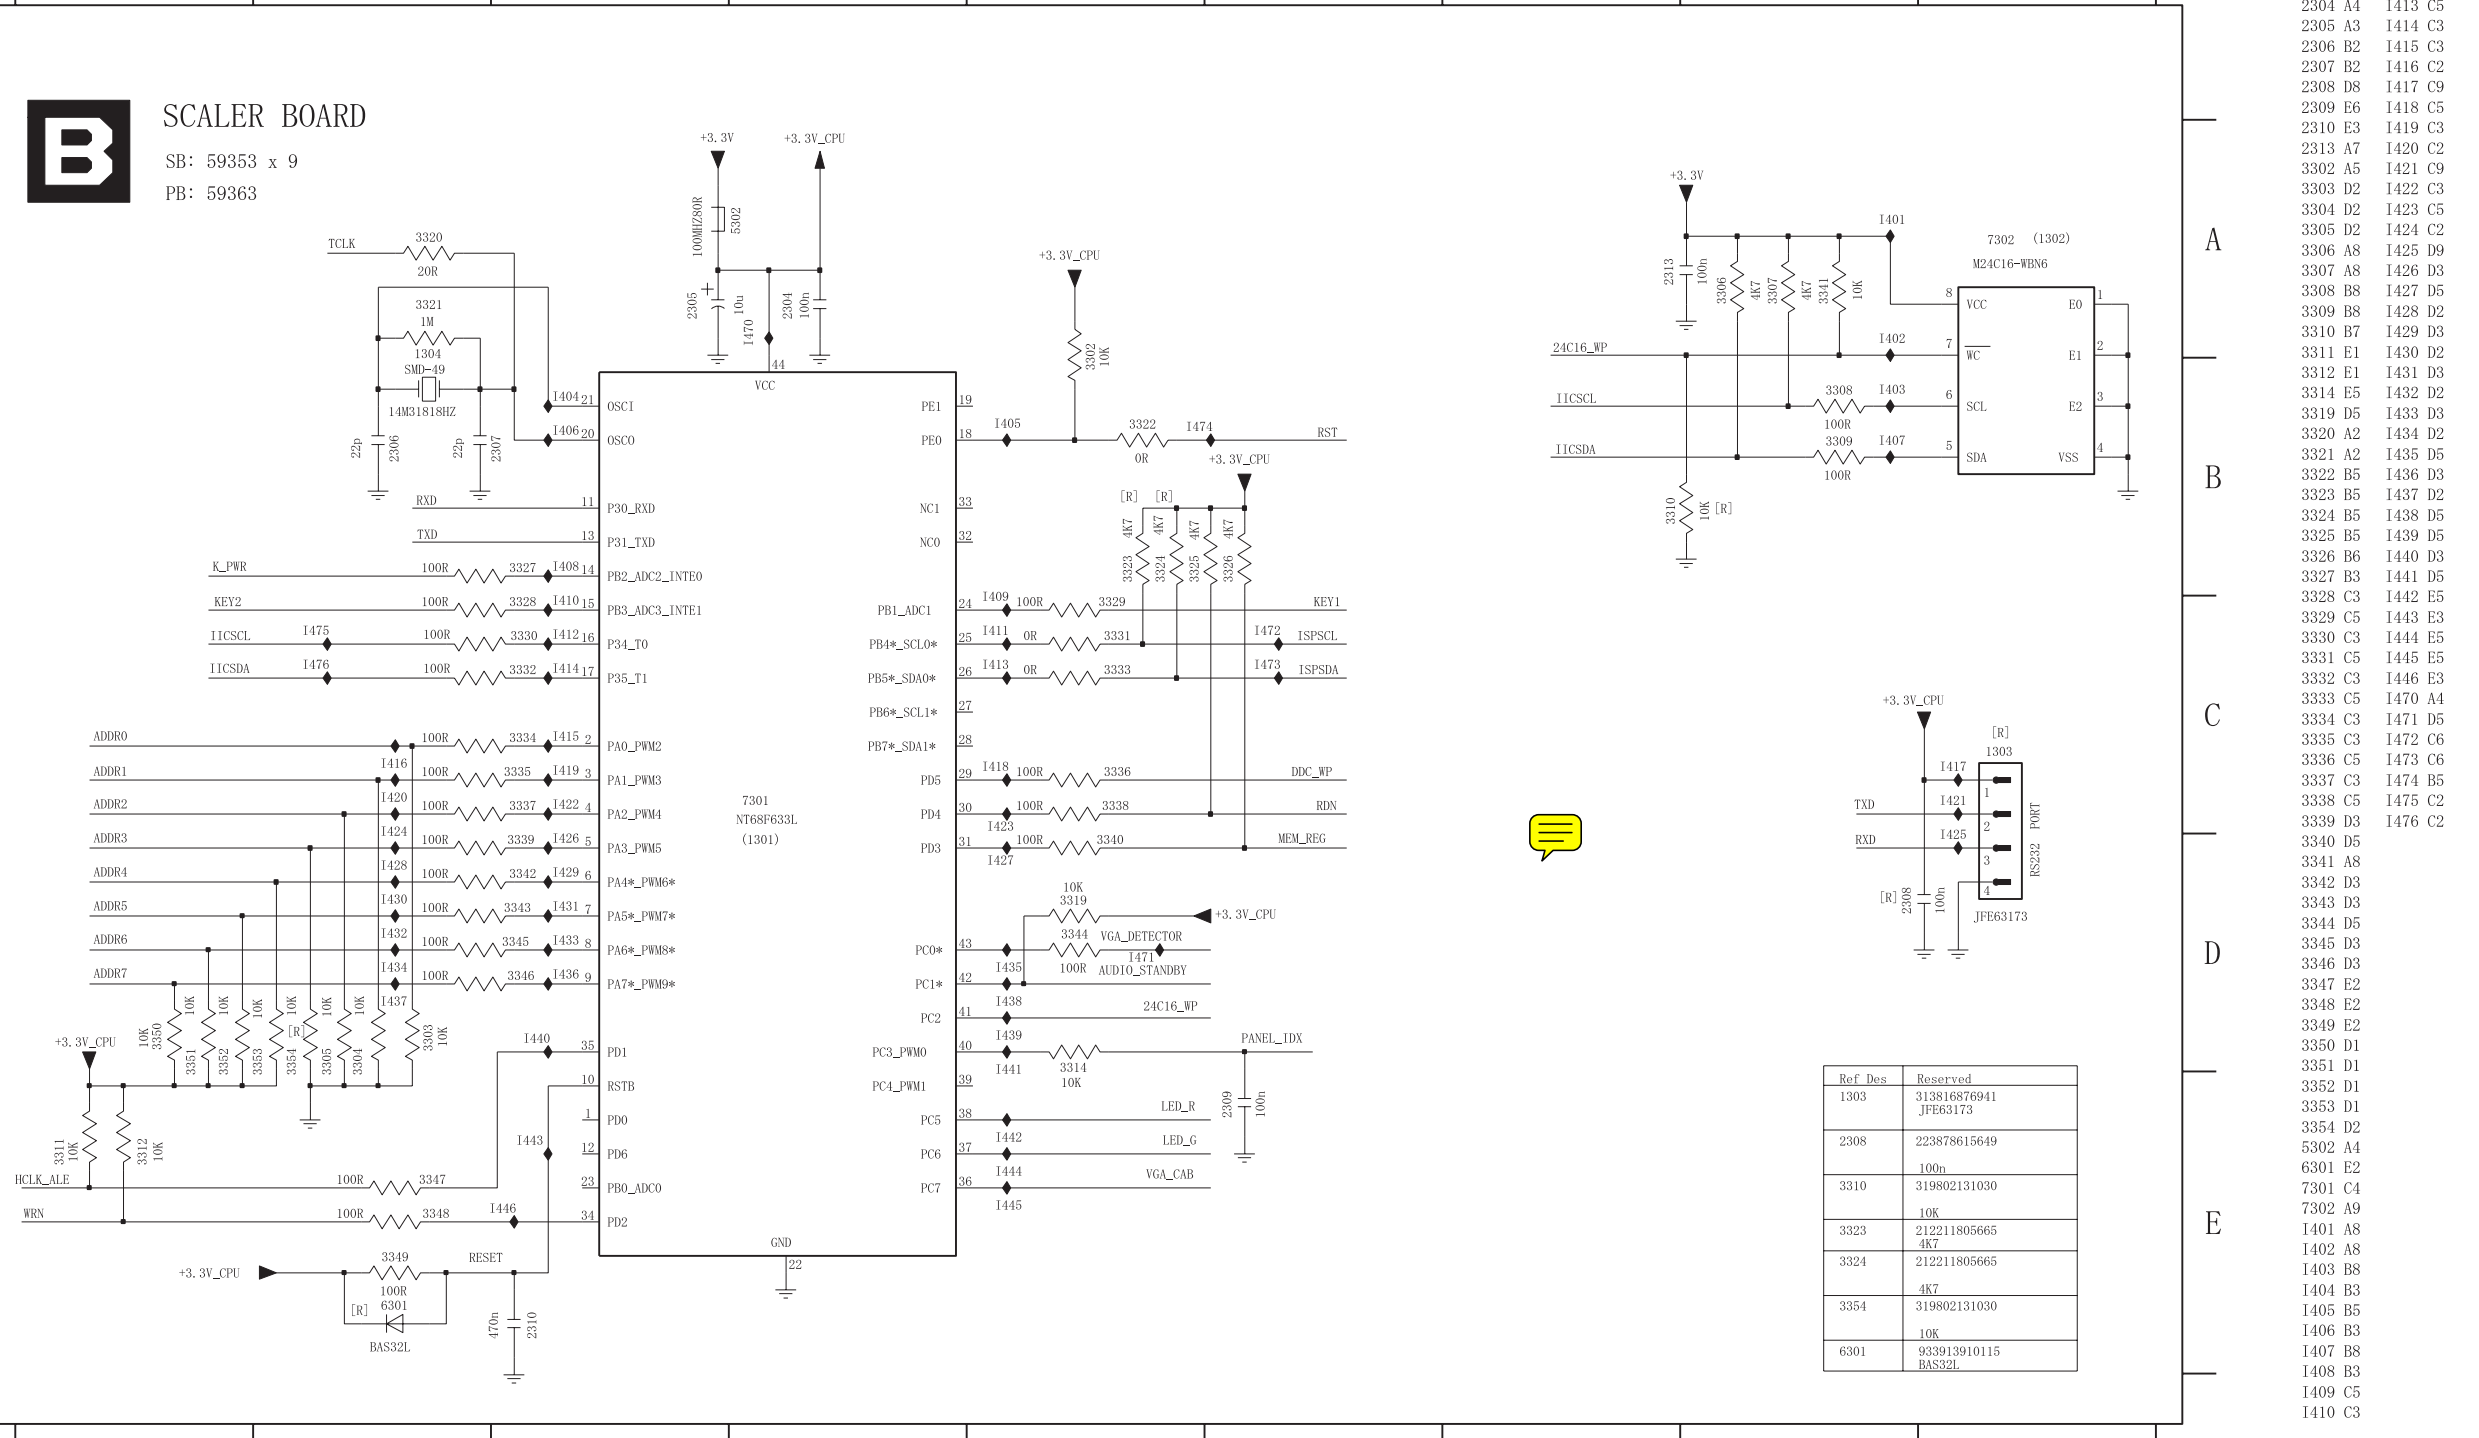

1303	C9	1411	C5
1304	B2	1412	C3
2304	A4	1413	C5
2305	A3	1414	C3
2306	B2	1415	C3
2307	B2	1416	C2
2308	D8	1417	C9
2309	E6	1418	C5
2310	E3	1419	C3
2313	A7	1420	C2
3302	A5	1421	C9
3303	D2	1422	C3
3304	D2	1423	C5
3305	D2	1424	C2
3306	A8	1425	D9
3307	A8	1426	D3
3308	B8	1427	D5
3309	B8	1428	D2
3310	B7	1429	D3
3311	E1	1430	D2
3312	E1	1431	D3
3314	E5	1432	D2
3319	D5	1433	D3
3320	A2	1434	D2
3321	A2	1435	D5
3322	B5	1436	D3
3323	B5	1437	D2
3324	B5	1438	D5
3325	B5	1439	D5
3326	B6	1440	D3
3327	B3	1441	D5
3328	C3	1442	E5
3329	C5	1443	E3
3330	C3	1444	E5
3331	C5	1445	E5
3332	C3	1446	E3
3333	C5	1470	A4
3334	C3	1471	D5
3335	C3	1472	C6
3336	C5	1473	C6
3337	C3	1474	B5
3338	C5	1475	C2
3339	D3	1476	C2
3340	D5		
3341	A8		
3342	D3		
3343	D3		
3344	D5		
3345	D3		
3346	D3		
3347	E2		
3348	E2		
3349	E2		
3350	D1		
3351	D1		
3352	D1		
3353	D1		
3354	D2		
5302	A4		
6301	E2		
7301	C4		
7302	A9		
1401	A8		
1402	A8		
1403	B8		
1404	B3		
1405	B5		
1406	B3		
1407	B8		
1408	B3		
1409	C5		
1410	C3		

Ref Des	Reserved
1303	313816876941 JFE63173
2308	223878615649
	100n
3310	319802131030 10K
3323	212211805665 4K7
3324	212211805665 4K7
3354	319802131030 10K
6301	933913910115 BAS32L


EXCEPT 1303, 7302 WERE CHIP COMPONENTS.

CHN	ECO-	SETNAME	XH4 ( HUDSON4-150C5 )	
CLASS_NO		MICRO		1
		150C5BS/00		3138 158 6019
2004-05-28	3			
NAME	Jerry Chen/Joss Hung	SUPERS.	4	10
	MG	CHECK	*****	DATE
				2004-05-28
				130 - 2
				*** A3
© KONINKLIJKE PHILIPS ELECTRONICS N.V. 2000				

PHILIPS

All rights reserved. Reproduction in whole or in parts is prohibited without the written consent of the copyright owner.

Alle rechten voorbehouden. Vervoelvolgding, geheel of gedeeltelijk, is niet toegestaan dan met schriftelijke toestemming van de auteursrechtbehouder.

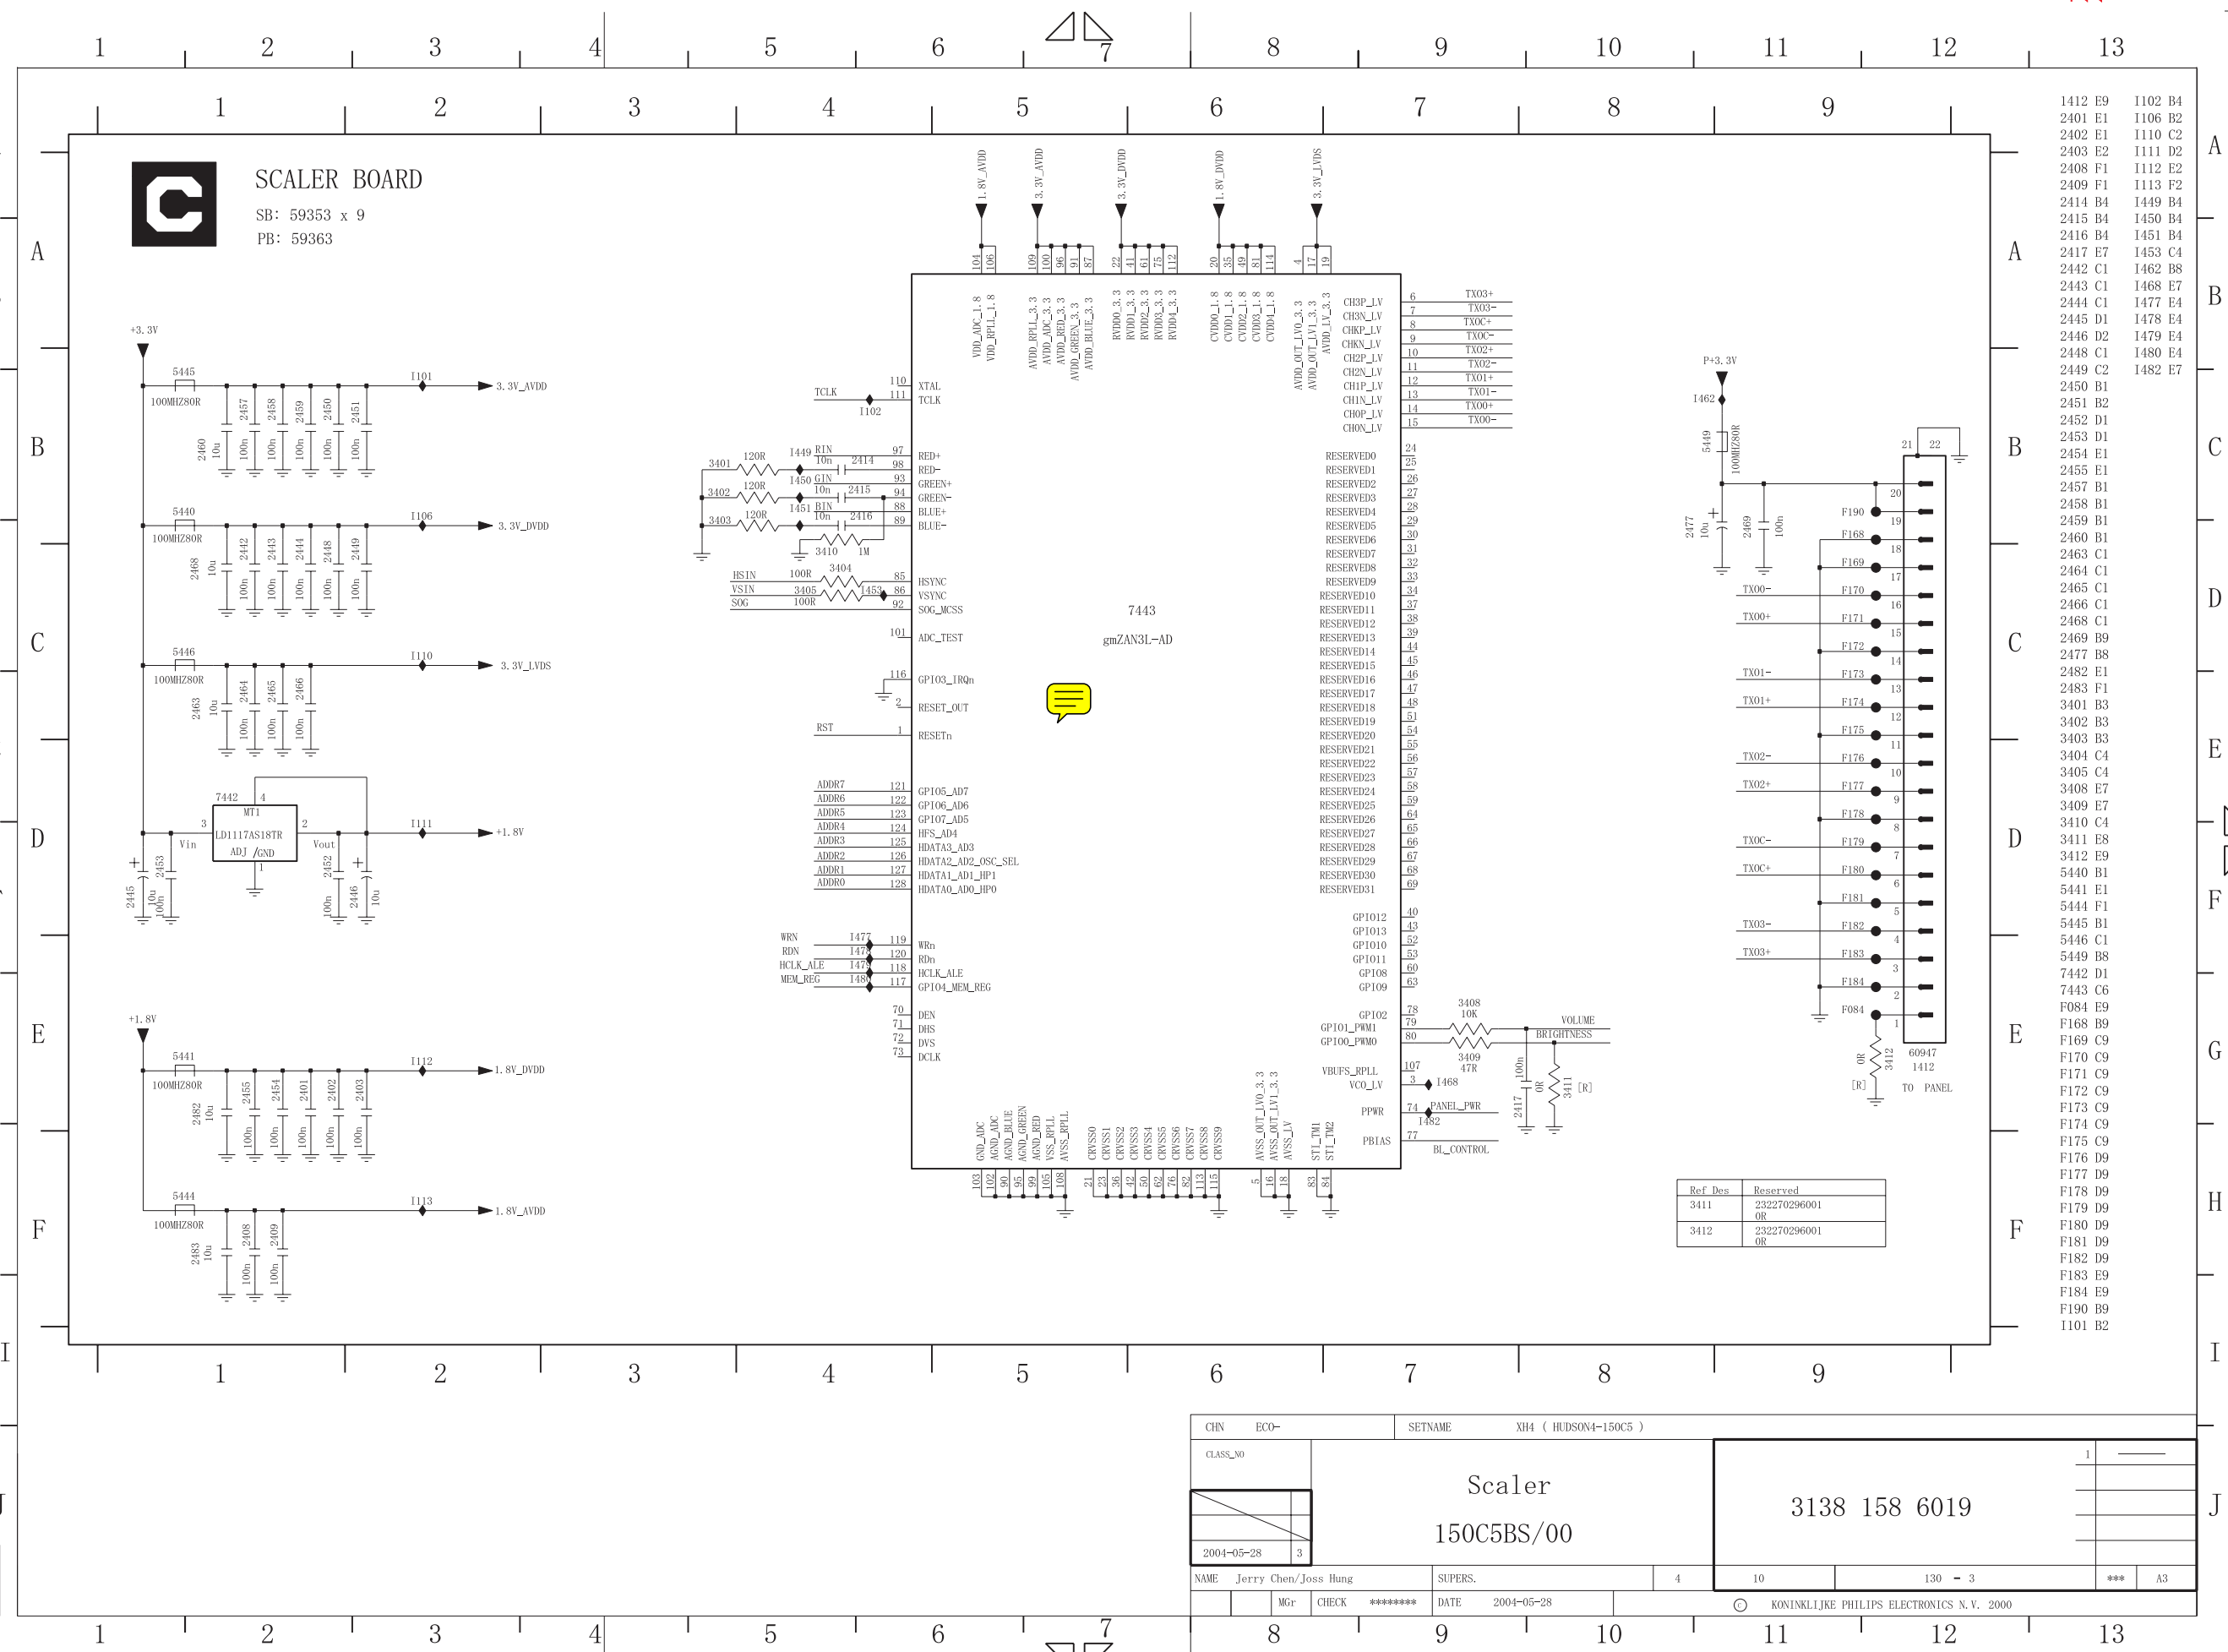

Ref Des	Reserved
3411	232270296001
3412	232270296001

CHN	ECO-	SETNAME	XH4 ( HUDSON4-150C5 )	
CLASS_00			Scaler	3138 158 6019
			150C5BS/00	
2004-05-28	3			
NAME	Jerry Chen/Joss Hung	SUPERS.	4	130 - 3
MGr	CHECK *****	DATE	2004-05-28	*** A3
			© KONINKLIJKE PHILIPS ELECTRONICS N.V. 2000	

Scaler Schematic Diagram-4



PHILIPS

All rights reserved. Reproduction in whole or in parts is prohibited without the written consent of the copyright owner.



Alle rechten voorbehouden. Verveelvoudiging, geheel of gedeeltelijk, is niet toegestaan dan met schriftelijke toestemming van de auteursrechtshoudende.



**SCALER BOARD**  
SB: 59353 x 9  
PB: 59363

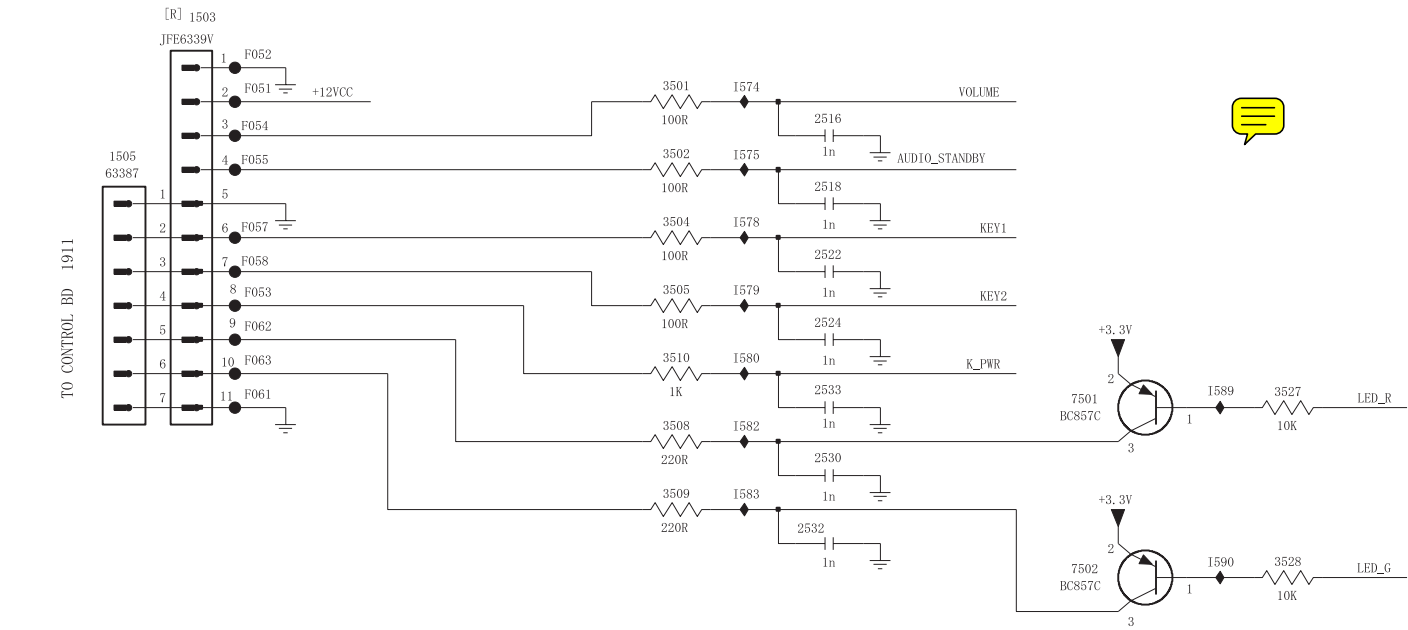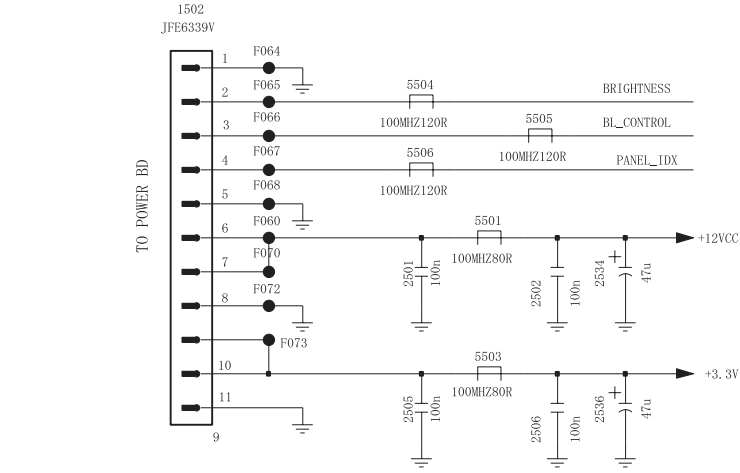

Ref Des	Reserved
1503	313816872071_JFE6339V

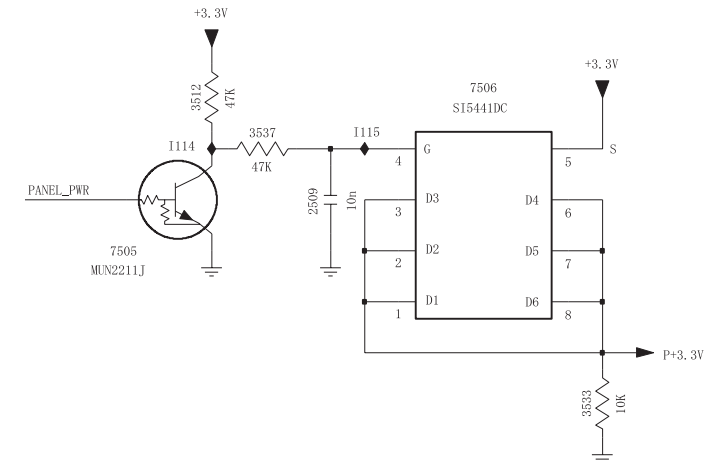

- 1502 B1
- 1503 D1
- 1505 D1
- 2501 C2
- 2502 C3
- 2505 C2
- 2506 C3
- 2509 C8
- 2516 D4
- 2518 D4
- 2522 E4
- 2524 E4
- 2530 E4
- 2532 F4
- 2533 E4
- 2534 C3
- 2536 C3
- 3501 D3
- 3502 D3
- 3504 D3
- 3505 E3
- 3506 E8
- 3507 E8
- 3508 E3
- 3509 F3
- 3510 E3
- 3512 B8
- 3527 E6
- 3528 F6
- 3532 E8
- 3533 D9
- 3537 C8
- 5501 B2
- 5503 C2
- 5504 B2
- 5505 B3
- 5506 B2
- 7501 E5
- 7502 F5
- 7505 C7
- 7506 B9
- F051 D1
- F052 D1
- F053 E1
- F054 D1
- F055 D1
- F057 D1
- F058 E1
- F060 B1
- F061 E1
- F062 E1
- F063 E1
- F064 B1
- F065 B1
- F066 B1
- F067 B1
- F068 B1
- F070 C1
- F072 C1
- F073 C2
- I114 C7
- I115 B8
- I574 D3
- I575 D3
- I578 D3
- I579 E3
- I580 E3
- I582 E3
- I583 F3
- I589 E5
- I590 F5

EXCEPT 1502, 1503, 1505 WERE CHIP COMPONENTS.

CHN	ECO-	SETNAME	XH4 ( HUDSON4-150C5 )	
CLASS_NO	CONNECTOR		1	
2004-05-28	3	150C5BS/00	3138 158 6019	
NAME	Jerry Chen/Joss Hung	SUPERS.	4	130 - 4
CHECK	DATE	2004-05-28	© KONINKLIJKE PHILIPS ELECTRONICS N.V. 2000	



Scaler Board C.B.A-1

Go to cover page


PHILIPS



ALL RIGHTS ARE RESERVED. REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE COPYRIGHT OWNER.



f

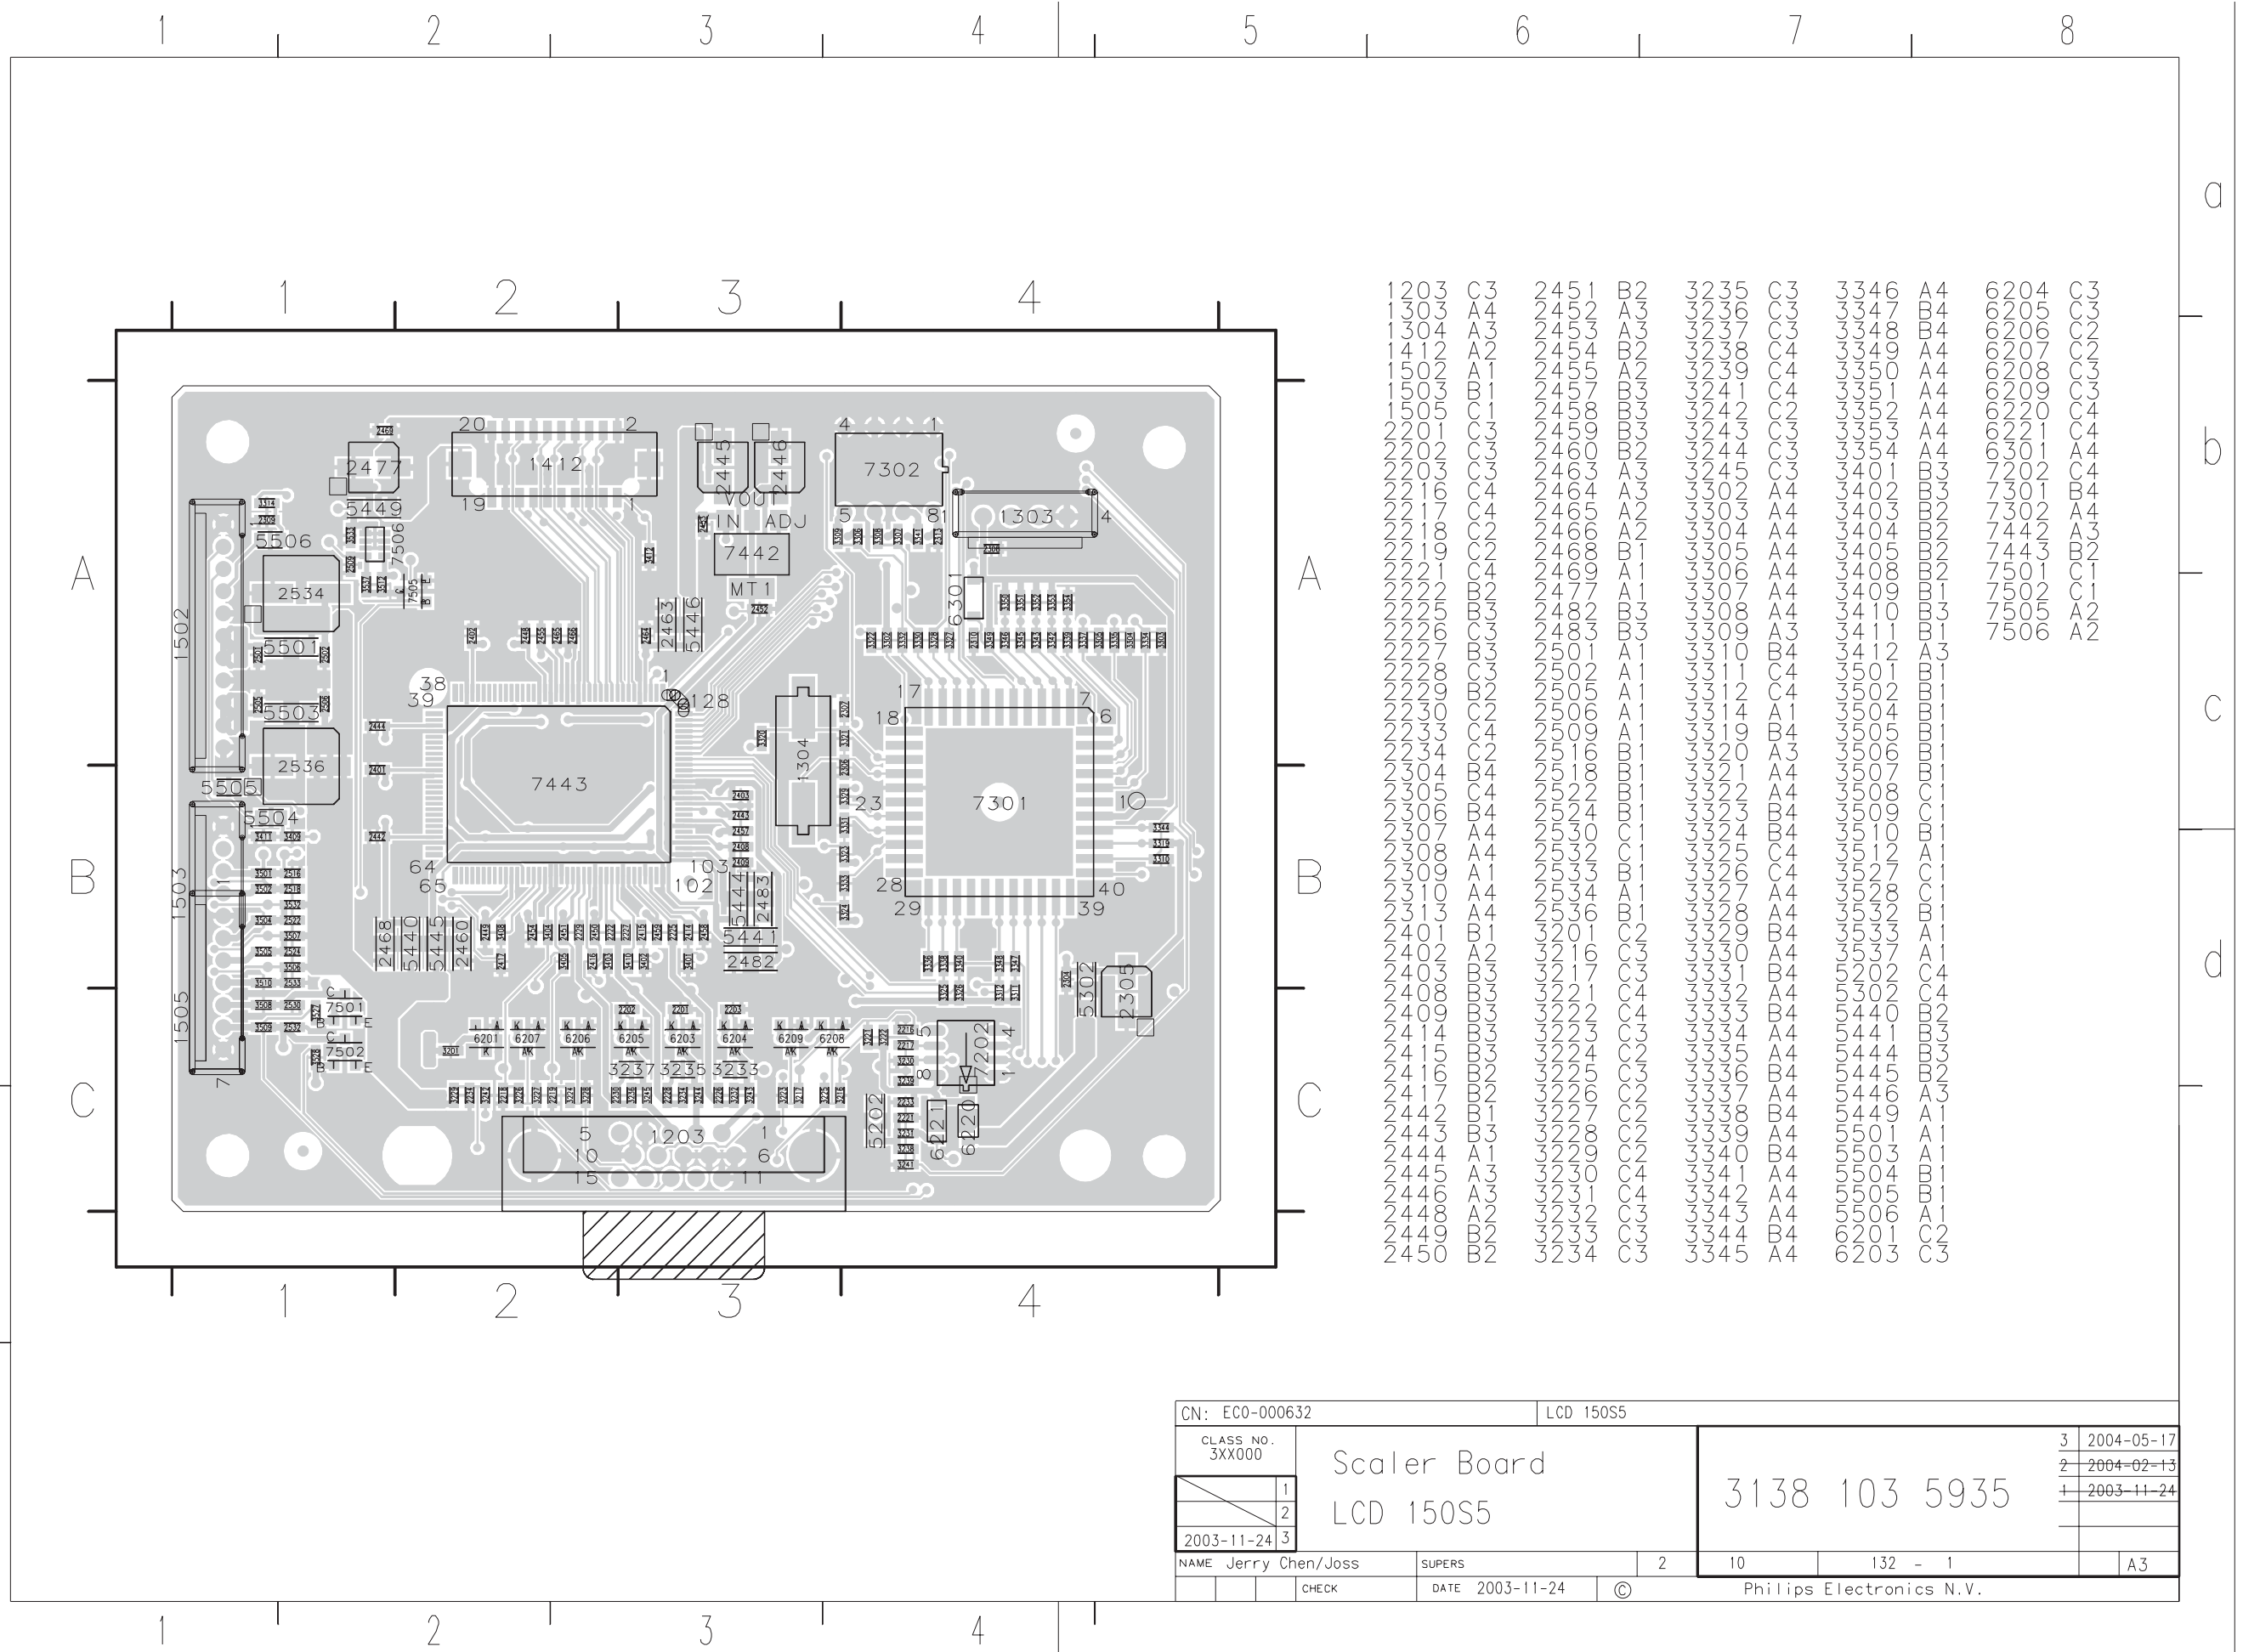

120	C3
130	A4
141	A2
1412	A3
145	B2
150	A1
1503	B1
1505	B3
1506	B3
1507	B3
1508	B3
1509	B3
1510	B3
1511	B3
1512	B3
1513	B3
1514	B3
1515	B3
1516	B3
1517	B3
1518	B3
1519	B3
1520	B3
1521	B3
1522	B3
1523	B3
1524	B3
1525	B3
1526	B3
1527	B3
1528	B3
1529	B3
1530	B3
1531	B3
1532	B3
1533	B3
1534	B3
1535	B3
1536	B3
1537	B3
1538	B3
1539	B3
1540	B3
1541	B3
1542	B3
1543	B3
1544	B3
1545	B3
1546	B3
1547	B3
1548	B3
1549	B3
1550	B3
1551	B3
1552	B3
1553	B3
1554	B3
1555	B3
1556	B3
1557	B3
1558	B3
1559	B3
1560	B3
1561	B3
1562	B3
1563	B3
1564	B3
1565	B3
1566	B3
1567	B3
1568	B3
1569	B3
1570	B3
1571	B3
1572	B3
1573	B3
1574	B3
1575	B3
1576	B3
1577	B3
1578	B3
1579	B3
1580	B3
1581	B3
1582	B3
1583	B3
1584	B3
1585	B3
1586	B3
1587	B3
1588	B3
1589	B3
1590	B3
1591	B3
1592	B3
1593	B3
1594	B3
1595	B3
1596	B3
1597	B3
1598	B3
1599	B3
1600	B3

CN: ECO-000632		LCD 150S5	
CLASS NO. 3XX000	Scaler Board	3	2004-05-17
	LCD 150S5	2	2004-02-13
		+	2003-11-24
NAME Jerry Chen/Joss	SUPERS	2	10
CHECK	DATE 2003-11-24	©	Philips Electronics N.V.

Scaler Board C.B.A-2

Go to cover page

PHILIPS




ALL RIGHTS ARE RESERVED. REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE COPYRIGHT OWNER.



e

f

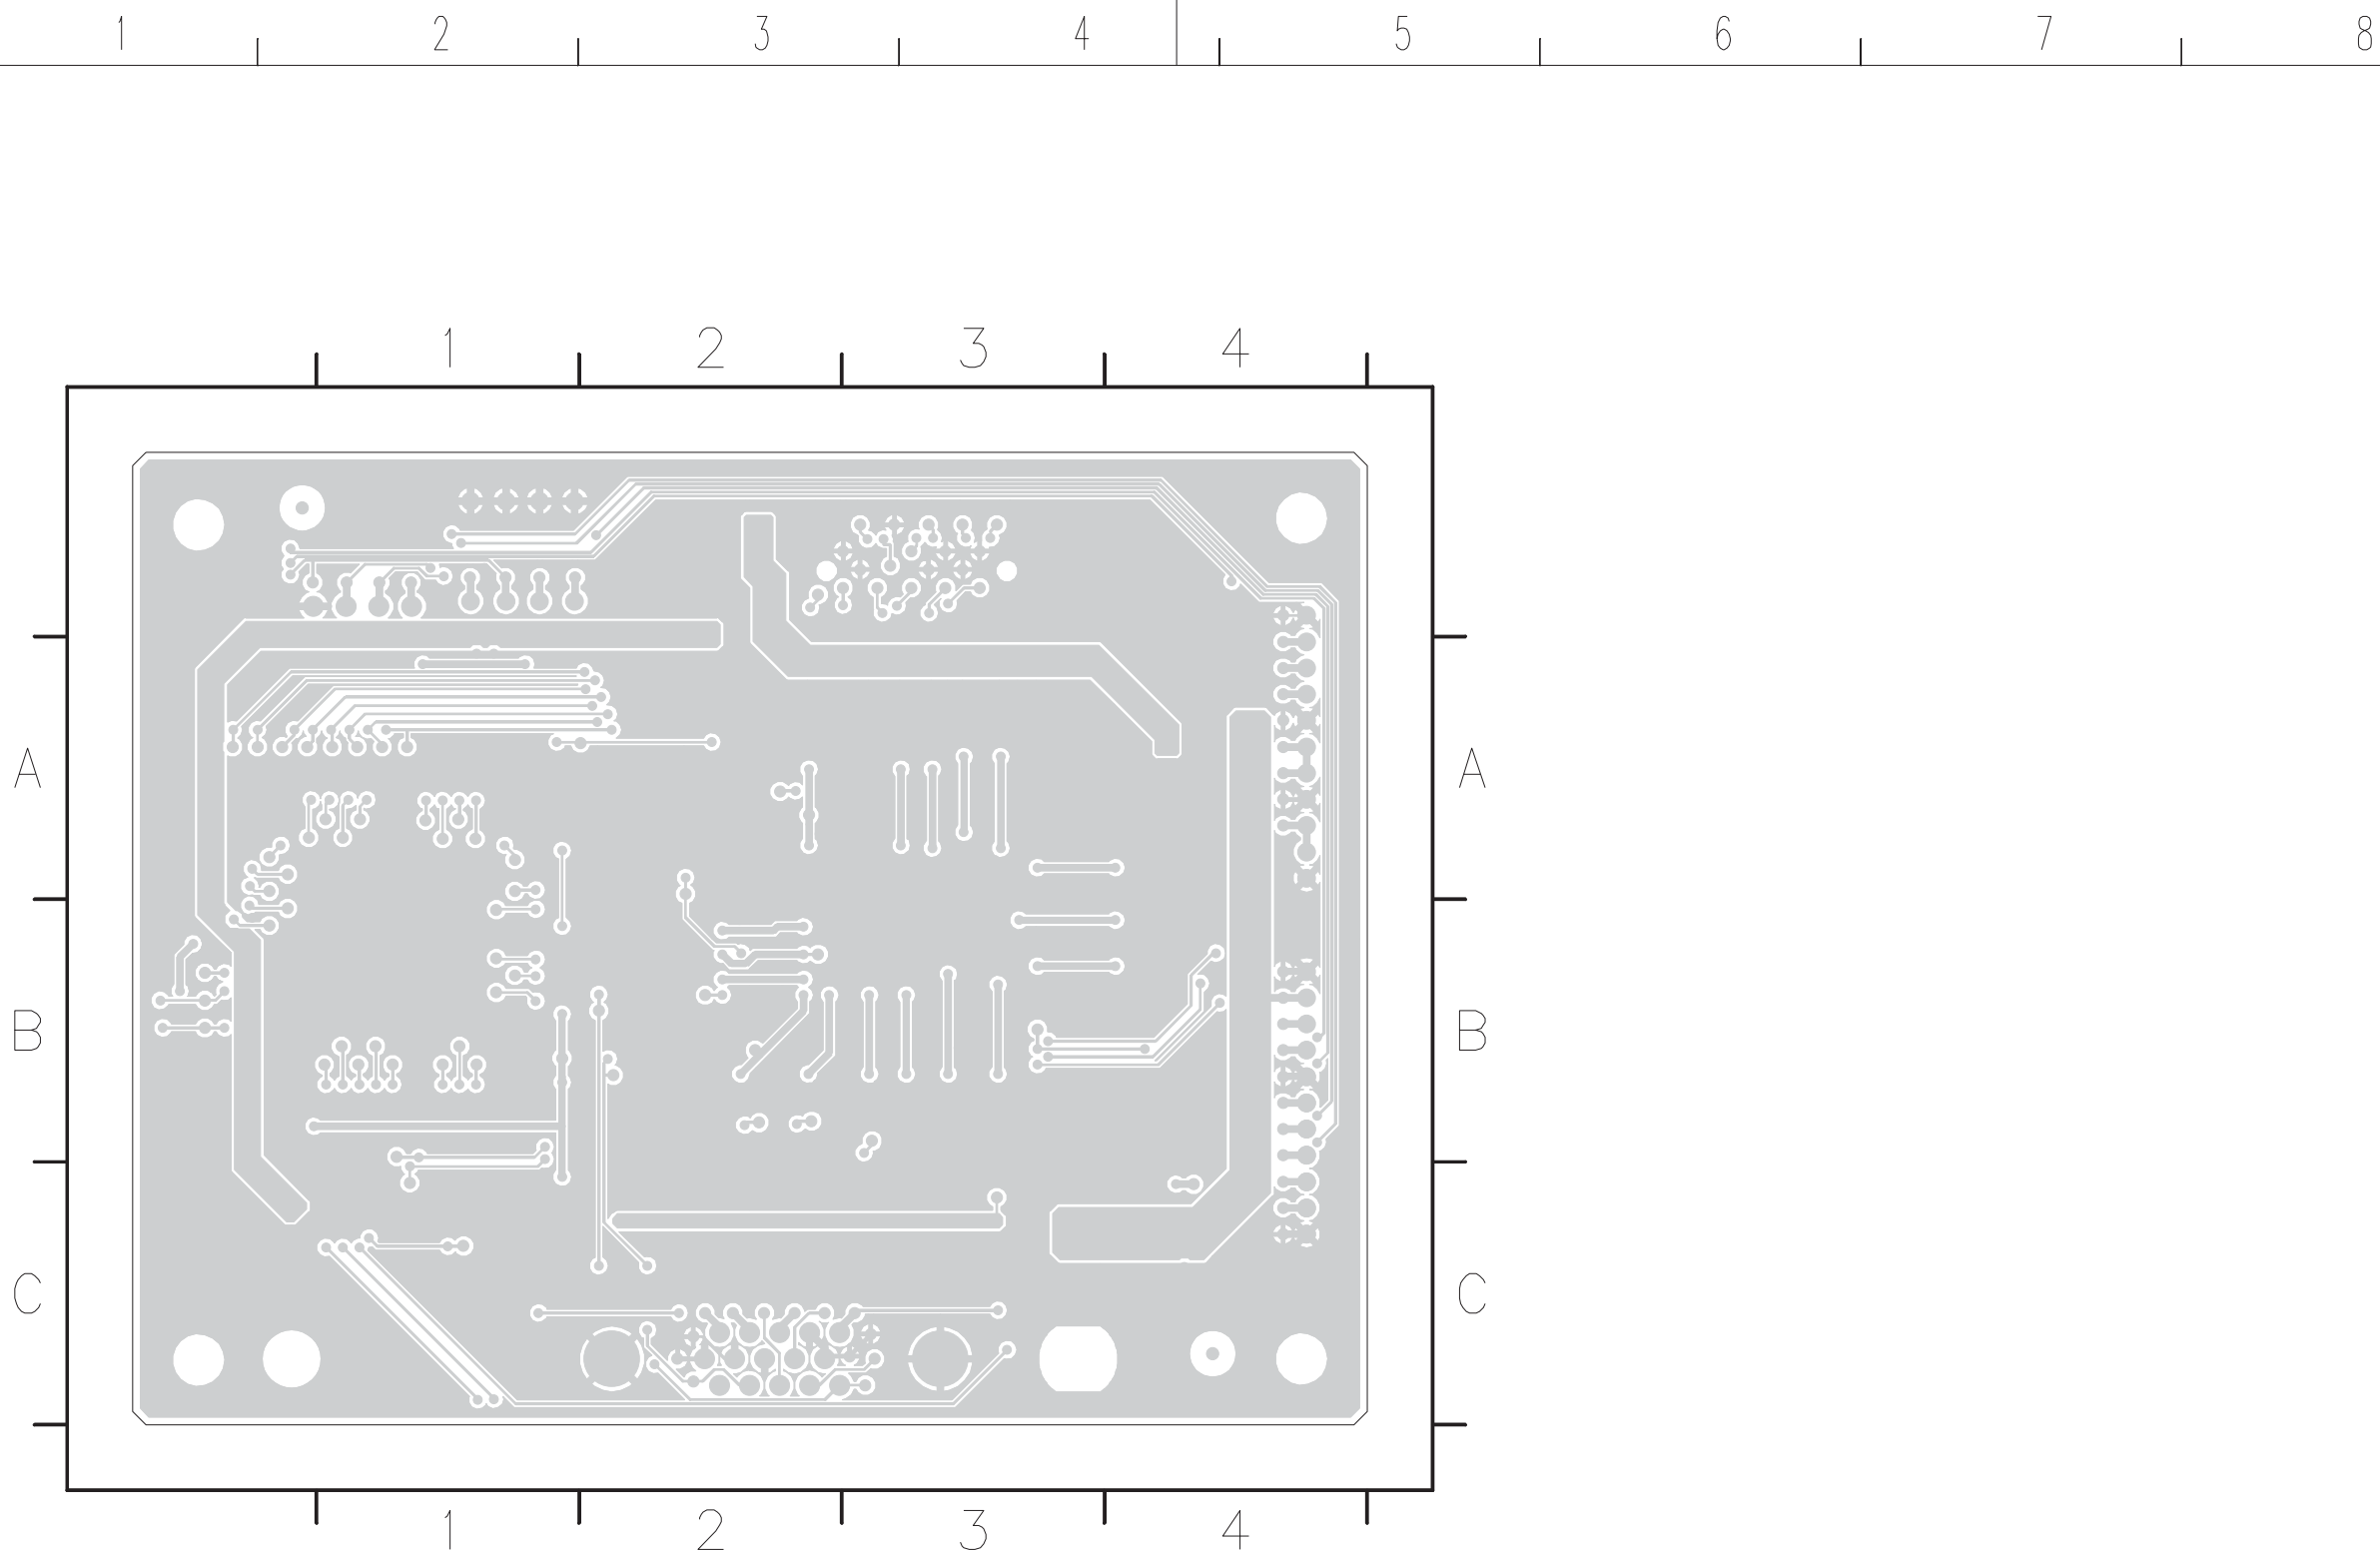


CN: ECO-000632		LCD 150S5	
CLASS NO. 3XX000	Scaler Board	3	2004-05-17
1	LCD 150S5	2	2004-02-13
2		+	2003-11-24
2003-11-24	3		
NAME Jerry Chen/Joss	SUPERS	2	10
			132 - 2
CHECK	DATE 2003-11-24	©	Philips Electronics N.V.
			A3

Go to cover page

PHILIPS

All rights reserved. Reproduction in whole or in parts is prohibited without the written consent of the copyright owner.

Alle rechten voorbehouden. Vervoluiding, geheel of gedeeltelijk, is niet toegestaan dan met schriftelijke toestemming van de auteursrechtbehouder.

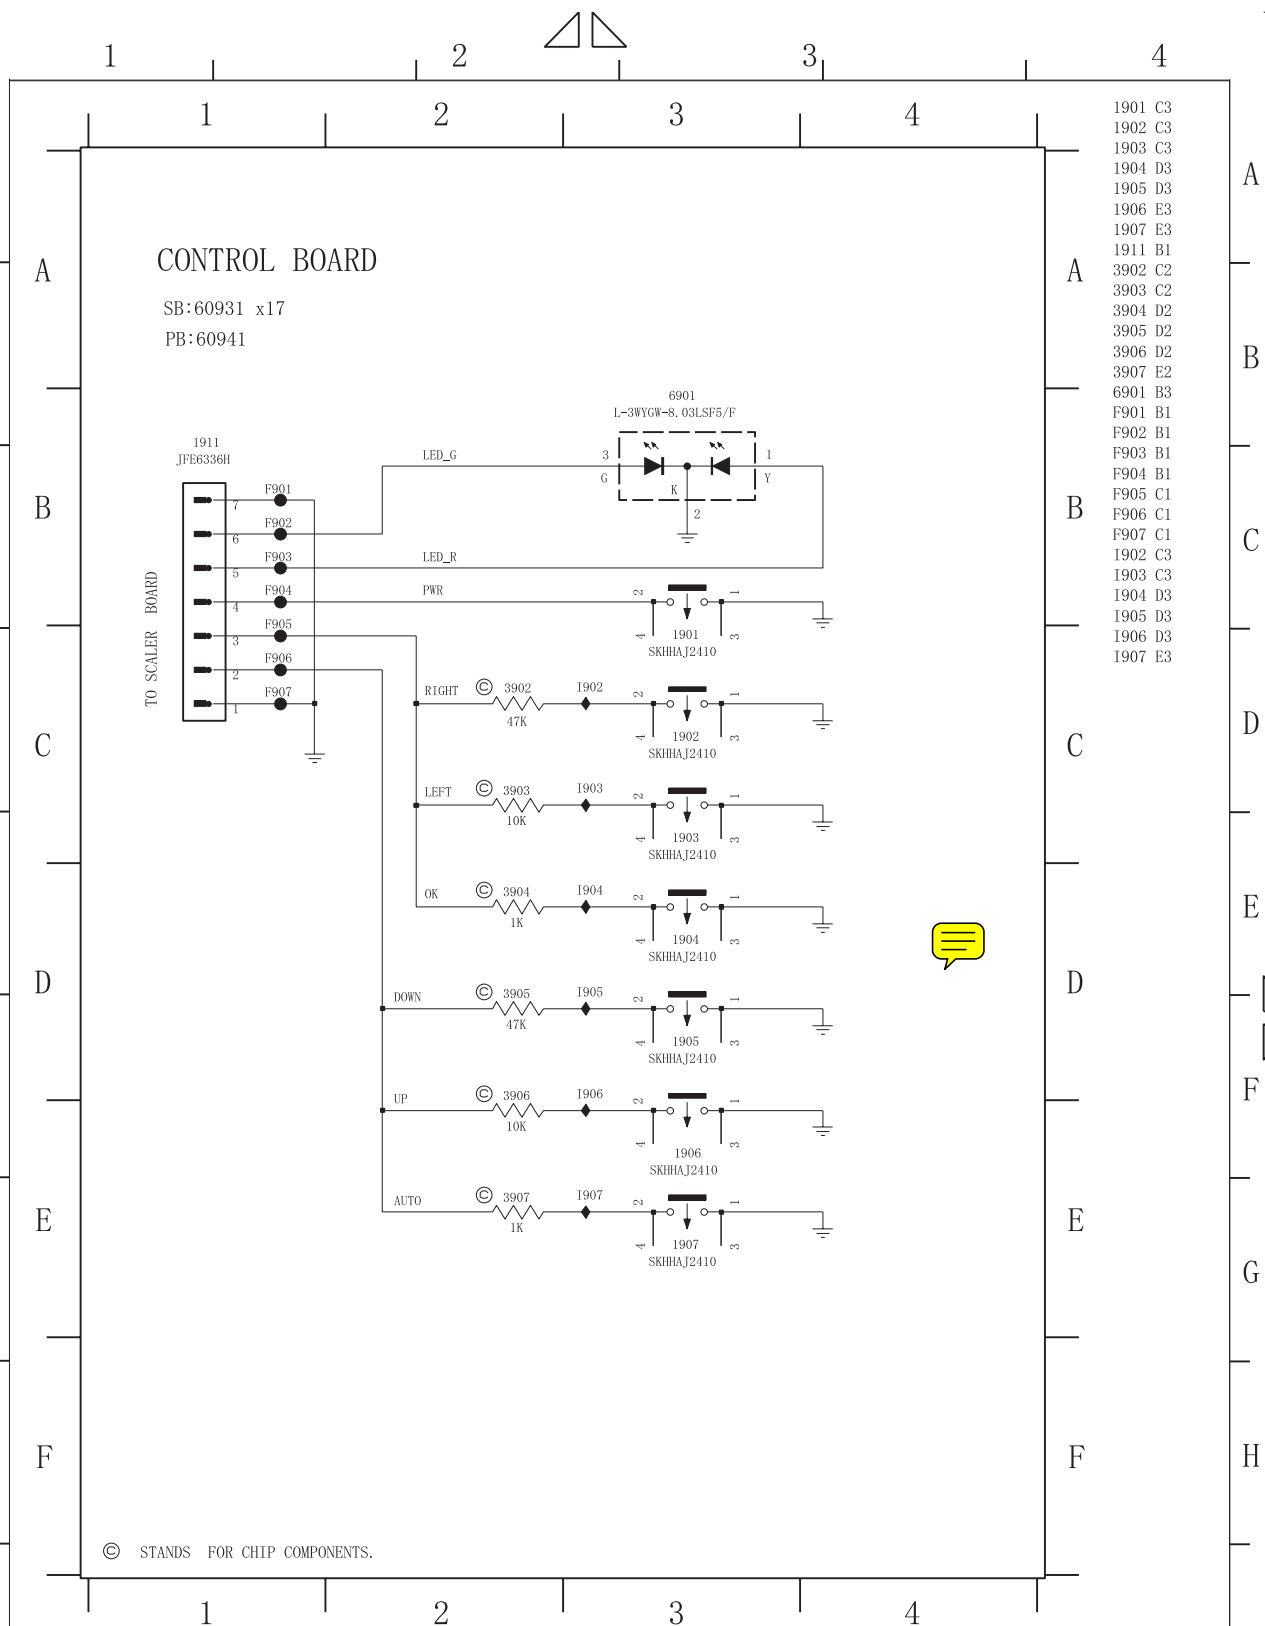

- 1901 C3
- 1902 C3
- 1903 C3
- 1904 D3
- 1905 D3
- 1906 E3
- 1907 E3
- 1911 B1
- 3902 C2
- 3903 C2
- 3904 D2
- 3905 D2
- 3906 D2
- 3907 E2
- 6901 B3
- F901 B1
- F902 B1
- F903 B1
- F904 B1
- F905 C1
- F906 C1
- F907 C1
- I902 C3
- I903 C3
- I904 D3
- I905 D3
- I906 D3
- I907 E3

CHN	ECO-	SETNAME	XH4 ( HUDSON4-150C5 )	
CLASS_30	CONTROL BOARD		1	
	150C5BS/00		3138 158 6008	
2004-05-28	3	NAME	Jerry Chen/Joss Hung	SUPERS.
		DATE	2004-05-28	1
		CHECK		130 -
		DATE	2004-05-28	1
			© KONINKLIJKE PHILIPS ELECTRONICS N.V. 2000	



PHILIPS

All rights reserved. Reproduction in whole or in parts is prohibited without the written consent of the copyright owner.


All rights reserved. Reproduction in whole or in parts is prohibited without the written consent of the copyright owner.




PHILIPS

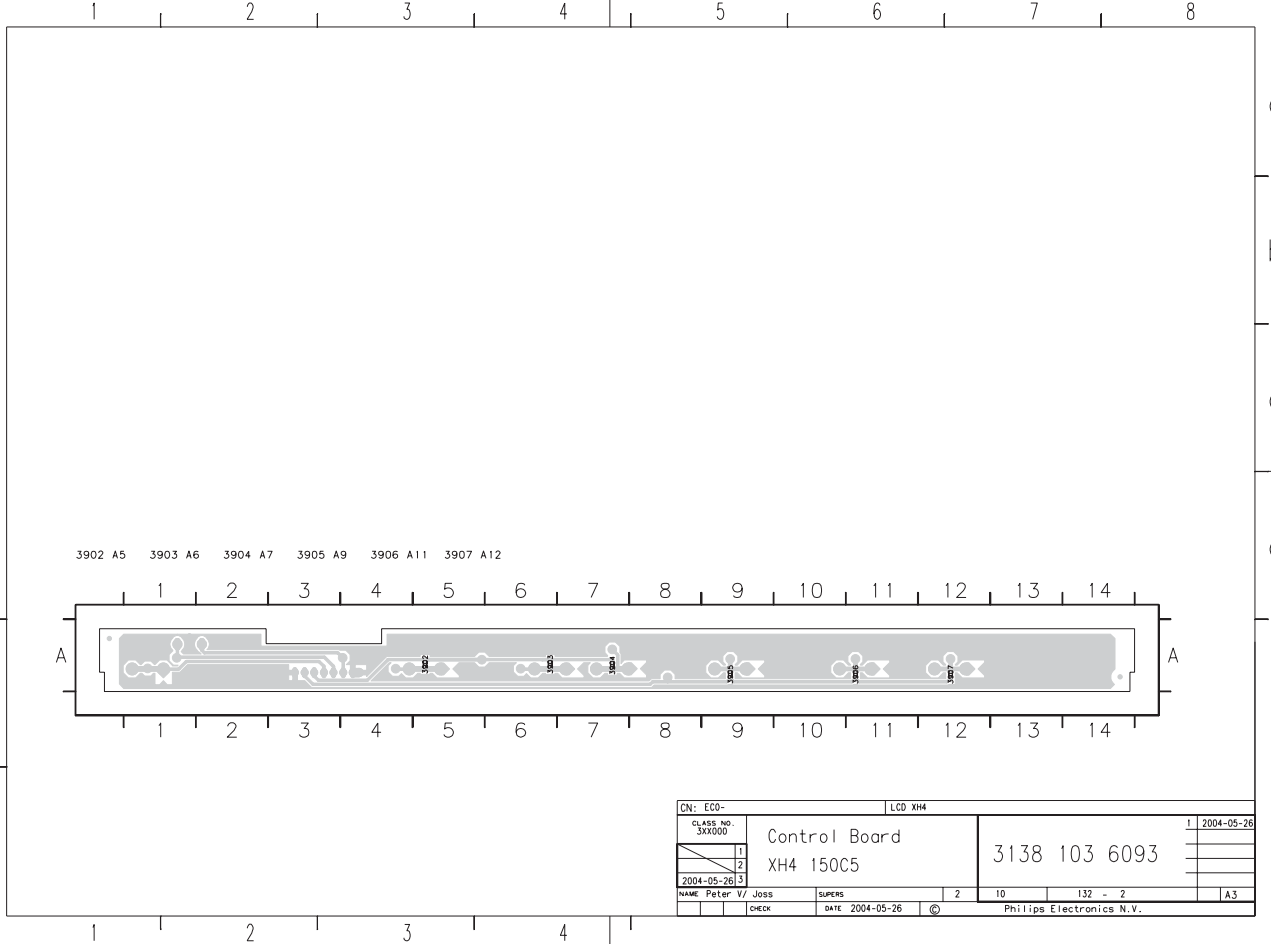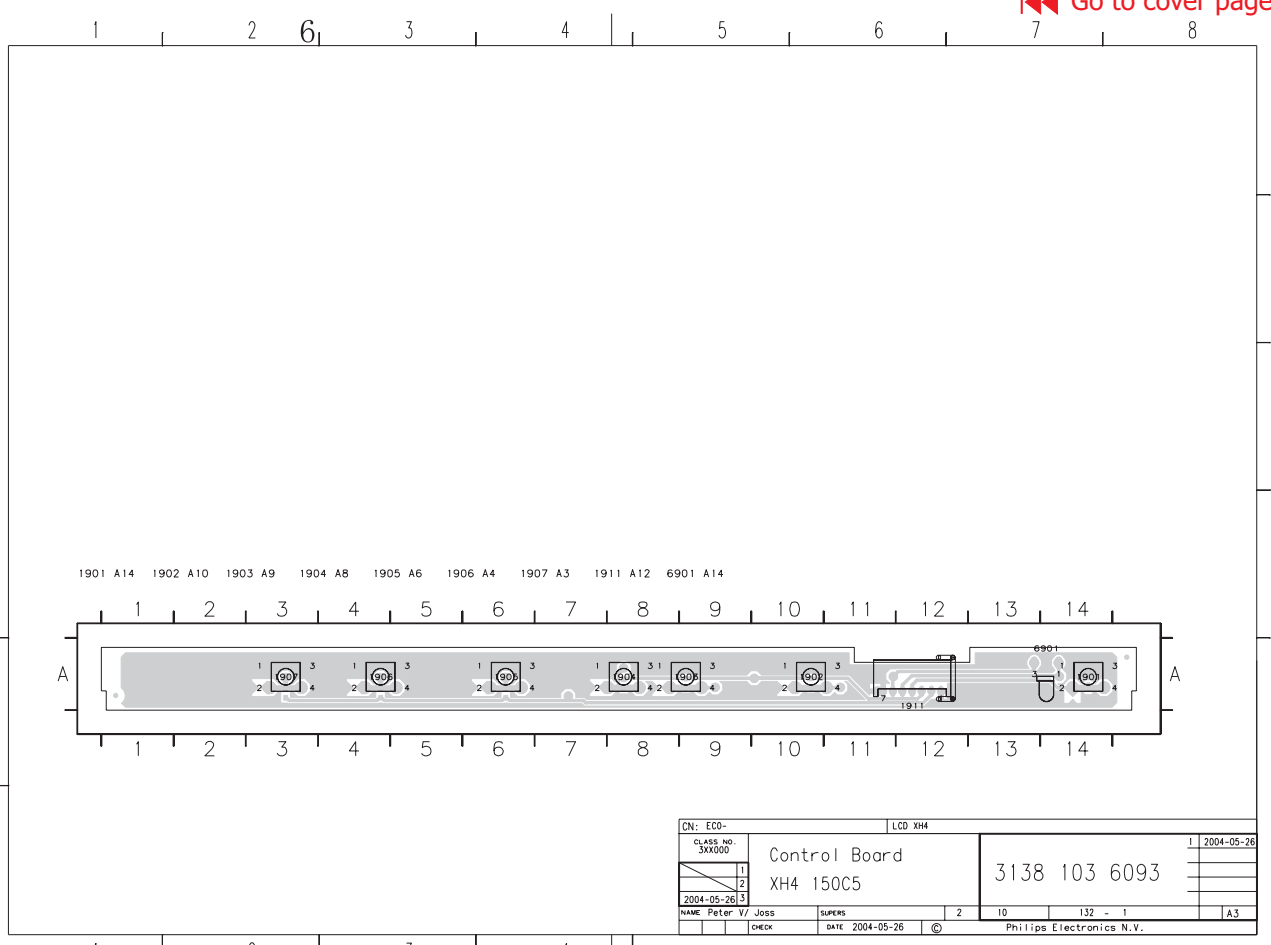

Power Schematic Diagram-1

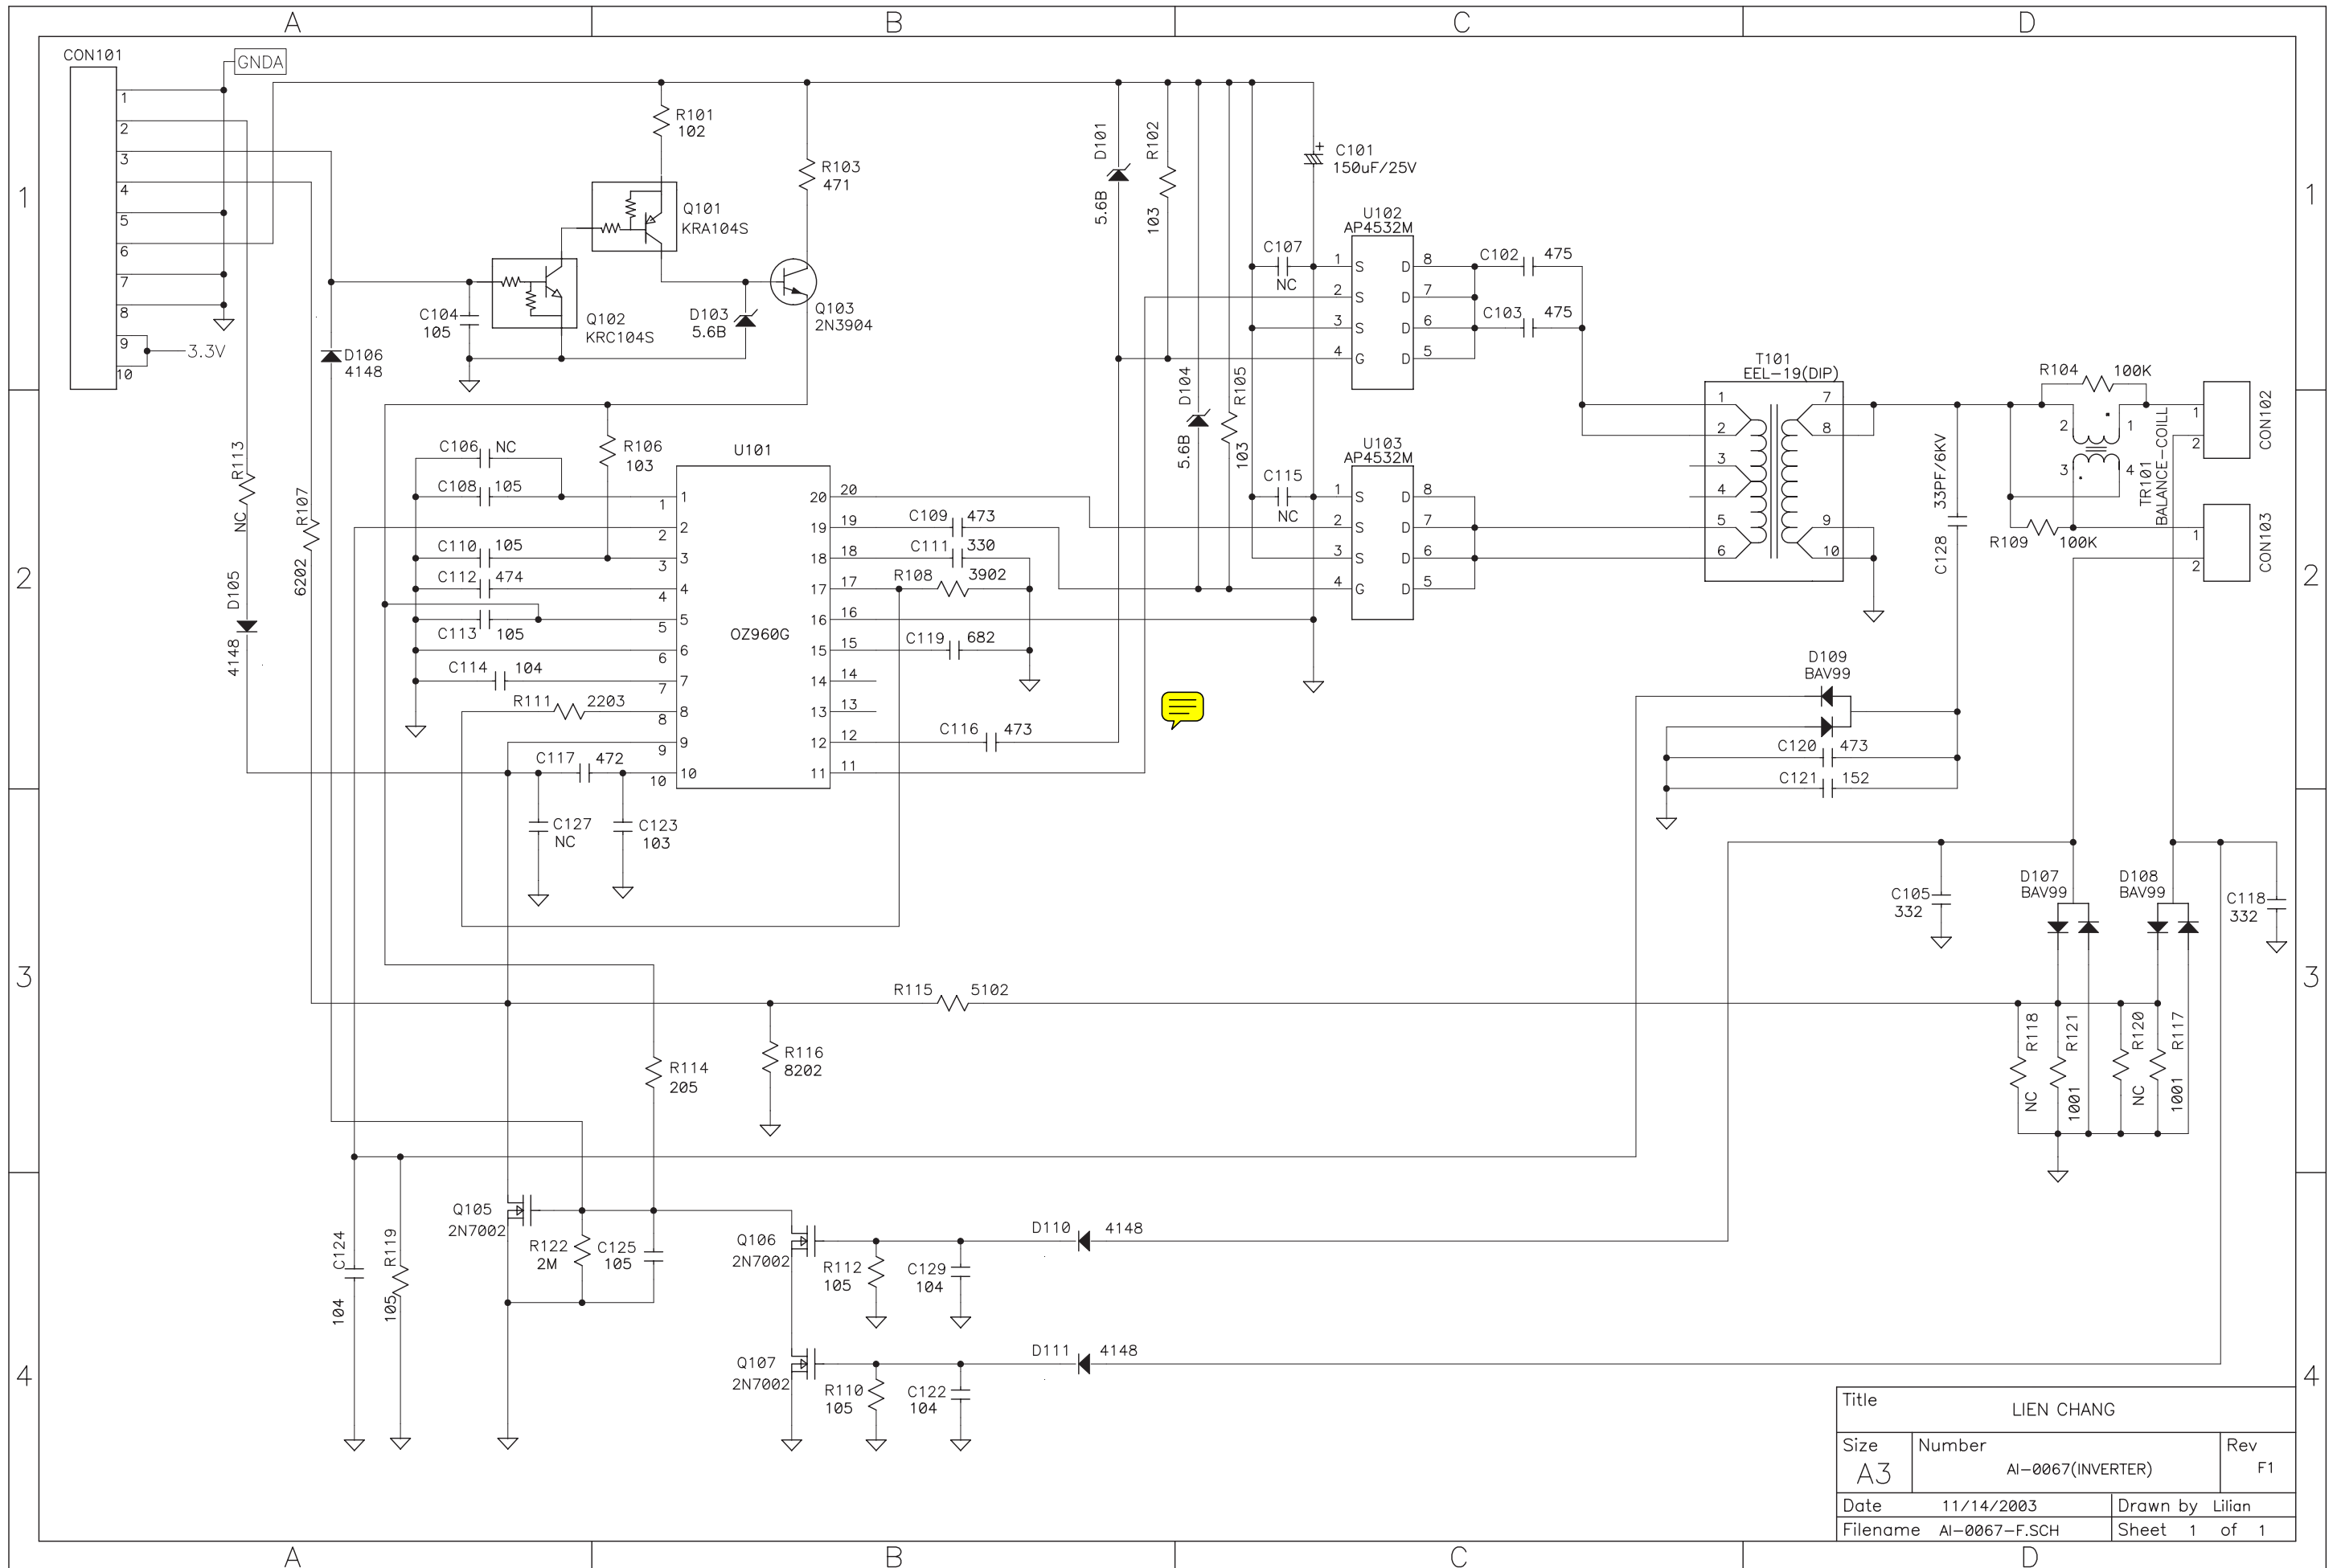


Title			LIEN CHANG		
Size	Number			Rev	
A3	AI-0067(INVERTER)			F1	
Date	11/14/2003	Drawn by		Lilian	
Filename	AI-0067-F.SCH	Sheet		1 of 1	

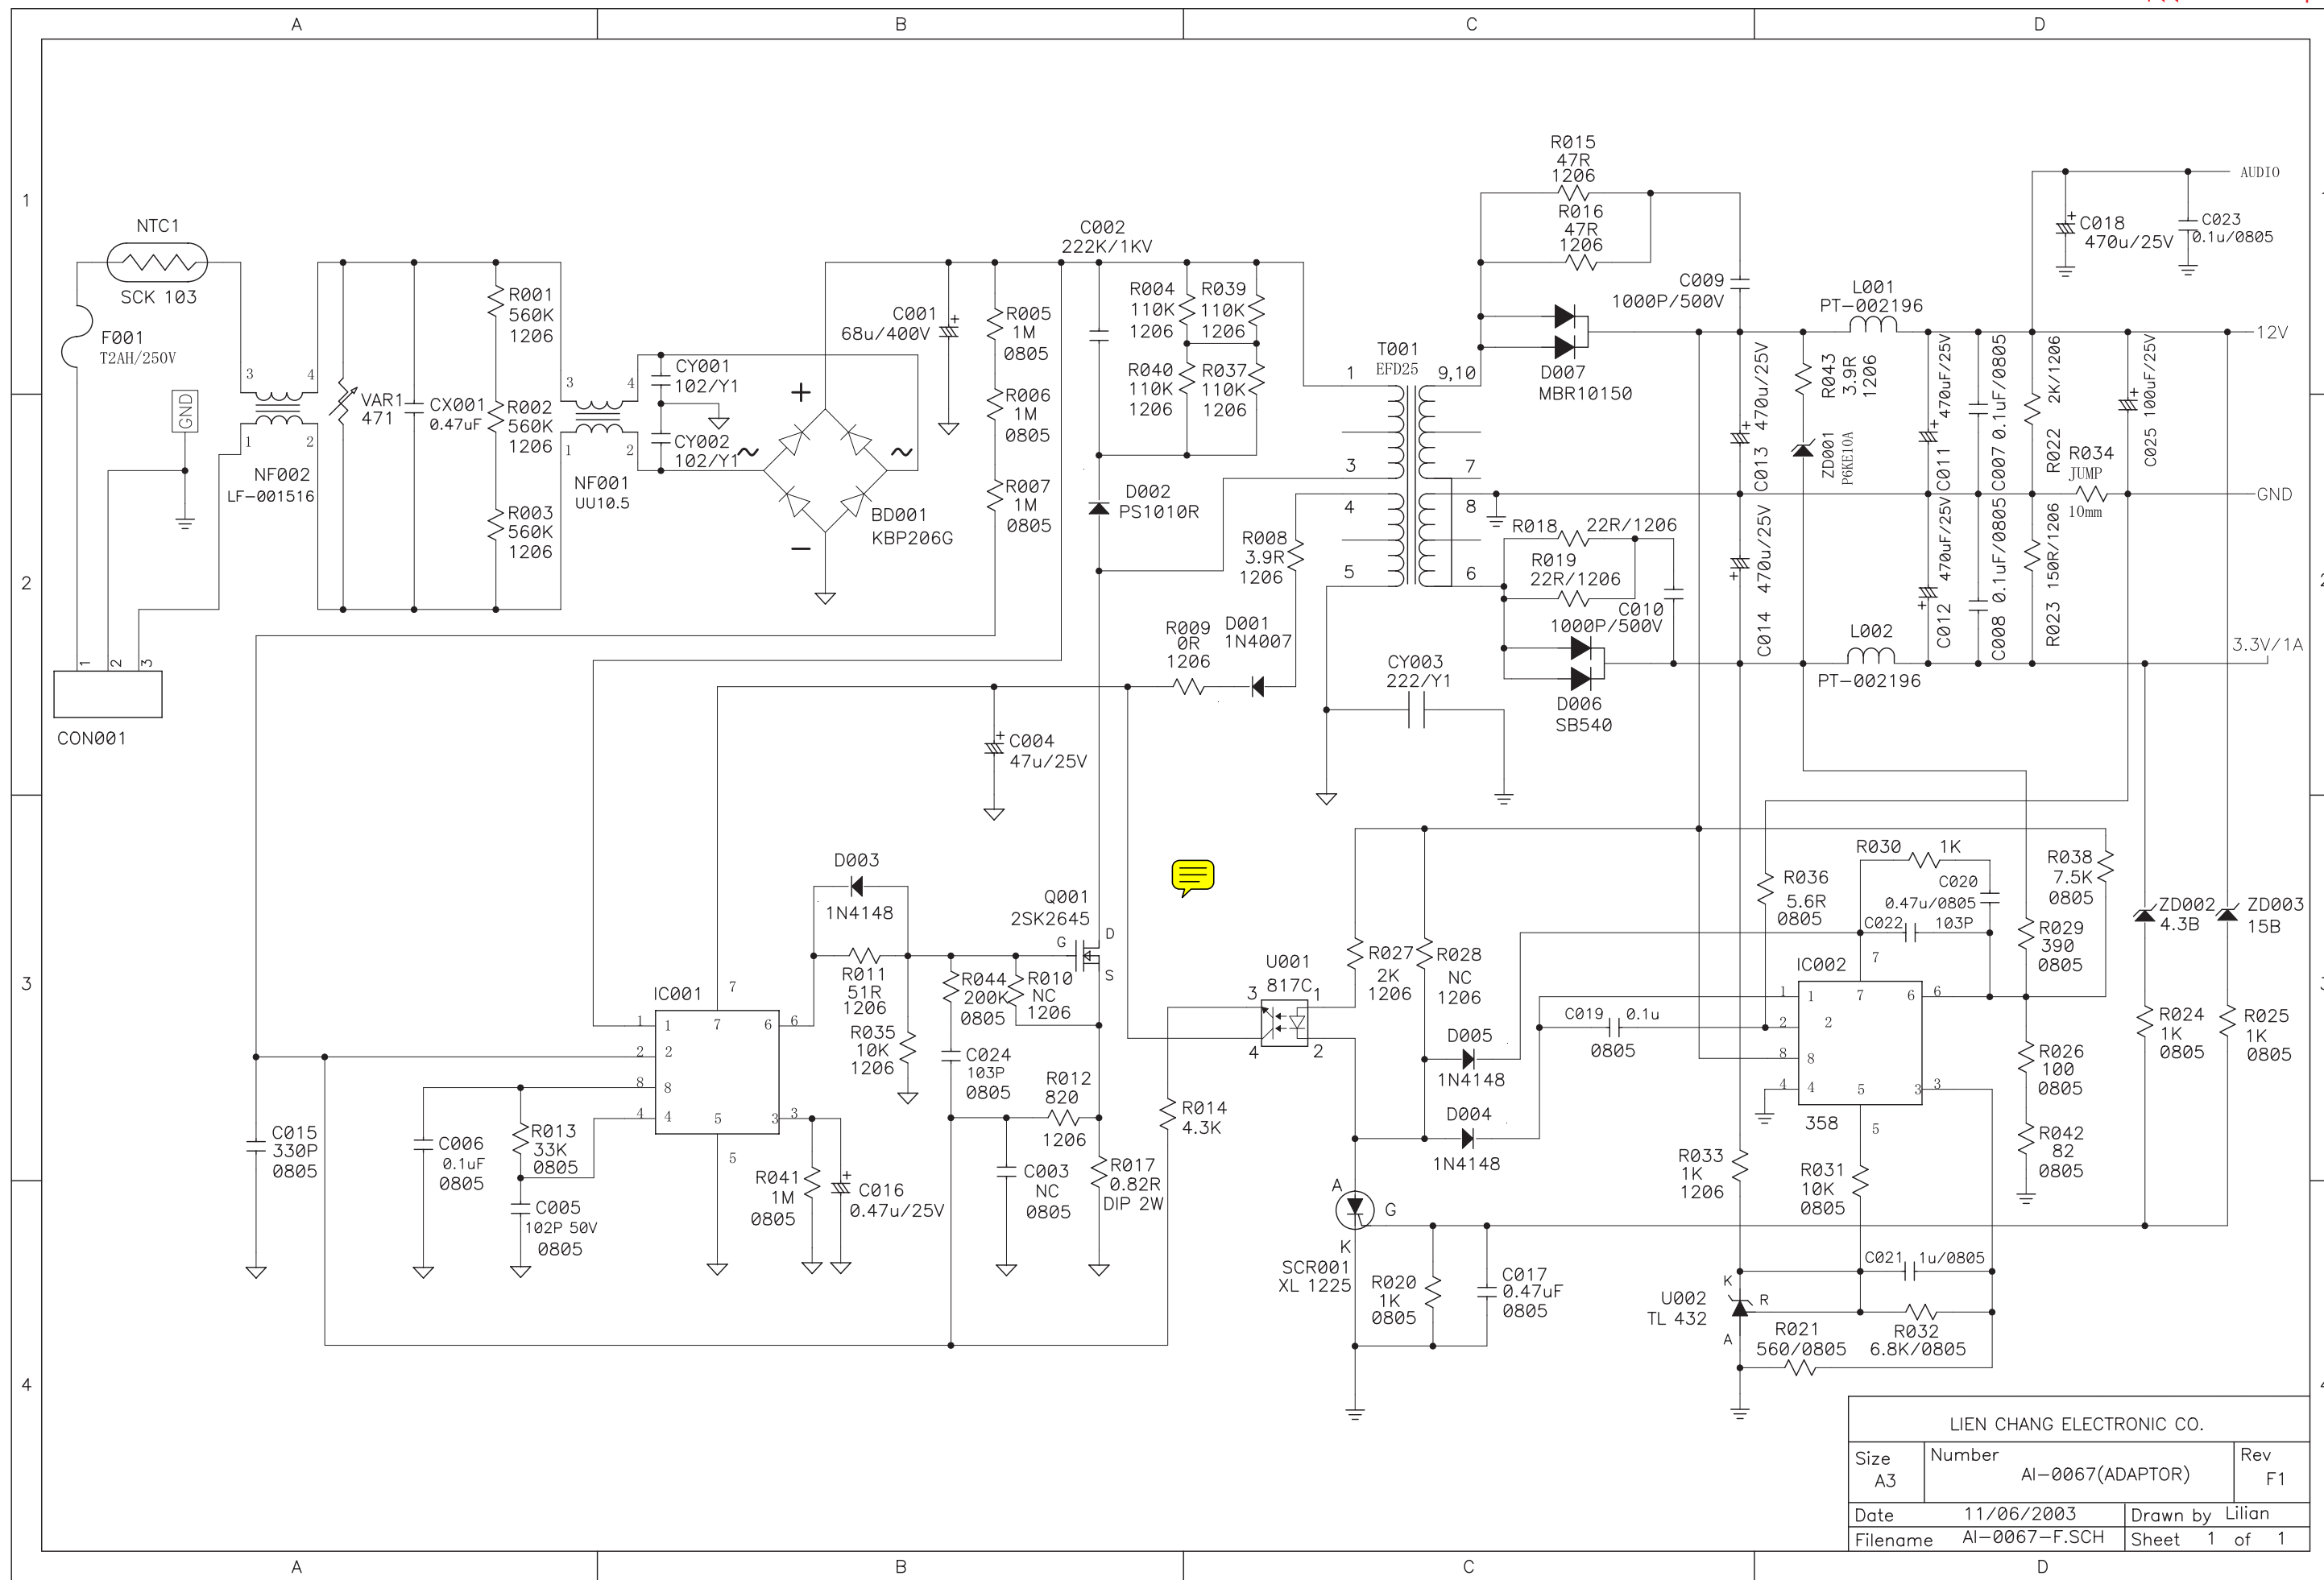

LIEN CHANG ELECTRONIC CO.		
Size A3	Number AI-0067(ADAPTOR)	Rev F1
Date 11/06/2003	Drawn by Lilian	
Filename AI-0067-F.SCH	Sheet 1 of 1	

# Exploded View

Go to cover page

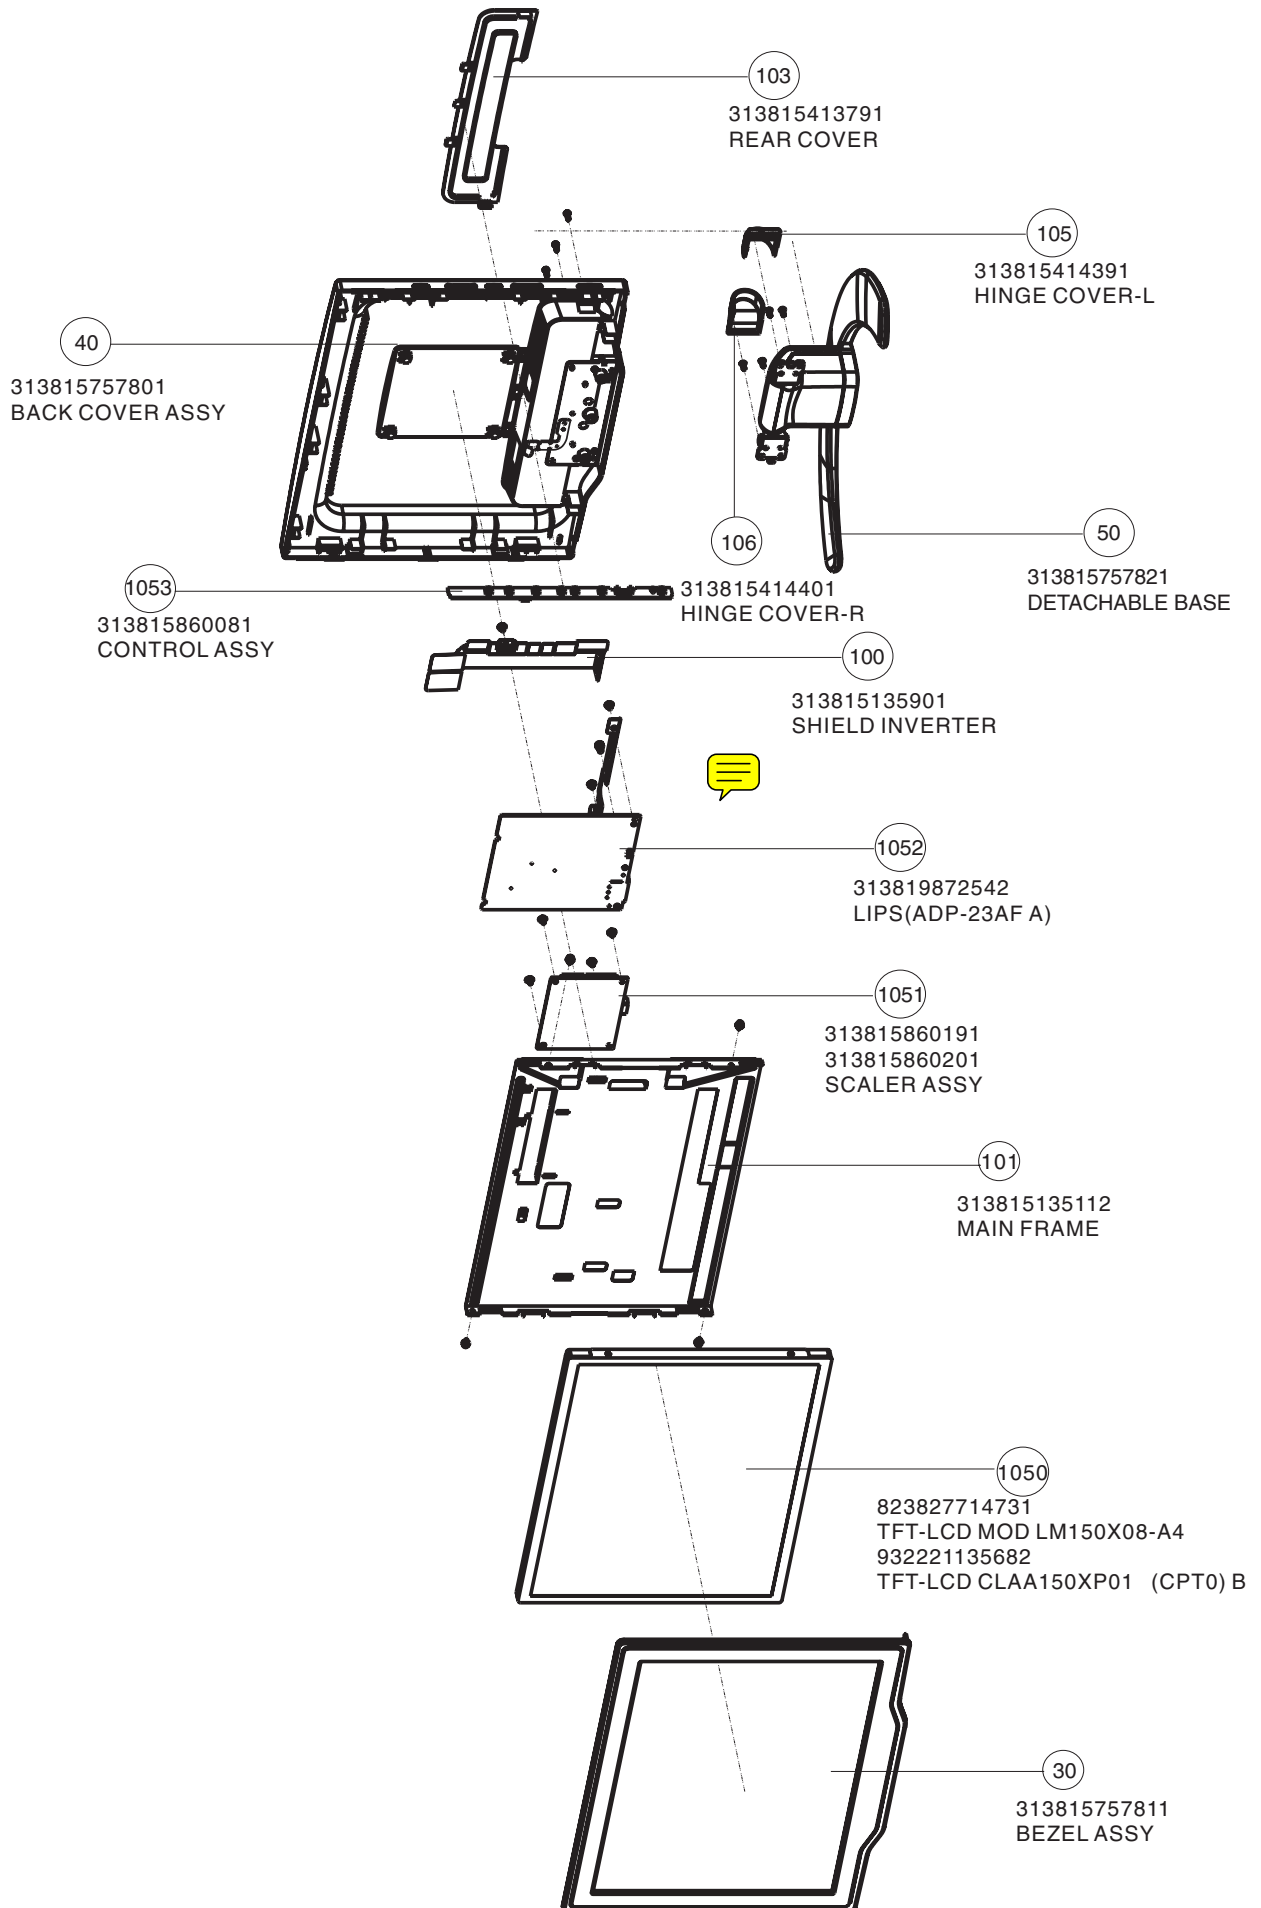



Model: 150C5BS/00 12NC:863900015512		PCB Assy		2532	223858615623	CER2 0603 X7R 50V	1N PM10 R				
Mechanical Parts		1051	313815860191	SCALER ASSY	2533	223858615623	CER2 0603 X7R 50V 1N PM10 R				
0030	313815757811	BEZEL ASSY	1051	313815860201	SCALER ASSY	2534	202001293747	ELCAP SM RV2 25V 47U PM20 R			
0031	313815413681	BEZEL	1304	243854300093	RES XTL SM 14M31818 7P SMD49 R	2536	202001293747	ELCAP SM RV2 25V 47U PM20 R			
0032	313815408971	LENS-POWER									
0040	313815757801	BACK COVER ASSY	2218	223886715339	CER1 0603 NP0 50V 33P PM5 R	3216	212211805643	RST SM 0603 RC0603 100R PM5 R			
0041	313815413671	BACK COVER	2219	223886715221	CER1 0603 NP0 50V 220P PM5 R	3217	212211805643	RST SM 0603 RC0603 100R PM5 R			
0042	313815413616	GROUNDING PLATE	2221	223878615649	CER2 0603 X7R 16V 100N PM10 R	3221	212211805674	RST SM 0603 RC0603 22K PM5 R			
0043	313815414381	BUTTON-CONTROL	2222	223858615636	CER2 0603 X7R 16V 100N PM10 R	3222	212211805674	RST SM 0603 RC0603 22K PM5 R			
0050	313815757821	DETACHABLE BASE	2225	223858615636	CER2 0603 X7R 50V 10N PM10 R	3223	212211805643	RST SM 0603 RC0603 100R PM5 R			
0096	313815408011	GUIDE DC OUT(BLK)	2227	223858615636	CER2 0603 X7R 50V 10N PM10 R	3224	212211805643	RST SM 0603 RC0603 100R PM5 R			
0100	313815135901	SHIELD INVERTER	2229	223858615636	CER2 0603 X7R 50V 10N PM10 R	3225	212211805643	RST SM 0603 RC0603 100R PM5 R			
0101	313815135112	MAIN FRAME	2233	223878615649	CER2 0603 X7R 16V 100N PM10 R	3226	212211805643	RST SM 0603 RC0603 100R PM5 R			
0103	313815413791	REAR COVER	2234	223878615649	CER2 0603 X7R 16V 100N PM10 R	3227	212211805661	RST SM 0603 RC0603 2K2 PM5 R			
0105	313815414391	HINGE COVER-L	2304	223878615649	CER2 0603 X7R 16V 100N PM10 R	3228	212211805661	RST SM 0603 RC0603 2K2 PM5 R			
0106	313815414401	HINGE COVER-R	2305	202001293721	ELCAP SM RV2 16V 10U PM20 R	3229	212211805678	RST SM 0603 RC0603 47K PM5 R			
0210	313800991811	PROCESS BOX	2306	223886715229	CER1 0603 NP0 50V 22P PM5 R	3230	212211805674	RST SM 0603 RC0603 22K PM5 R			
Packing Materials		2307	223886715229	CER1 0603 NP0 50V 22P PM5 R	2309	223878615649	CER2 0603 X7R 16V 100N PM10 R	3231	212211805635	RST SM 0603 RC0603 10R PM5 R	
0450	313815637931	CARTON	2313	223878615649	CER2 0603 X7R 16V 100N PM10 R	2401	223878615649	CER2 0603 X7R 16V 100N PM10 R	3232	212211805639	RST SM 0603 RC0603 47R PM5 R
0451	313815637921	CUSHION-R	2401	223878615649	CER2 0603 X7R 16V 100N PM10 R	2402	223878615649	CER2 0603 X7R 16V 100N PM10 R	3233	232273467509	RST SM 0805 RC12H 75R PM1 R
0452	313815637911	CUSHION-L	2402	223878615649	CER2 0603 X7R 16V 100N PM10 R	2403	223878615649	CER2 0603 X7R 16V 100N PM10 R	3234	212211805635	RST SM 0603 RC0603 10R PM5 R
0453	313815621481	P.E.BAG	2403	223878615649	CER2 0603 X7R 16V 100N PM10 R	2408	223878615649	CER2 0603 X7R 16V 100N PM10 R	3235	232273467509	RST SM 0805 RC12H 75R PM1 R
PCB Assy		2409	223878615649	CER2 0603 X7R 16V 100N PM10 R	2414	223858615636	CER2 0603 X7R 50V 10N PM10 R	3236	212211805639	RST SM 0603 RC0603 47R PM5 R	
1051	313815860191	SCALER ASSY	2415	223858615636	CER2 0603 X7R 50V 10N PM10 R	2416	223858615636	CER2 0603 X7R 50V 10N PM10 R	3237	232273467509	RST SM 0805 RC12H 75R PM1 R
1051	313815860201	SCALER ASSY	2417	223878615649	CER2 0603 X7R 16V 100N PM10 R	2417	223878615649	CER2 0603 X7R 16V 100N PM10 R	3238	212211805665	RST SM 0603 RC0603 4K7 PM5 R
1052	313819872542	LIPS(ADP-23AF A)	2442	223878615649	CER2 0603 X7R 16V 100N PM10 R	2443	223878615649	CER2 0603 X7R 16V 100N PM10 R	3239	212211805669	RST SM 0603 RC0603 10K PM5 R
1053	313815860081	CONTROL ASSY	2443	223878615649	CER2 0603 X7R 16V 100N PM10 R	2444	223878615649	CER2 0603 X7R 16V 100N PM10 R	3241	212211805669	RST SM 0603 RC0603 10K PM5 R
Accessory		2445	202001293721	ELCAP SM RV2 16V 10U PM20 R	2446	202001293721	ELCAP SM RV2 16V 10U PM20 R	3242	212211805656	RST SM 0603 RC0603 1K PM5 R	
0602	313811707271	E-D.F.U.	2448	223878615649	CER2 0603 X7R 16V 100N PM10 R	2449	223878615649	CER2 0603 X7R 16V 100N PM10 R	3243	212211805631	RST SM 0603 JUMP. MAX 0R05 R
1157	313818878471	MAINSCORD IEC 10A 1M83 DET GY	2449	223878615649	CER2 0603 X7R 16V 100N PM10 R	2450	223878615649	CER2 0603 X7R 16V 100N PM10 R	3244	212211805631	RST SM 0603 JUMP. MAX 0R05 R
1158	313819871191	CORD SUB-D 15/1M8/SUB-D 15GY	2450	223878615649	CER2 0603 X7R 16V 100N PM10 R	2451	223878615649	CER2 0603 X7R 16V 100N PM10 R	3245	212211805631	RST SM 0603 JUMP. MAX 0R05 R
LCD Panel		2452	223878615649	CER2 0603 X7R 16V 100N PM10 R	2453	223878615649	CER2 0603 X7R 16V 100N PM10 R	3302	212211805669	RST SM 0603 RC0603 10K PM5 R	
1050	823827714731	TFT-LCD MOD LM150X08-A4	2453	223878615649	CER2 0603 X7R 16V 100N PM10 R	2454	223878615649	CER2 0603 X7R 16V 100N PM10 R	3303	212211805669	RST SM 0603 RC0603 10K PM5 R
1050	932221135682	TFT-LCD CLAA150XP01 (CPT0) B	2454	223878615649	CER2 0603 X7R 16V 100N PM10 R	2455	223878615649	CER2 0603 X7R 16V 100N PM10 R	3304	212211805669	RST SM 0603 RC0603 10K PM5 R
Miscellanea		2455	223878615649	CER2 0603 X7R 16V 100N PM10 R	2457	223878615649	CER2 0603 X7R 16V 100N PM10 R	3305	212211805669	RST SM 0603 RC0603 10K PM5 R	
0291	313815564341	LABEL-CPU	2457	223878615649	CER2 0603 X7R 16V 100N PM10 R	2458	223878615649	CER2 0603 X7R 16V 100N PM10 R	3306	212211805665	RST SM 0603 RC0603 4K7 PM5 R
0295	313815564351	LABEL-EEPROM(L)	2458	223878615649	CER2 0603 X7R 16V 100N PM10 R	2459	223878615649	CER2 0603 X7R 16V 100N PM10 R	3307	212211805665	RST SM 0603 RC0603 4K7 PM5 R
0295	313815564361	LABEL-EEPROM(C)	2460	222224119876	CER2 1206 Y5V 10V 10U P8020 R	2460	222224119876	CER2 1206 Y5V 10V 10U P8020 R	3308	212211805643	RST SM 0603 RC0603 100R PM5 R
0615	313811707321	HEX CODE OF F/W	2463	222224119876	CER2 1206 Y5V 10V 10U P8020 R	2464	223878615649	CER2 0603 X7R 16V 100N PM10 R	3309	212211805643	RST SM 0603 RC0603 100R PM5 R
4444	313810610405	CD ROM - SERVICE MANUAL	2465	223878615649	CER2 0603 X7R 16V 100N PM10 R	2465	223878615649	CER2 0603 X7R 16V 100N PM10 R	3311	212211805689	RST SM 0603 RC0603 1M PM5 R
4444	313810610406	SERVICE MANUAL	2466	223878615649	CER2 0603 X7R 16V 100N PM10 R	2466	223878615649	CER2 0603 X7R 16V 100N PM10 R	3312	212211805631	RST SM 0603 JUMP. MAX 0R05 R
8161	313819873091	CBLE -017 7/260/7-017 AWG28	2468	222224119876	CER2 1206 Y5V 10V 10U P8020 R	2468	222224119876	CER2 1206 Y5V 10V 10U P8020 R	3313	212211805643	RST SM 0603 RC0603 100R PM5 R
8163	313819871221	CBLE-104 20/85/20-032 AWG28	2469	223878615649	CER2 0603 X7R 16V 100N PM10 R	2477	202001293721	ELCAP SM RV2 16V 10U PM20 R	3314	212211805669	RST SM 0603 RC0603 10K PM5 R
			2477	202001293721	ELCAP SM RV2 16V 10U PM20 R	2482	222224119876	CER2 1206 Y5V 10V 10U P8020 R	3319	212211805669	RST SM 0603 RC0603 10K PM5 R
			2482	222224119876	CER2 1206 Y5V 10V 10U P8020 R	2483	222224119876	CER2 1206 Y5V 10V 10U P8020 R	3320	232270462009	RST SM 0603 RC22H 20R PM1 R
			2501	223878615649	CER2 0603 X7R 16V 100N PM10 R	2501	223878615649	CER2 0603 X7R 16V 100N PM10 R	3321	212211805689	RST SM 0603 RC0603 1M PM5 R
			2502	223878615649	CER2 0603 X7R 16V 100N PM10 R	2502	223878615649	CER2 0603 X7R 16V 100N PM10 R	3322	212211805631	RST SM 0603 JUMP. MAX 0R05 R
			2505	223878615649	CER2 0603 X7R 16V 100N PM10 R	2505	223878615649	CER2 0603 X7R 16V 100N PM10 R	3325	212211805665	RST SM 0603 RC0603 4K7 PM5 R
			2506	223878615649	CER2 0603 X7R 16V 100N PM10 R	2506	223878615649	CER2 0603 X7R 16V 100N PM10 R	3326	212211805665	RST SM 0603 RC0603 4K7 PM5 R
			2509	223858615636	CER2 0603 X7R 50V 10N PM10 R	2509	223858615636	CER2 0603 X7R 50V 10N PM10 R	3327	212211805643	RST SM 0603 RC0603 100R PM5 R
			2516	223858615623	CER2 0603 X7R 50V 1N PM10 R	2516	223858615623	CER2 0603 X7R 50V 1N PM10 R	3328	212211805643	RST SM 0603 RC0603 100R PM5 R
			2518	223858615623	CER2 0603 X7R 50V 1N PM10 R	2518	223858615623	CER2 0603 X7R 50V 1N PM10 R	3329	212211805643	RST SM 0603 RC0603 100R PM5 R
			2522	223858615623	CER2 0603 X7R 50V 1N PM10 R	2522	223858615623	CER2 0603 X7R 50V 1N PM10 R	3330	212211805643	RST SM 0603 RC0603 100R PM5 R
			2524	223858615623	CER2 0603 X7R 50V 1N PM10 R	2524	223858615623	CER2 0603 X7R 50V 1N PM10 R	3331	212211805631	RST SM 0603 JUMP. MAX 0R05 R
			2530	223858615623	CER2 0603 X7R 50V 1N PM10 R	2530	223858615623	CER2 0603 X7R 50V 1N PM10 R	3332	212211805643	RST SM 0603 RC0603 100R PM5 R
									3333	212211805631	RST SM 0603 JUMP. MAX 0R05 R
									3334	212211805643	RST SM 0603 RC0603 100R PM5 R
									3335	212211805643	RST SM 0603 RC0603 100R PM5 R
									3336	212211805643	RST SM 0603 RC0603 100R PM5 R
									3337	212211805643	RST SM 0603 RC0603 100R PM5 R
									3338	212211805643	RST SM 0603 RC0603 100R PM5 R
									3339	212211805643	RST SM 0603 RC0603 100R PM5 R
									3340	212211805643	RST SM 0603 RC0603 100R PM5 R
									3341	212211805669	RST SM 0603 RC0603 10K PM5 R
									3342	212211805643	RST SM 0603 RC0603 100R PM5 R
									3343	212211805643	RST SM 0603 RC0603 100R PM5 R
									3344	212211805643	RST SM 0603 RC0603 100R PM5 R
									3345	212211805643	RST SM 0603 RC0603 100R PM5 R
									3346	212211805643	RST SM 0603 RC0603 100R PM5 R



Go to cover page

3347 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3348 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3349 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3350 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3351 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3352 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3353 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3401 212211805644 RST SM 0603 RC0603 120R PM5 R  
 3402 212211805644 RST SM 0603 RC0603 120R PM5 R  
 3403 212211805644 RST SM 0603 RC0603 120R PM5 R  
 3404 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3405 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3408 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3409 212211805639 RST SM 0603 RC0603 47R PM5 R  
 3410 212211805689 RST SM 0603 RC0603 1M PM5 R  
 3501 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3502 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3504 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3505 212211805643 RST SM 0603 RC0603 100R PM5 R  
 3506 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3507 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3508 212211805647 RST SM 0603 RC0603 220R PM5 R  
 3509 212211805647 RST SM 0603 RC0603 220R PM5 R  
 3510 212211805656 RST SM 0603 RC0603 1K PM5 R  
 3512 212211805678 RST SM 0603 RC0603 47K PM5 R  
 3527 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3528 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3532 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3533 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3537 212211805678 RST SM 0603 RC0603 47K PM5 R



5202 313816874261 TI321611G800-SMD  
 5302 313816874261 TI321611G800-SMD  
 5440 313816874261 TI321611G800-SMD  
 5441 313816874261 TI321611G800-SMD  
 5444 313816874261 TI321611G800-SMD  
 5445 313816874261 TI321611G800-SMD  
 5446 313816874261 TI321611G800-SMD  
 5449 313816874261 TI321611G800-SMD  
 5501 313816874261 TI321611G800-SMD  
 5503 313816874261 TI321611G800-SMD  
 5504 242254944196 IND FXD 0805 EMI 100MHZ 120R R  
 5505 242254944196 IND FXD 0805 EMI 100MHZ 120R R  
 5506 242254944196 IND FXD 0805 EMI 100MHZ 120R R



6220 932217973668 DIO REC SM BAT42W (PAJI) R  
 6221 933913910115 DIO SIG SM BAS32L (PHSE) R



7202 932214526668 IC SM M24C02-WMN6 (ST00) R  
 7301 932220582682 IC SM NT68F633L (NOVA) L  
 7302 932214725682 IC M24C16-WBN6 (ST00) L  
 7442 932220099685 IC SM LD1117AS18 (ST00) R  
 7443 932220859671 IC SM GMZAN3L-AD (GEMI) Y  
 7501 932200429685 TRA SIG SM BC857C (ONSE) R  
 7502 932200429685 TRA SIG SM BC857C (ONSE) R  
 7505 932209265685 TRA SIG SM MUN2211J (ONSE) R  
 7506 932216638668 FET POW SM SI5441DC (VISH) R

PCB Assy  
 1053 313815860081 CONTROL ASSY  
 1901 243812900043 SWI TACT H=4.3 BK 100G SKHH B  
 1902 243812900043 SWI TACT H=4.3 BK 100G SKHH B  
 1903 243812900043 SWI TACT H=4.3 BK 100G SKHH B  
 1904 243812900043 SWI TACT H=4.3 BK 100G SKHH B  
 1905 243812900043 SWI TACT H=4.3 BK 100G SKHH B  
 1906 243812900043 SWI TACT H=4.3 BK 100G SKHH B  
 1907 243812900043 SWI TACT H=4.3 BK 100G SKHH B



3902 212211805678 RST SM 0603 RC0603 47K PM5 R  
 3903 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3904 212211805656 RST SM 0603 RC0603 1K PM5 R  
 3905 212211805678 RST SM 0603 RC0603 47K PM5 R  
 3906 212211805669 RST SM 0603 RC0603 10K PM5 R  
 3907 212211805656 RST SM 0603 RC0603 1K PM5 R



6901 932219981682 LED VS L-3WYGW-8.03\* (KIEL) B

Model:150C5BS/00 12NC:863900015512

0030	313815757811	BEZEL ASSY
0031	313815413681	BEZEL
0032	313815408971	LENS-POWER
0040	313815757801	BACK COVER ASSY
0050	313815757821	DETACHABLE BASE
0096	313815408011	GUIDE DC OUT(BLK)
0100	313815135901	SHIELD INVERTER
0101	313815135112	MAIN FRAME
0103	313815413791	REAR COVER
0105	313815414391	HINGE COVER-L
0106	313815414401	HINGE COVER-R
0210	313800991811	PROCESS BOX
0291	313815564341	LABEL-CPU
0295	313815564351	LABEL-EEPROM(L)
0295	313815564361	LABEL-EEPROM(C)
0450	313815637931	CARTON
0451	313815637921	CUSHION-R
0452	313815637911	CUSHION-L
0453	313815621481	P.E.BAG
0602	313811707271	E-D.F.U.
0615	313811707321	HEX CODE OF F/W
1157	313818878471	MAINSCORD IEC 10A 1M83 DET GY
1158	313819871191	CORD SUB-D 15/1M8/SUB-D 15GY
6220	932217973668	DIO REC SM BAT42W (PAJI) R
6221	933913910115	DIO SIG SM BAS32L (PHSE) R
6901	932219981682	LED VS L-3WYGW-8.03* (KIEL) B
7202	932214526668	IC SM M24C02-WMN6 (ST00) R
7301	932220582682	IC SM NT68F633L (NOVA) L
7302	932214725682	IC M24C16-WBN6 (ST00) L
7442	932220099685	IC SM LD1117AS18 (ST00) R
7443	932220859671	IC SM GMZAN3L-AD (GEMI) Y
7501	932200429685	TRA SIG SM BC857C (ONSE) R
7505	932209265685	TRA SIG SM MUN2211J (ONSE) R
7506	932216638668	FET POW SM SI5441DC (VISH) R
8161	313819873091	CBLE -017 7/260/7-017 AWG28
8163	313819871221	CBLE-104 20/85/20-032 AWG28

Go to cover page


Quick reference for failure mode of LCD panel

this page presents problems that could be made by LCD panel. It is not necessary to repair circuit board. Simply follow the mechanical instruction on this manual to eliminate failure by replace LCD panel.

Failure description

Phenomenon


Vertical block defect



Polarizer has bubbles




Vertical dim lines



Polarizer has bubbles



Vertical lines defect (Always bright or dark)



Foreign material inside polarizer. It shows liner or dot shape.




Horizontal block defect



Concentric circle formed




Horizontal dim lines




Bottom back light of LCD is brighter than normal



Horizontal lines defect (Always bright or dark)



Back light un-uniformity



Has bright or dark pixel



Backlight has foreign material. Black or white color, liner or circular type



**PHILIPS**



PHILIPS - 150C5  
 GENERAL PRODUCT  
 SPECIFICATION

- . ANALOG SIGNAL INPUT
- . AUTO PICTURE ADJUSTMENT
- . 14 FACTORY PRESET MODES AND 15 USER MODES WHICH CAN BE RECOVERED TO PRESET MODES
- . USER FRIENDLY OSD DISPLAY FOR MODE IDENTIFICATION /ADJUSTMENT
- . DDC2B COMMUNICATION CAPABILITY
- . MAX. RESOLUTION 1024 x 768 NON-INTERLACED AT 75 HZ
- . 15 " COLOR TFT LCD FLAT PANEL
- . EASY TILT & DETACHABLE BASE
- . FULL RANGE POWER SUPPLY 90 -264 VAC
- . CE ENVIRONMENTAL POLICY
- . ANTI-GLARE TO REDUCE LIGHT REFLECTION
- . POWER MANAGEMENT CAPABILITY
- . TCO 99, TCO 2003
- . PROTECTIVE COVER (Option)

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.		15" TFT XGALCD CMTR TYPE: 150C5BS/00 BRAND: PHILIPS		8639 000 15512	
2004-05-27					
NAME Jerry Chen/ Peter V	SUPERS.	22	590	1	10
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		

PHILIPS



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CONTENTS

- 1.0 Foreword
- 2.0 Product profile
  - 2.1 LCD
  - 2.2 Scanning frequencies
  - 2.3 Video dot rate
  - 2.4 Power input
  - 2.5 Power consumption
  - 2.6 Dimensions
  - 2.7 Weight
  - 2.8 Functions
  - 2.9 Ambient temperature
  - 2.10 Safety and EMI requirements
- 3.0 Electrical characteristics
  - 3.1 Interface signals
    - 3.1.1 Video
    - 3.1.2 Interface cable
    - 3.1.3 Software control functions via OSD/control
  - 3.2 OSD function control
  - 3.3 Timing requirement
    - 3.3.1 Mode storing capacity
    - 3.3.2 Factory preset timings
    - 3.3.3 Horizontal scanning
    - 3.3.4 Vertical scanning
  - 3.4 Power input connection
  - 3.5 Power management
  - 3.6 Display identification
- 4.0 Visual characteristics
  - 4.1 Test conditions
  - 4.2 Resolution
  - 4.3 Brightness
  - 4.4 Image size
    - 4.4.1 Actual display size
  - 4.5 Brightness uniformity
  - 4.6 White color adjustment
  - 4.7 Monitors pixel defect

CLASS NO.

15" TFT XGA LCD CMTR  
TYPE: 150C5BS/00  
BRAND: PHILIPS

8639 000 15512

2004-05-27

NAME Jerry Chen/ Peter V

SUPERS.

22

590

—

2

10

A4

TY

CHECK

DATE

2004-05-27

Property of

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.

**PHILIPS**



- 5.0 Mechanical characteristics
  - 5.1 Controls
  - 5.2 Unit dimension / weight
  - 5.3 Tilt and swivel base
  - 5.4 Transportation packages
    - 5.4.1 Shipping dimension / weight
    - 5.4.2 Block unit / palletization
- 6.0 Environmental characteristics
  - 6.1 Susceptibility of display to external environment
  - 6.2 Transportation tests
  - 6.3 Display disturbances from external environment
  - 6.4 Display disturbances to external environment
    - 6.4.1 EMI
- 7.0 Reliability
  - 7.1 Mean time between failures
- 8.0 Quality assurance requirements
  - 8.1 Acceptance test
- 9.0 Serviceability

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.		15" TFT XGALCD CMTR TYPE: 150C5BS/00 BRAND: PHILIPS		8639 000 15512			
2004-05-27							
NAME Jerry Chen/ Peter V	SUPERS.	22	590	—	3	10	A4
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.				





All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

1.0 FOREWORD  
This specification describes a 15 " XGA multi-scan color TFT LCD monitor with maximum resolution up to 1024x768/75Hz non-interlaced.

2.0 PRODUCT PROFILE  
HUDSON 15 " TFT LCD flat panel monitor  
Analog interface  
Integrated tilt and Detachable base

2.1 LCD

Type NR. : LG panel LM150\*08  
Outline Dimensions : 326.5(H) \* 253.5(V) \*11.2(D)mm  
Pitch (mm) : 0.297 x 0.297 mm  
Color pixel arrangement : RGB stripe arrangement  
Display surface : Anti-glare with hard coating(3H)  
Number of color : 6 bits with FRC, 16M colors  
Backlight : CCFL edge-light system  
Active area (W x H) : 304.1x228.1mm(15.0 " diagonal)  
Viewing angle (CR ≥ 10) : Vertical 100 degree, Horizontal 130 degree typical.  
Contrast ratio : 400 typical.  
Luminance of white : 250 Nits typical

Type NR. : CPT panel CLAA150XP01  
Dimensions : 326.5(H)\*253.5(V)\*11.0(D) mm  
Pitch ( mm ) : 0.297 x 0.297 mm  
Color stripe arrangement : RGB stripe arrangement  
Display surface : Anti-glare with hard coating(3H)  
Number of color : 6 bits with FRC, 16M colors  
Backlight : CCFL edge-light system  
Active area(W x H) : 304.1 x 228.1mm (15.0 " Diagonal)  
Viewing angle(CR ≥ 10) : Vertical 120 degree, Horizontal 140 degree typical.  
Contrast ratio : 500 typical.  
Luminance of white : 250 Nits typical

CLASS NO.

15" TFT XGA LCD CMTR  
TYPE: 150C5BS/00  
BRAND: PHILIPS

8639 000 15512

2004-05-27

NAME Jerry Chen/ Peter V

SUPERS.

22

590

4

10

A4

TY

CHECK

DATE

2004-05-27

Property of

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.

**PHILIPS**



Type NR. : Hannstar panel HSD150MX17  
 Outline Dimensions : 326.5(H) \* 253.5(V) \* 10.6(D)mm  
 Pitch (mm) : 0.297 x 0.297 mm  
 Color pixel arrangement : RGB stripe arrangement  
 Display surface : Anti-glare with hard coating(3H)  
 Number of color : 6 bits with FRC, 16M colors  
 Backlight : CCFL edge-light system  
 Active area (W x H) : 304.1x228.1mm(15.0 " diagonal)  
 Viewing angle (CR ≥ 10) : Vertical 100 degree, Horizontal 130 degree typical.  
 Contrast ratio : 450 typical.  
 Luminance of white : 250 Nits typical

Type NR. : QDI panel QD15XL13  
 Dimensions : 326.5(H)\*253.5(V)\*10.8(D) mm  
 Pitch ( mm ) : 0.297 x 0.297 mm  
 Color pixel arrangement : RGB stripe arrangement  
 Display surface : Anti-glare with hard coating(3H)  
 Number of color : 6 bits with FRC, 16M colors  
 Backlight : CCFL edge-light system  
 Active area(W x H) : 304.1 x 228.1mm (15.0 " Diagonal)  
 Viewing angle(CR ≥ 10) : Vertical 100 degree, Horizontal 120 degree typical.  
 Contrast ratio : 500 typical.  
 Luminance of white : 250 Nits typical

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.		15" TFT XGALCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27			22	590 — 5	10 A4
NAME Jerry Chen/ Peter V	SUPERS.				
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

- 2.2 Scanning frequencies      Hor.: 30 - 61KHz  
Ver.: 56 - 76 Hz
- 2.3 Video dot rate                : 79 MHz
- 2.4 Power input                    : 90 - 264 Vac, 50/60 ± 3 Hz
- 2.5 Power consumption          : < 20 W, ( typ : 17W)  
   : AC input power < 1W when DC switch is off.
  
- 2.6 Dimensions                    : 360W x 349H x 173.5D
- 2.7 Weight                         : 2.97kg(Net weight); 3.36kg (Gross weight)
  
- 2.8 Function:  
Signal input:  
Analog R/G/B separate inputs,  
H/V sync separated,  
Composite (H+V) TTL level,  
SOG sync
  
- 2.9 Ambient temperature: 5 - 40 °C
  
- 2.10 Safety and EMI requirements  
  
Safety requirement: CCIB/CCEE (China), CE (Europe), CSA (Canada),  
IEC60950 CB Report, NOMNYCE (Mexico),  
PSB (Singapore), SEMKO (Nordic),  
TUV (Germany), UL (USA) GOST (Russia),  
B-MARK (Poland), DEMKO (Nordic), FIMKO (Nordic),  
SISIR, CPA (Singapore), EZU (Czech)
  
- EMI requirement: BSMI (Taiwan), C-tick (Australia), CE (Europe),  
FCC (USA), IC (Canada), VCCI (Japan), CCC (China)
  
- Ergonomic Requirement: ISO13406-2, TUV/GS  
TCO99, MPRII (Sweden), Nutek (Sweden)
  
- Power management:                EPA, Nutek, E2000.
  
- Environmental & Low Emission:    MPRII, TCO99 , TCO 2003
  
- 3.0 Electrical characteristics  
  
Compatibility: PC2001, Windows 2000, Windows98/Me, Windows XP, NSTL

CLASS NO.		15" TFT XGA LCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27					
NAME	Jerry Chen/ Peter V	SUPERS.	22	590	— 6 10 A4
TY	CHECK	DATE	2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.	



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

3.1 Interface signals

3.1.1 Video

Input signal: Video, H-sync, V-sync  
Video: 0.7 Vp-p, input impedance, 75 ohm  
Sync. : Separate sync TTL level.  
Input impedance: 5k6 ohm  
Hor. Sync Positive/Negative  
Ver. Sync Positive/Negative

3.1.2 Interface Cable

D-Sub Cable pin assignment:

PIN No.	SIGNAL
1	Red
2	Green/SOG
3	Blue
4	Sense (GND)
5	Test (GND)
6	Red GND
7	Green GND
8	Blue GND
9	+5V
10	Sync GND
11	Sense (GND)
12	Serial data (SDA)
13	H/H+V sync
14	V-sync
15	Data clock (SCL)

CLASS NO.		15" TFT XGALCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27					
NAME Jerry Chen/ Peter V	SUPERS.	22	590 — 7	10	A4
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

3.2 OSD (On Screen Display) function  
Adjustable functions:

MAIN CONTROLS
LANGUAGE
ADJUST POSITION
BRIGHTNESS & CONTRAST
VIDEO NOISE
ADJUST COLOR
OSD SETTINGS
PRODUCT INFORMATION
RESET TO FACTORY SETTINGS
EXIT MAIN CONTROLS
MOVE SELECTION THEN <input type="button" value="ok"/>

LANGUAGE: ENGLISH, ESPANOL, FRANCAIS, DEUTSCH, ITALIANO, S.CHINESE

ADJUST POSITION: HORIZONTAL  
VERTICAL

BRIGHTNESS & CONTRAST: Brightness and Contrast adjustment.

VIDEO NOISE: Phase adjustment, Clock adjustment

ADJUST COLOR: Original panel color,  
9300K for general use,  
6500k for image management,  
sRGB  
User red green blue adjustable

OSD POSITION: OSD H-position, OSD V-position

PRODUCT INFORMATION: show the product information

RESET TO FACTORY SETTING: recall to Factory preset settings.

CLASS NO.

15" TFT XGA LCD CMTR  
TYPE: 150C5BS/00  
BRAND: PHILIPS

8639 000 15512

2004-05-27

NAME Jerry Chen/ Peter V

SUPERS.

22

590

8

10

A4

TY

CHECK

DATE

2004-05-27

Property of

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.

PHILIPS



3.3 Timing requirement

3.3.1 Mode storing capacity

- (1) Factory preset modes : 14
- (2) User modes : 15

3.3.2 Factory preset timings

MODE NO.	1	2	3	4
RESOLUTION	640 x 350	720 x 400	640 x 480	640x480
Dot clock (MHz)	25.175	28.321	25.175	30.240
f h	31.469kHz	31.469kHz	31.469kHz	35.0kHz
A ( us )	31.78(800 dots)	31.78(900dots)	31.778 (800 dots)	28.571(864 dots)
B ( us )	3.813(96 dots)	3.813(108dots)	3.813 ( 96 dots)	2.116( 64 dots)
C ( us )	1.907(48 dots)	1.907(54dots)	1.907 ( 48 dots)	3.175( 96 dots)
D ( us )	25.42(640 dots)	25.42(720dots)	25.422 (640 dots)	21.164(640 dots)
E ( us )	0.636(16 dots)	0.636(18dots)	0.636 ( 16 dots)	2.116( 64 dots)
f v	70Hz(70.09)	70Hz(70.087)	60Hz ( 59.940 )	66.7 Hz( 66.667 )
O (ms )	14.27(449 lines)	14.27(449 lines)	16.683 (525 lines )	15.000(525 lines )
P ( ms )	0.064(2 lines)	0.064(2 lines)	0.064 ( 2 lines )	0.086( 3 lines )
Q (ms )	1.907(60 lines)	1.112(35 lines)	1.049 ( 33 lines )	1.114( 39 lines )
R ( ms )	11.12(350 lines)	12.71(400 lines)	15.253 (480 lines )	13.714(480 lines )
S ( ms )	1.179(37 lines)	0.384(12 lines)	0.317 ( 10 lines)	0.086( 3 lines )
SYNC. H/V POLARITY	+/-	-/+	- / -	+/+ Or -/-
SEP . SYNC	Y	Y	Y	Y

All rights strictly reserved. Reproduction or issue to third parties in any form, whatever is not permitted without written authority, from the proprietors.

- A : H-Total
- O : V-Total
- B : H- Sync width
- P : V- Sync width
- C : H- Back porch
- Q : V- Back porch
- D : H- Video width
- R : V- Video width
- E : H- Front porch
- S : V- Front porch

CLASS NO.	15" TFT XGALCD CMTR TYPE: 150C5BS/00 BRAND: PHILIPS		8639 000 15512				
2004-05-27	NAME Jerry Chen/ Peter V	SUPERS.	22	590	9	10	A4
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.				





All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietors.

MODE NO.	5	6	7	8
RESOLUTION	640 x 480	640 x 480	800 x 600	800 x 600
Dot clock(MHz)	31.500	31.500	36.000	40.000
f h	37.861kHz	37.500kHz	35.156kHz	37.879kHz
A ( us )	26.413(832 dots)	26.667 (840 dots)	28.44 (1024 dots)	26.40 (1056 dots)
B ( us )	1.270(40 dots)	2.032 ( 64 dots)	2.000 ( 72 dots)	3.200 ( 128 dots)
C ( us )	4.064(128 dots)	3.810 ( 120 dots)	3.556 ( 128 dots)	2.200 ( 88 dots)
D ( us )	20.317(640 dots)	20.317 ( 640 dots)	22.22 ( 800 dots)	20.00 ( 800 dots)
E ( us )	0.762(24 dots)	0.508 ( 16 dots)	0.667 ( 24 dots)	1.000 ( 40 dots)
f v	72.809Hz	75Hz (75 )	56Hz (56.25 )	60Hz ( 60.316)
O (ms )	13.735(520 lines)	13.333 (500 lines)	17.78 (625 lines)	16.58 (628 lines)
P ( ms )	0.079(3 lines)	0.080 ( 3 lines)	0.057 ( 2 lines)	0.106 ( 4 lines)
Q (ms )	0.739(28 lines)	0.427 ( 16 lines)	0.626 ( 22 lines)	0.607 ( 23 lines)
R ( ms )	12.678(480 lines)	12.80 (480 lines)	17.07 (600 lines)	15.84 (600 lines)
S ( ms )	0.237(9 lines)	0.027 ( 1 line )	0.028 ( 1 line )	0.026 ( 1 line )
SYNC. H/V	-/-	- / -	+ / +	+ / +
POLARITY				
SEP . SYNC	Y	Y	Y	Y

MODE NO.	9	10	11	12
RESOLUTION	800 x 600	800 x 600	832 x 624	1024 x 768
Dot clock(MHz)	50.000	49.500	57.280	65.000
f h	48.077kHz	46.875kHz	49.722kHz	48.363kHz
A ( us )	20.80 (1040dots)	21.333 (1056dots)	20.11 (1152dots)	20.677(1344 dots)
B ( us )	2.400 (120 dots)	1.616 (80 dots)	1.117 (64 dots)	2.092(136 dots)
C ( us )	1.280 (64 dots)	3.232 (160 dots)	3.911 (224 dots)	2.462(160 dots)
D ( us )	16.00 (800 dots)	16.162 (800 dots)	14.52 (832 dots)	15.754(1024 dots)
E ( us )	1.120 (56 dots)	0.323 (16 dots)	0.559 (32 dots)	0.369(24 dots)
f v	72Hz (72.188)	75Hz (75.000)	75Hz (74.546)	60.004Hz
O (ms )	13.85 (666 lines)	13.333 (625lines)	13.41 (667 lines)	16.666(806 lines)
P ( ms )	0.125 (6 lines)	0.064 (3 lines)	0.060 (3 lines)	0.124(6 lines)
Q (ms )	0.478 (23 lines)	0.448 (21 lines)	0.784 (39 lines)	0.600(29 lines)
R ( ms )	12.48 (600 lines)	12.80 (600lines)	12.55 (624 lines)	15.880(768 lines)
S ( ms )	0.770 (37 line )	0.021 (1 line)	0.020 (1 lines)	0.062(3 lines)
SYNC. H/V	+ / +	+ / +	- / -	-/-
POLARITY				
SEP . SYNC	Y	Y	Y	Y

CLASS NO.

15" TFT XGALCD CMTR  
TYPE: 150C5BS/00  
BRAND: PHILIPS

8639 000 15512

2004-05-27

NAME Jerry Chen/ Peter V

SUPERS.

22

590

—

10

10

A4

TY

CHECK

DATE

2004-05-27

Property of

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.

PHILIPS



MODE NO.	13	14
RESOLUTION	1024 x 768	1024 x 768
Dot clock(MHz)	75.000	78.750
f h	56.476kHz	60.023kHz
A ( us )	17.707(1328 dots)	16.66 (1312dots)
B ( us )	1.813(136 dots)	1.219 ( 96 dots)
C ( us )	1.920(144 dots)	2.235 ( 176 dots)
D ( us )	13.653(1024 dots)	13.003 (1024dots)
E ( us )	0.320(24 dots)	0.203 ( 16 dots)
f v	70.069Hz	75Hz ( 75.029)
O (ms)	14.272(806 lines)	13.328 (800 lines)
P ( ms )	0.106(6 lines)	0.050 ( 3 lines)
Q (ms)	0.513(29 lines)	0.466 ( 28 lines)
R ( ms )	13.599(768 lines)	12.795 (768 lines)
S ( ms )	0.053(3 lines)	0.017 ( 1 line)
SYNC. H/V POLARITY	-/-	+/+
SEP . SYNC	Y	Y

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.		15" TFT XGALCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27					
NAME Jerry Chen/ Peter V	SUPERS.	22	590 — 11	10	A4
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		



3.3.3 Horizontal scanning

Sync polarity : Positive or Negative  
 Scanning frequency : 30 - 61 KHz

3.3.4 Vertical scanning

Sync polarity : Positive or Negative  
 Scanning frequency : 56 - 76 Hz

3.4 Power input connection

Power cord length : 1.8 M  
 Power cord type : L-Style type (Right Facing)  
 3 leads power cord with protective earth plug.

3.5 Power management

The power consumption and the status indication of the set with power management function are as follows,

STATUS	H-sync	V-sync	Video	Power	LED/Remark
On	On	On	Active	<20 W	Green / Without Audio
Stand-by	Off	On	Blanked	<1W	Amber
Suspend	On	Off	Blanked	<1W	Amber
Off	Off	Off	Blanked	<1W	Amber
DC Power off			N / A	<1W	LED Off

3.6 Display identification

In accordance with DDC requirement, use DDC2B and EDID 3.0 structure 1.3.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.

15" TFT XGA LCD CMTR  
 TYPE: 150C5BS/00  
 BRAND: PHILIPS

8639 000 15512

2004-05-27

NAME Jerry Chen/ Peter V

SUPERS.

22

590

—

12

10

A4

TY

CHECK

DATE

2004-05-27

Property of

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.



4.0 Visual characteristics

4.1 Test conditions

Unless otherwise specified, this specification is defined under the following conditions.

- (1) Input signal : As defined in 3.3, 1024 x 768/75Hz mode (60.023 KHz)  
Signal sources must have 75 ohms output impedance.
- (2) Luminance setting: Set contrast to 50 % and brightness to 100 % with full white pattern.
- (3) Warm-up: more than 30 minutes after power on with signal supplied.
- (4) Ambient light: 400 -- 600 lux.
- (5) Ambient temperature: 25 +/- 5 °C

4.2 Resolution

Factory preset modes (14 modes)

Mode	Resolution	H. freq. / V. freq	Standard
1.	640 x 350	31.469Khz/70.087Hz	VGA
2.	720 x 400	31.469Khz/70.087Hz	VGA
3.	640 x 480	31.469Khz/59.940Hz	VGA
4.	640 x 480	35.000Khz/66.667Hz	Macintosh
5.	640 x 480	37.861Khz/72.809Hz	VESA
6.	640 x 480	37.500Khz/75.000Hz	VESA
7.	800 x 600	35.156Khz/56.250Hz	VESA
8.	800 x 600	37.879Khz/60.317Hz	VESA
9.	800 x 600	48.077Khz/72.188Hz	VESA
10.	800 x 600	46.875Khz/75.000Hz	VESA
11.	832 x 624	49.700Khz/75.000Hz	Macintosh
12.	1024 x 768	48.363Khz/60.004Hz	VESA
13.	1024 x 768	56.476Khz/70.069Hz	VESA
14.	1024 x 768	60.023Khz/75.029Hz	VESA

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.		15" TFT XGALCD CMTR TYPE: 150C5BS/00 BRAND: PHILIPS		8639 000 15512				
2004-05-27								
NAME	Jerry Chen/ Peter V	SUPERS.	22	590	—	13	10	A4
TY	CHECK	DATE	2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.				



**PHILIPS**



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority, from the proprietors.

5.0 Mechanical characteristics

5.1 Controls

Right side: - AC power switch  
 -OSD function key

Rear: -Video signal cable  
 -Power cord socket

5.2 Unit dimension / Weight

Set dimension (incl. pedestal): 360W x 349H x 173.5D

Net weight: 2.97 Kg

5.3 Tilt and foldable base

Tilt angle: -5 ° to +25 °

Foldable angle: 90°

5.4 Transportation packages

5.4.1 Shipping dimension/Weight

Carton dimension: 389W x 387H x 115D

Gross weight: 3.36Kg

5.4.2 Block unit / Palletization

<u>layers/block</u>	<u>sets/laye</u>	<u>sets/block unit</u>
6	18	108
5	18	90

CLASS NO.		15" TFT XGALCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27			22	590 — 15	10 A4
NAME Jerry Chen/ Peter V	SUPERS.				
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		



6.0 Environmental characteristics  
The following sections define the interference and susceptibility condition limits that might occur between external environment and the display device.

6.1 Susceptibility of display to external environment  
Operating  
- Temperature : 5 to 40 degree C  
- Humidity : 20% ~ 80%  
- Altitude : 0-12,000 feet  
- Air pressure : 600-1100 mBAR

Storage  
- Temperature : -20 to 60 degree C  
- Humidity : 5% ~ 95% ( < 40°C )  
- Altitude : 0-30,000 feet  
- Air pressure : 300-1100 mBAR

Note: recommend at 5 to 35°C, Humidity less than 60 %

6.2 Transportation tests

Standard	Philips UAN-D1400	NSTA
Drop Test	Height	67/25 cm
	Sequence	1 face(btm-67cm) 5 faces(others-25cm) Btm->Btm->Btm->L->F->Rt->Rr->Top
	Test Result	1 corner 3 edge (Room temp) 6 face
Vibration Test	Sequence	Electrical function ok Mechanical function ok No serious damage on set appearance (Room temp 20°C~23°C, humidity 40%~65%)
	Test Result	(1) PACKAGING 7 Hz, 1.05 G, 30 min. for transport direction only (2) OPERATING 7 Hz, 10.6 mm, 30 min. for transport direction only
Bump Test	Electrical function ok Mechanical function ok No serious damage on set appearance	
Bump Test	For design evaluation only Operating 10 G, 11 msec, 1000 cycles Temperature : 23°C Humidity : 60 % Air pressure : 100 kpa (According to DSD draft standard UAN-D636)	

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.

15" TFT XGA LCD CMTR  
TYPE: 150C5BS/00  
BRAND: PHILIPS

8639 000 15512

2004-05-27

NAME Jerry Chen/ Peter V

SUPERS.

22

590

16

10

A4

TY

CHECK

DATE

2004-05-27

Property of

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.



PHILIPS



B. regions of China & India

Standard		Philips UAN-D1400	NSTA
Drop Test	Height	a.80\ b.60\ c.70 cm	76.0 cm
	Sequence	a.Face: Btm->F->L->Rr->Rt(80cm) b.Edge: F-Btm,Rt-Btm,F-Rt Corner:Rt-Btm-F(60cm) c.Btm->Btm(70cm)	1 corner 3 edge  (Room temp) 6 face
	Test Result	Electrical function ok Mechanical function ok No serious damage on set appearance (Room temp 20°C~23°C, humidity 40%~65%)	
Vibration Test	Sequence	(1) 10-30-10 Hz, 0.75mm,5cycles, 15 min. for X,Y,Z (2) 30-55-30 Hz, 0.25mm, 5cycles ,9 min. for X,Y,Z	
	Test Result	Electrical function ok Mechanical function ok No serious damage on set appearance	
Bump Test	For design evaluation only Operating 100m/s <sup>2</sup> , 16 msec, 1000 pulses Bump frequency: 60~80times/min  Source:GB9384-97		

All rights strictly reserved. Reproduction or issue to third parties in any form, whatever is not permitted without written authority, from the proprietors.

- 6.3 Display disturbances from external environment  
According to IEC 801-2 for ESD disturbances
- 6.4 Display disturbances to external environment
- 6.4.1 EMI  
EMI: FCC, IC, VCCI, CE, C-Tick, MPRII, BSMI, CCC (China)
- 7.0 Reliability
- 7.1 Mean time between failures (MTBF)  
System MTBF (Excluding the LCD panel and CCFL): 50,000 hrs  
CCFL MTBF: 30,000 hrs
- 8.0 Quality assurance requirements
- 8.1 Acceptance test

CLASS NO.		15" TFT XGA LCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27					
NAME Jerry Chen/ Peter V	SUPERS.	22	590 — 17	10	A4
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

According to MIL-STD-105D Control II level

AQL : 0.65 (major)  
1.5 (minor)  
(Please also refer to annual quality agreement)


9.0 Serviceability  
The serviceability of this monitor should fulfill the requirements which are prescribed in UAW-0346 and must be checked with the check list UAT-0361.

CLASS NO.		15" TFT XGA LCD CMTR		8639 000 15512	
2004-05-27		TYPE: 150C5BS/00			
NAME Jerry Chen/ Peter V		SUPERS.		22 590 — 18 10 A4	
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		

PHILIPS



Fig 1: Brightness and Uniformity

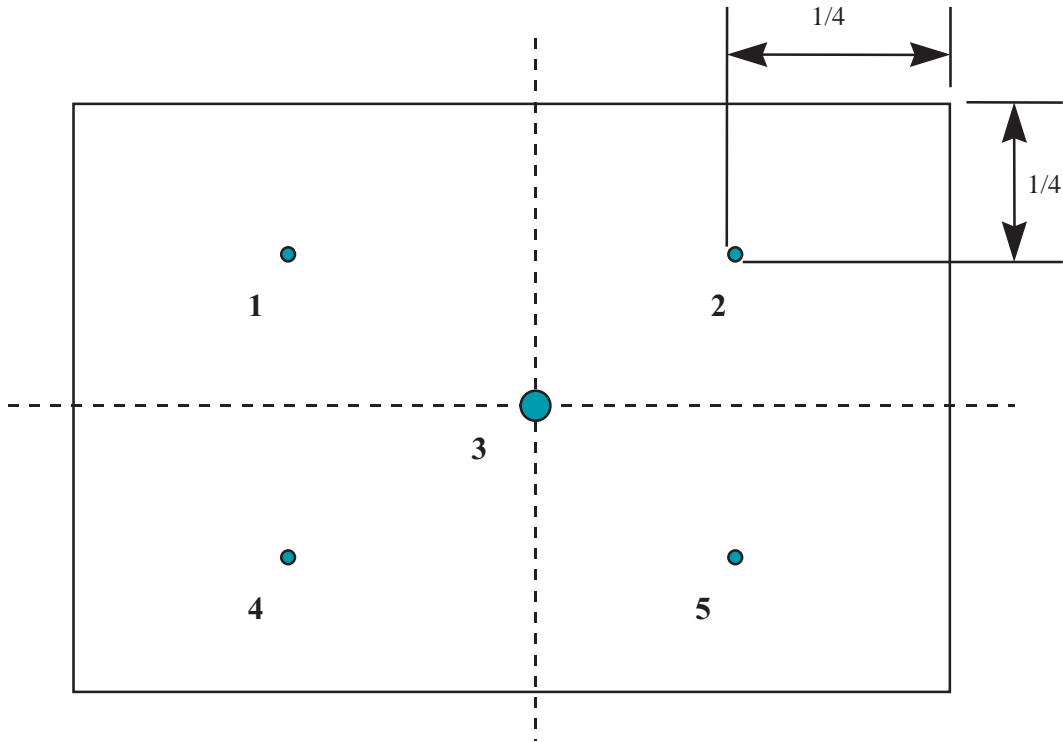

Average: 5 points average

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.		15" TFT XGALCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27			22	590 — 19	10
NAME Jerry Chen/ Peter V		SUPERS.		A4	
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

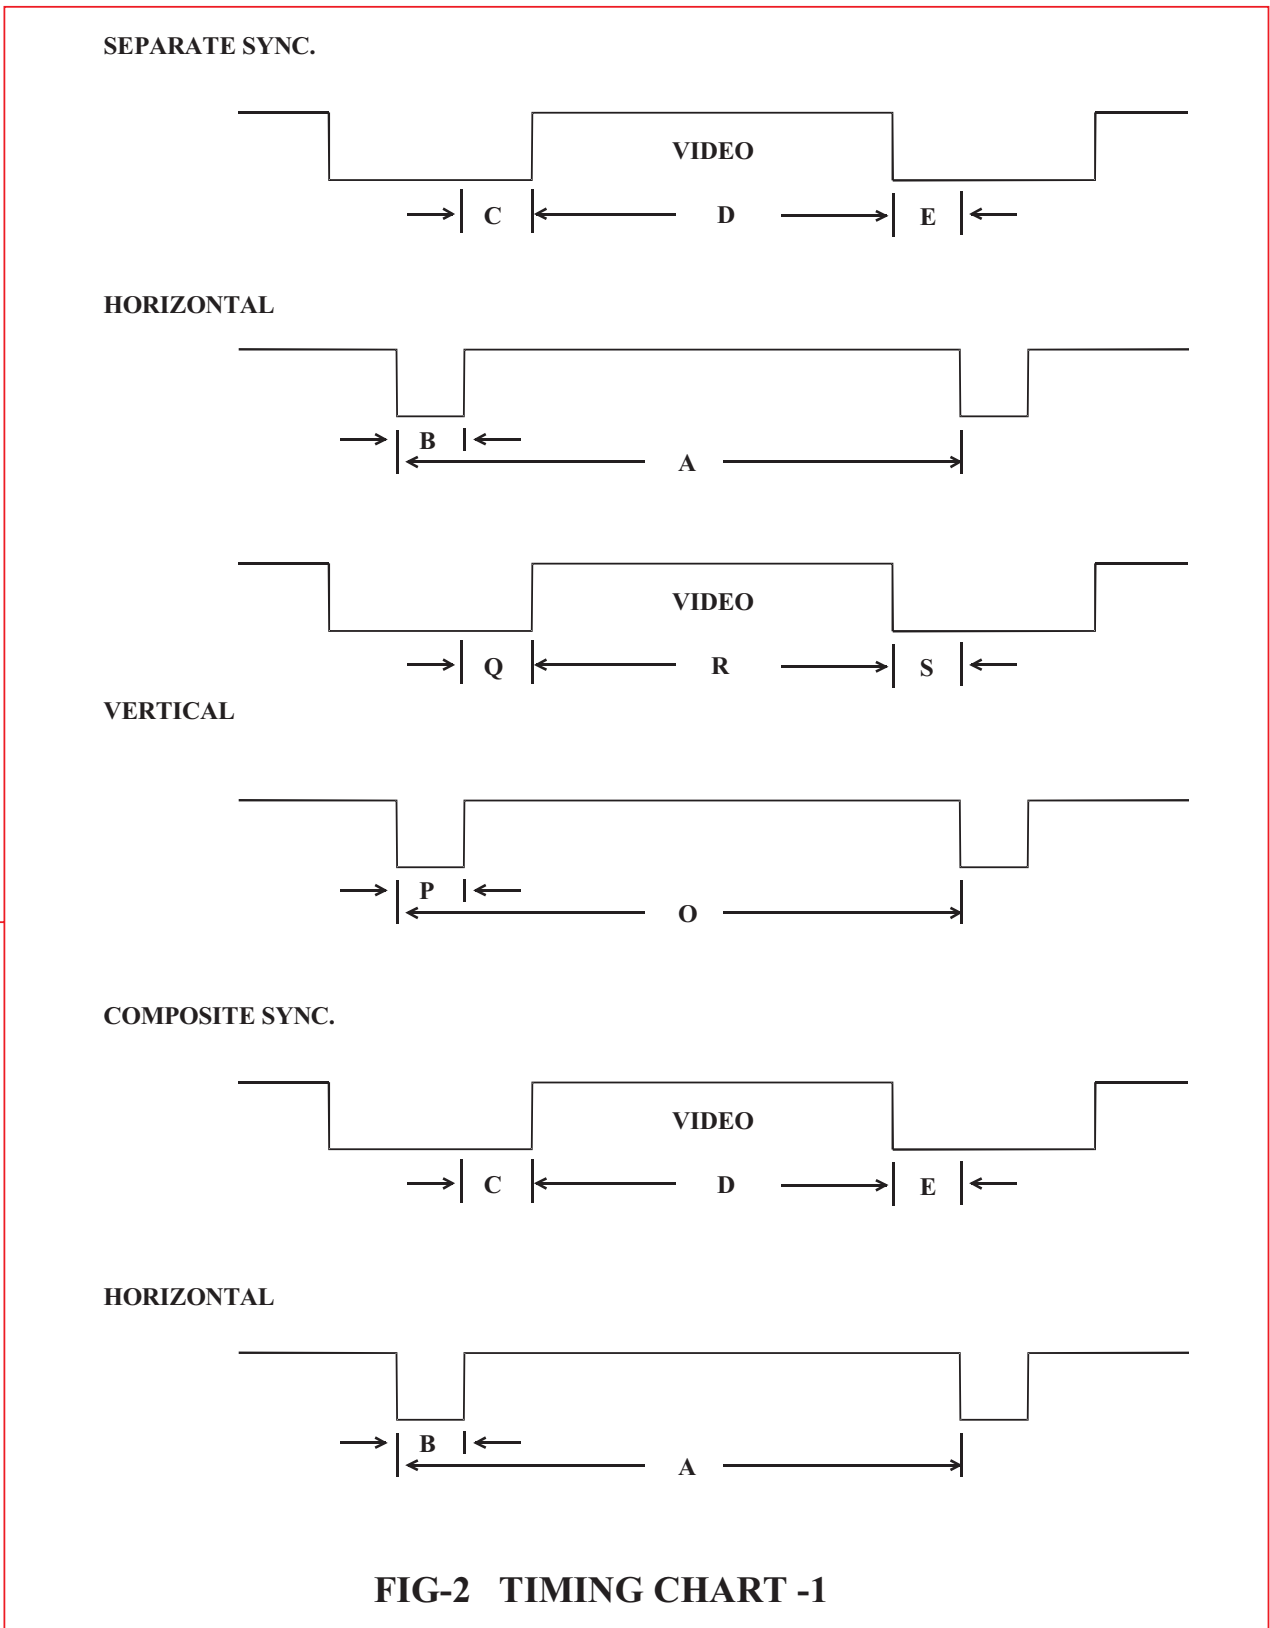



FIG-2 TIMING CHART -1

CLASS NO.	15" TFT XGA LCD CMTR		8639 000 15512	
	TYPE: 150C5BS/00			
	BRAND: PHILIPS			
2004-05-27	22	590	20	10
NAME: Jerry Chen/ Peter V	SUPERS.			A4
TY	CHECK	DATE: 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.	

**PHILIPS**



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

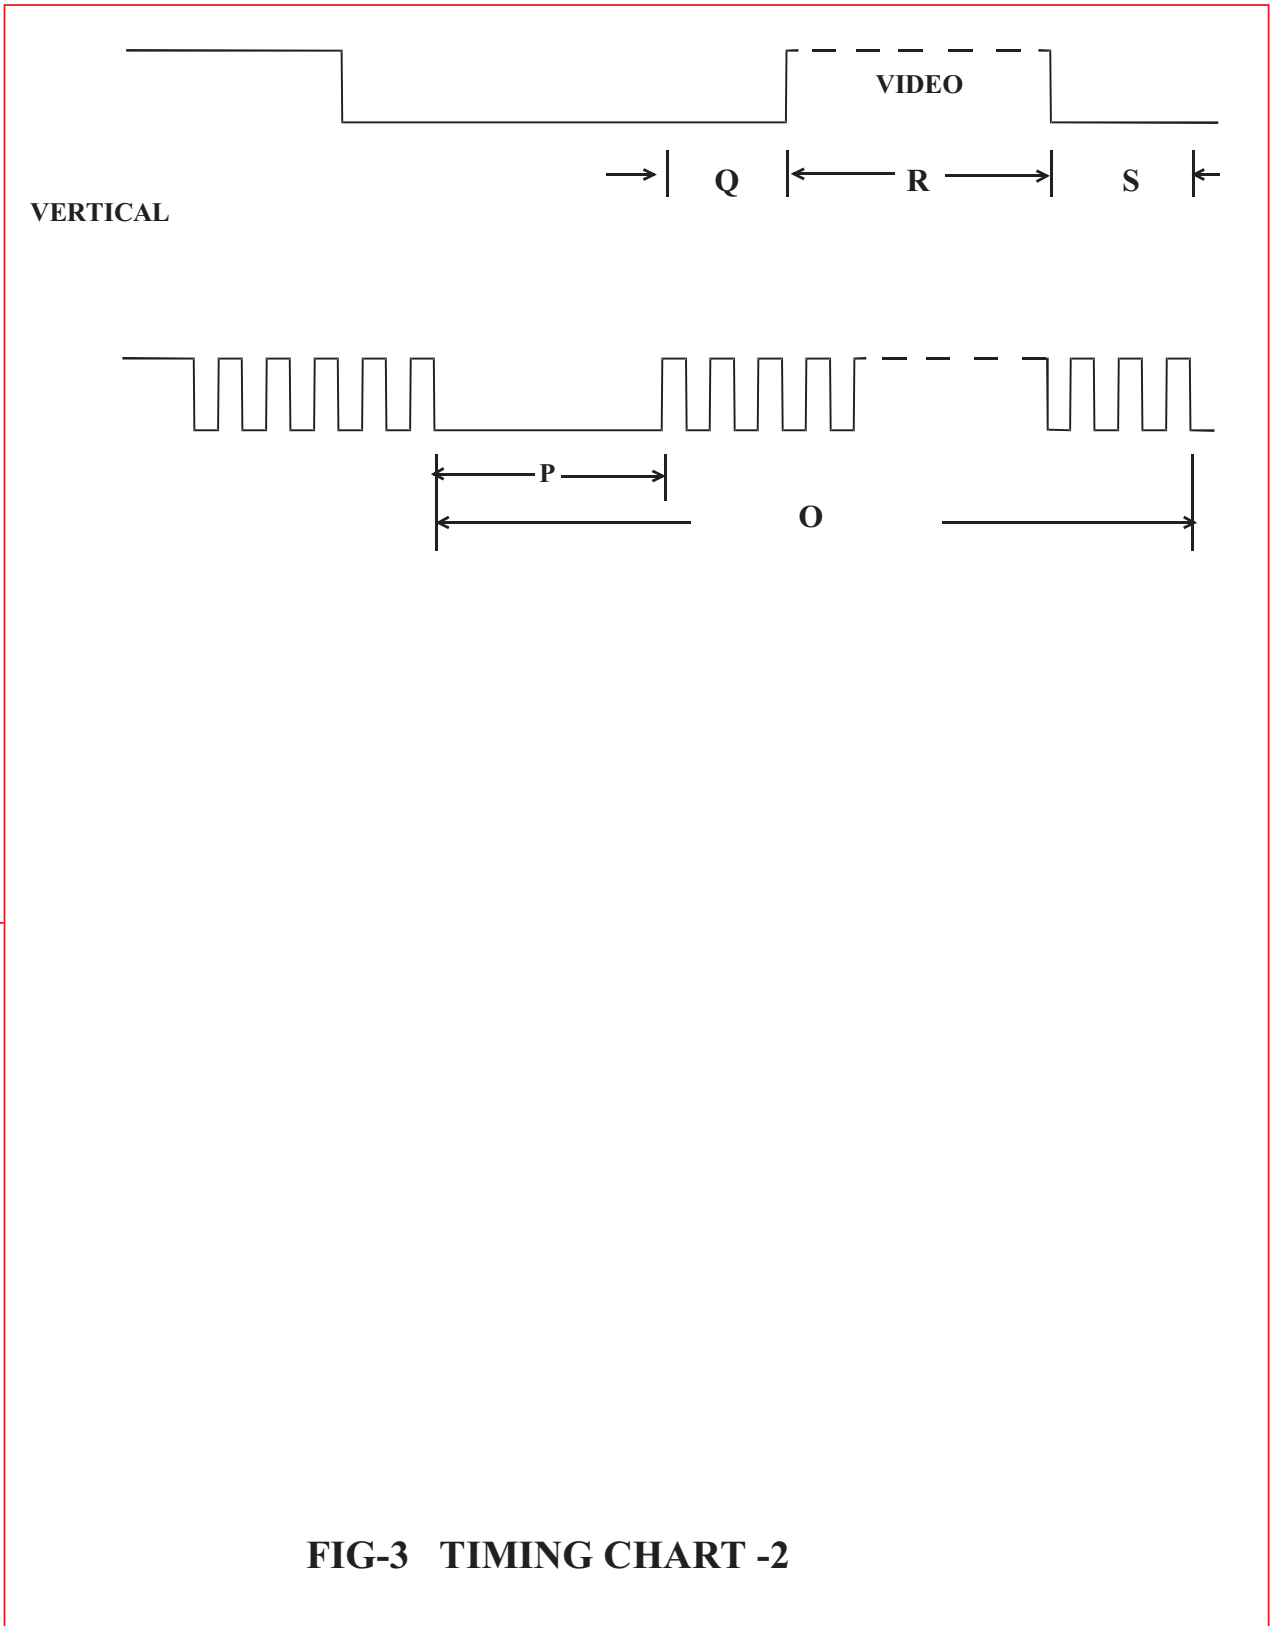

**FIG-3 TIMING CHART -2**

CLASS NO.		15" TFT XGALCD CMTR		8639 000 15512	
		TYPE: 150C5BS/00			
		BRAND: PHILIPS			
2004-05-27			22	590 — 21	10
NAME Jerry Chen/ Peter V	SUPERS.				A4
TY	CHECK	DATE 2004-05-27	Property of PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.		



Philips' Flat Panel Monitors Pixel Defect Policy

Philips' Flat Panel Monitors Pixel Defect Policy

BRIGHT DOT DEFECTS	ACCEPTABLE LEVEL			
	MODEL	150C5	170C5	170X5
1 lit sub pixel	4 or fewer	4 or fewer	0	2 or fewer
2 adjacent lit sub pixels	2 or fewer	2 or fewer	0	1 or fewer
3 adjacent lit sub pixels (one white pixel)	0	0	0	0
Distance between two bright dot defects*	15 mm or more	15 mm or more	0	15 mm or more
Total bright dot defects of all types	4 or fewer	4 or fewer	0	2 or fewer

BLACK DOT DEFECTS	ACCEPTABLE LEVEL			
	MODEL	150C5	170C5	170X5
1 dark sub pixel	4 or fewer	4 or fewer	4 or fewer	4 or fewer
2 adjacent dark sub pixels	2 or fewer	2 or fewer	1 or fewer	2 or fewer
3 adjacent dark sub pixels	0	0	0	0
Distance between two black dot defects*	15 mm or more	15 mm or more	15 mm or more	5 mm or more
Total black dot defects of all types	4 or fewer	4 or fewer	4 or fewer	4 or fewer

TOTAL DOT DEFECTS	ACCEPTABLE LEVEL			
	MODEL	150C5	170C5	170X5
Total bright or black dot defects of all types	5 or fewer	5 or fewer	4 or fewer	5 or fewer

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

CLASS NO.

15" TFT XGA LCD CMTR  
TYPE: 150C5BS/00  
BRAND: PHILIPS

8639 000 15512

2004-05-27

NAME Jerry Chen/ Peter V

SUPERS.

22

590

— 22

10

A4

TY

CHECK

DATE

2004-05-27

Property of

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.-B.E.

## General

### DDC Data Re-programming

In case the DDC data memory IC or main EEPROM which storage all factory settings were replaced due to a defect, the serial numbers have to be re-programmed "Analog DDC IC, & EEPROM". It is advised to re-soldered DDC IC and main EEPROM from the old board onto the new board if circuit board have been replaced, in this case the DDC data does not need to be re-programmed.

### Additional information

Additional information about DDC (Display Data Channel) may be obtained from Video Electronics Standards Association (VESA). Extended Display Identification Data(EDID) information may be also obtained from VESA.

## System and equipment requirements

1. An i486 (or above) personal computer or compatible.
2. Microsoft operation system Windows 95/98 .  
You have to Install the EDID\_PORT\_Tool under Win2000/XP . As Fig. 1 .

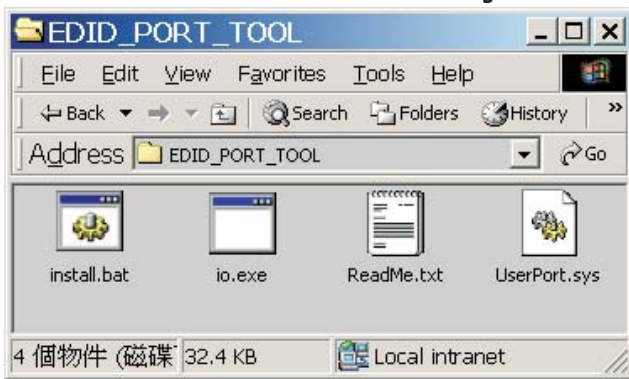


Fig. 1


- A. Copy the "UserPort.sys" to C:\WINNT\system32\drivers(win2000)  
C:\WINDOWS\system32\drivers(winXP)
  - B. Running " io.exe" everytime, Before you start to programming edid data .
3. EDID46.EXE program
  4. A/D Alignment kits (12NC: 3138 106 10079)(as Fig. 2):  
inclusion : a. Alignment box x1



Fig. 2

- a. Alignment box x1
- b. Printer cable x1
- c. (D-Sub) to (D-Sub) cable x1
- D. (D-Sub) to (DVI) cable x1

Note: The EDID46.EXE is a windows-based program, which cannot be run in MS-DOS.



### Pin assignment

15-pin D-Sub Connector

PIN No.	SIGNAL
1	Red video input
2	Green video input / sync on green
3	Blue video input
4	GND
5	GND -Cable detect
6	Red video GND
7	Green video GND
8	Blue video GND
9	DDC +3.3V or +5V
10	Logic GND
11	GND
12	Serial data line (SDA)
13	H-sync / H+V
14	V-sync
15	Data clock line (SCL)

## Configuration and procedure

There is no Hardware DDC (DDC IC) anymore. Main EEPROM stores all factory settings and DDC data (EDID code) which is also called Software DDC. The following section describes the connection and procedure for Software DDC application. The main EEPROM can be re-programmed by enabling " factory memory data write" function on the DDC program (EDID46.EXE).

### Initialize alignment box

In order to avoid that monitor entering power saving mode due to sync will cut off by alignment box, it is necessary to initialize alignment box before running programming software (EDID46.EXE). Following steps show you the procedures and connection.

- Step 1: Supply 8-12V DC power source to the Alignment box by plugging a DC power cord .
- Step 2: Connecting printer cable and D-Sub cable of monitor as Fig. 3

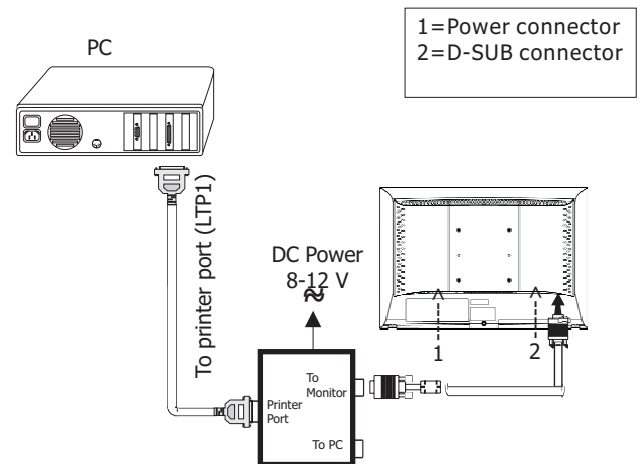



Fig. 3



Step 3: Installation of EDID46.EXE

Method 1: Start on DDC program

Start Microsoft Windows.

1. The Program "EDID46.EXE" in service manual cd-rom be copied to C:\.
2. Click  Start, choose Run at start menu of Windows as shown In Fig. 4.

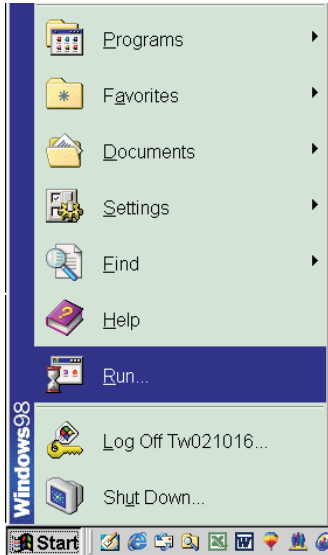


Fig. 4

3. At the submenu, type the letter of your computer's hard disk drive followed by :EDID46 (for example, C:\EDID46, as shown in Fig. 5).

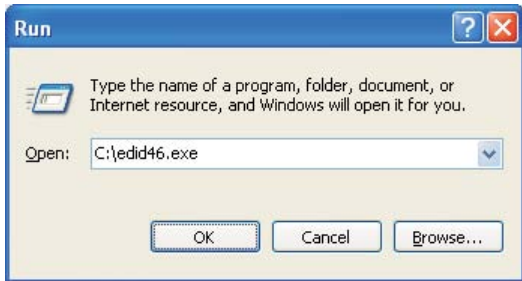


Fig. 5

4. Click OK button. The main menu appears (as shown in Fig. 6). This is for initialize alignment box.

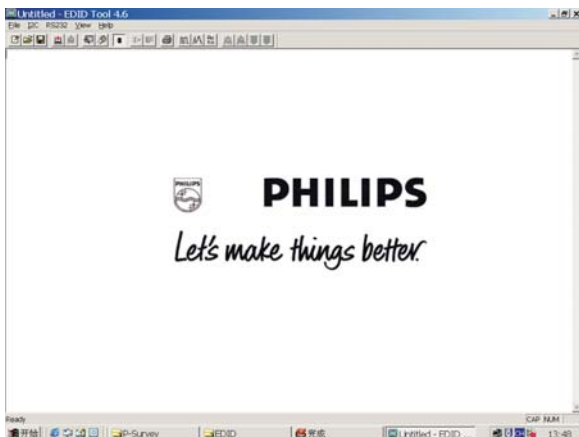


Fig. 6

Note 1: If the connection is improper, you will see the following error message (as shown in Fig. 7) before entering the main menu. Meanwhile, the (read EDID) function will be disable. At this time, please make sure all cables are connected correctly and fixedly, and the procedure has been performed properly.




Fig. 7

Note 2: During the loading, EDID46 will verify the EDID data which just loaded from monitor before proceed any further function, once the data structure of EDID can not be recognized, the following error message will appear on the screen as below. Please confirm following steps to avoid this message.

1. The data structure of EDID was incorrect.
2. DDC IC that you are trying to load data is empty.
3. Wrong communication channel has set at configuration setup windows.
4. Cables loosed or poor contact of connection.



Fig. 8

Re-programming EEPROM(Software DDC IC)

Step 1: After initialize alignment box, connecting all cables and box as shown in Fig. 9

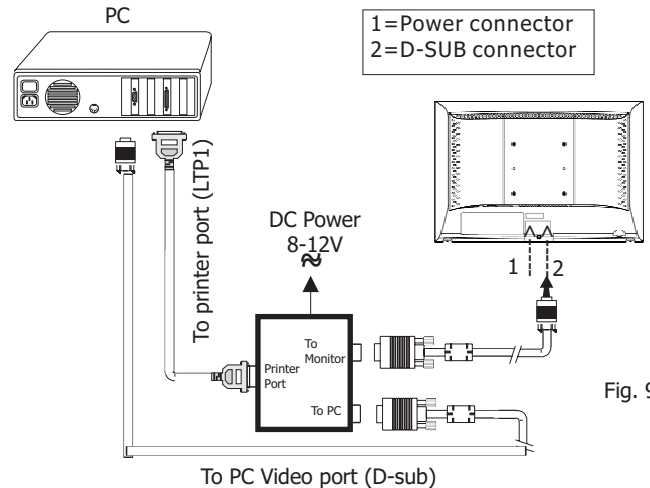


Fig. 9

Step 2: Read DDC data from monitor

1. Click  icon as shown in Fig. 10 from the tool bar to bring up the Channels "Configuration Setup" windows as shown in Fig. 11.

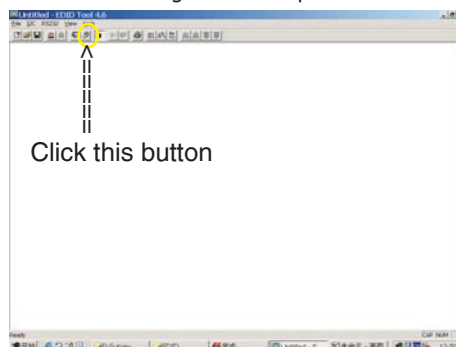


Fig. 10

2. Select the DDC2Bi as the communication channel.  
As shown in Fig. 11.

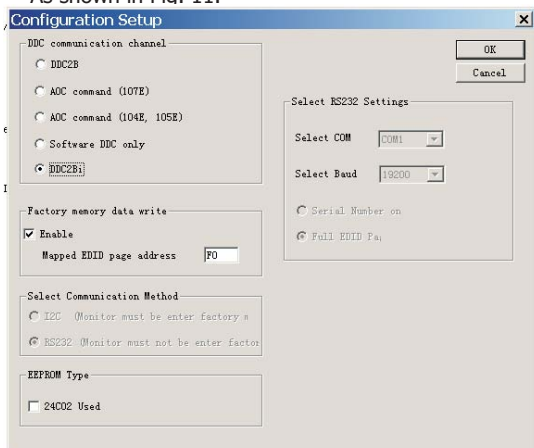


Fig. 11

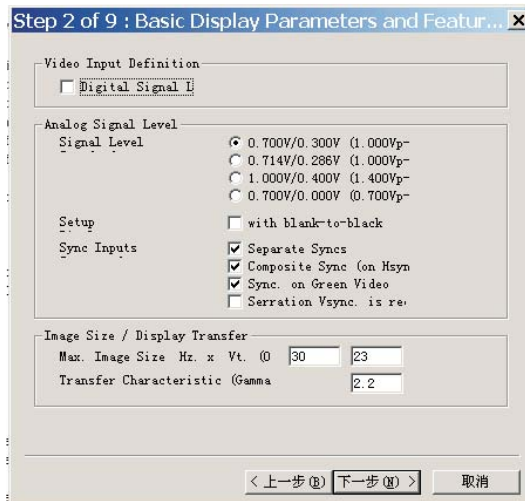


Fig. 14

3. Click OK button to confirm your selection.
4. Click icon (Read EDID function) to read DDC EDID data from monitor. The EDID codes will display on screen as shown in Fig. 12.

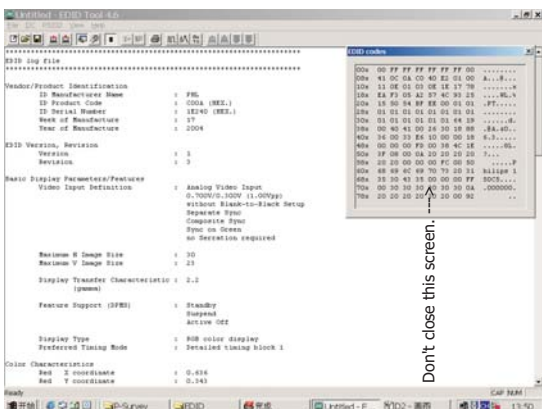


Fig. 12

2. Click Next, bring up Fig. 15.

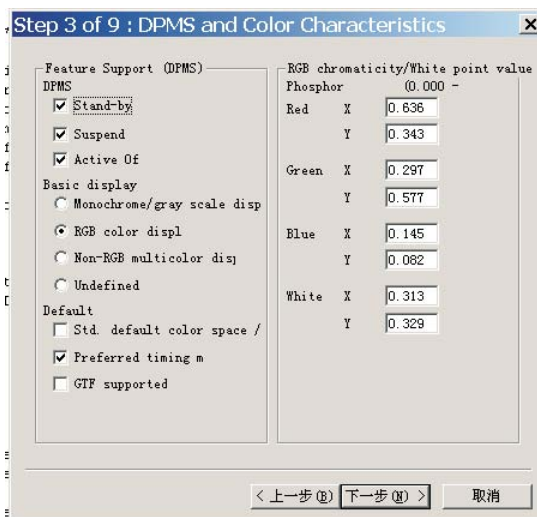


Fig. 15

Step 3: Modify DDC data (verify EDID version, week, year)

1. Click (new function) icon from the tool bar, bring up Step 1 of 9 as shown in Fig. 13.  
EDID46 DDC application provides the function selection and text change (select & fill out) from Step 1 to Step 9.

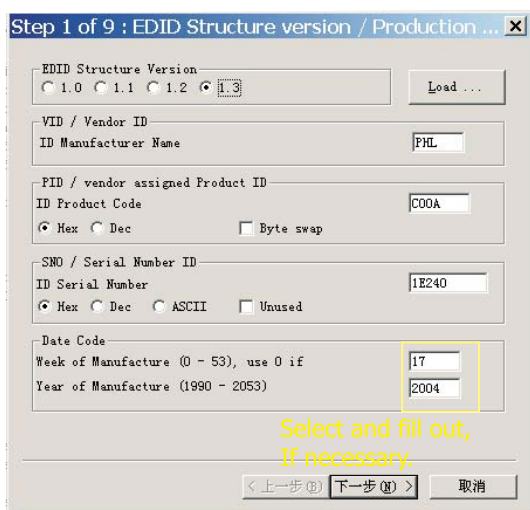


Fig. 13

Step 4: Modify DDC data (Monitor Serial No.)

1. Click Next, bring up Fig. 14.

3. Click Next, bring up Fig. 16.

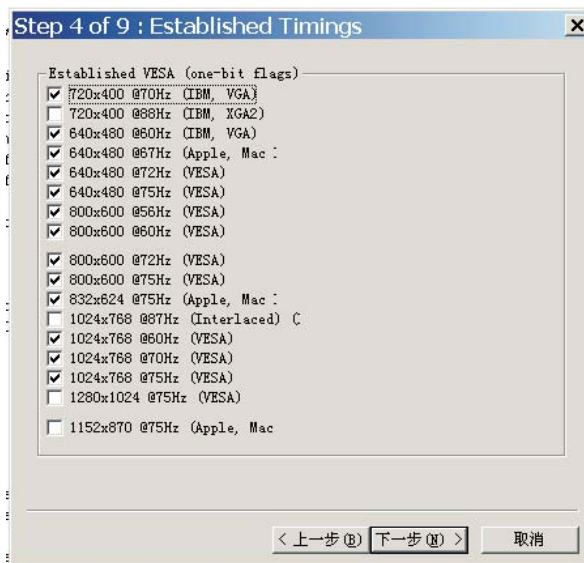


Fig. 16

Go to cover page

4. Click Next , bring up Fig. 17.

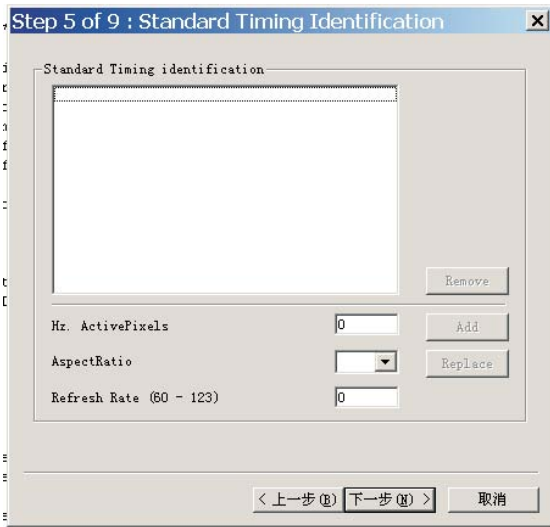


Fig. 17

5. Click Next , bring up Fig. 18.

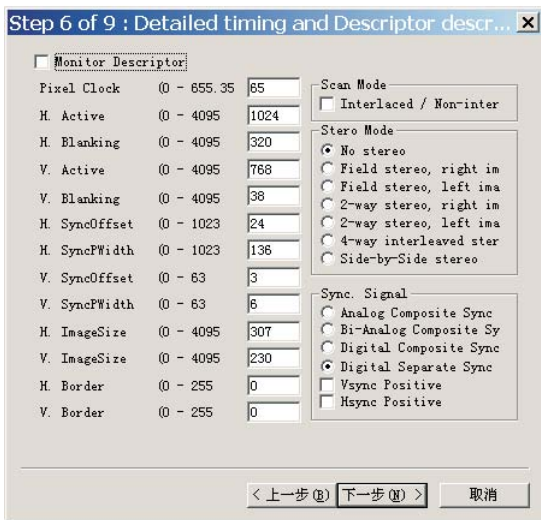


Fig. 18

6. Click Next , bring up Fig. 19.

In this step, please confirm the Descriptor Data Type is Monitor Range Limits, and all the items are same as below.

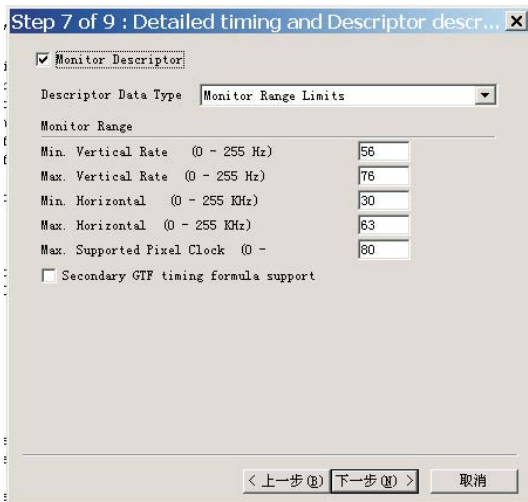


Fig. 19

7. Click Next , bring up Fig. 20.

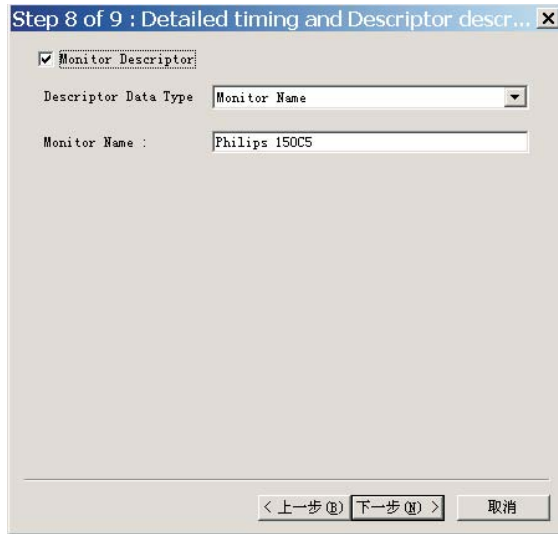


Fig. 20

8. Click Next , bring up Fig. 21.

- Click Finish to exit the Step window.
- Serial number can be filled up at this moment (for example, TY 23456).

NOTE: You must modify the Serial NO. In step 9, otherwise the Serial NO. In OSD Couldn't be modified correctly.

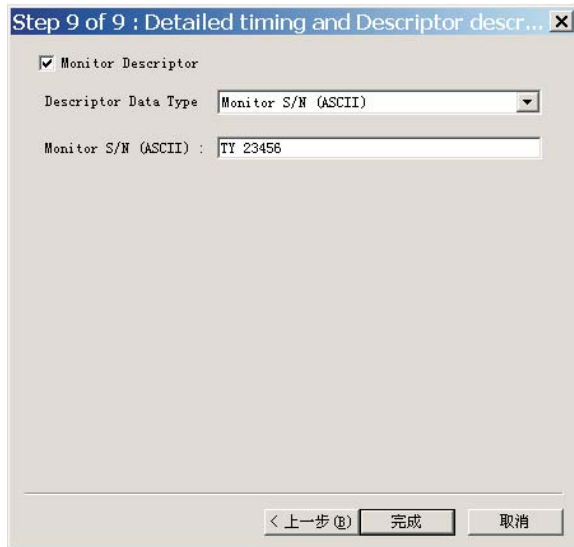


Fig. 21

Step 5: Write DDC data

1. Configuration should be as Fig. 22. And press OK.

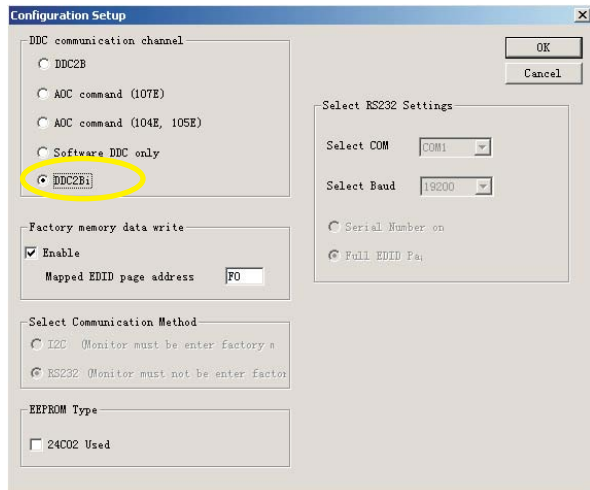


Fig. 22

2. Access Factory Mode

- 1). Turn off monitor.
- 2). [Push "AUTO" & "OK" buttons at the same time and hold it ] + [Press power " " button until comes out "Windows screen"] => then release all button, then press "OK" button, wait until the OSD menu with Characters HUDSON 150C5 V200 20040705 (below OSD menu) come on the Screen of the monitor (see Fig. 23).



Factory Mode Indicator =====>

Fig. 23

- 3) Push "OK" to exit OSD menu.

- 4). Click (Write EDID) icon from the tool bar to write DDC data. Bring up "ready" a progressing bar on the left, then bring up the Window as shown in Fig.24, click the "enter" button to finish Writing



Fig.24

4. Confirm Serial Number in User Mode

- 1) Press the power button to turn off the monitor. Press the button again to turn on the monitor.
- 2) Press the "OK" button to bring up the OSD main menu.
- 3) Press the down arrow button to "PRODUCT INFORMATION", press the button to confirm your selection.
- 4) Confirm the Serial Number "TY 23456" is updated as shown in Fig. 25.

PRODUCT	INFORMATION
SERIAL NO. :	TY 23456
RESOLUTION :	1024 X 768 @ 74HZ
VIDEO INPUT :	ANALOG
OK BACK TO MAIN CONTROLS	

Fig. 25

Step 6: Save DDC data

Sometimes, you may need to save DDC data as a text file for using in other IC chip. To save DDC data, follow the steps below:

1. Click (Save) icon (or click "file"-> "save as") from the tool bar and give a file name as shown in Fig. 26. The file type is EDID46 file (\*.ddc) which can be open in WordPad. By using WordPad, the texts of DDC data & table (128 bytes, hex code) can be modified. If DDC TEXTS & HEX Table are completely correct, it can be saved as .ddc file to re-load it into DDC IC for DDC Data application.

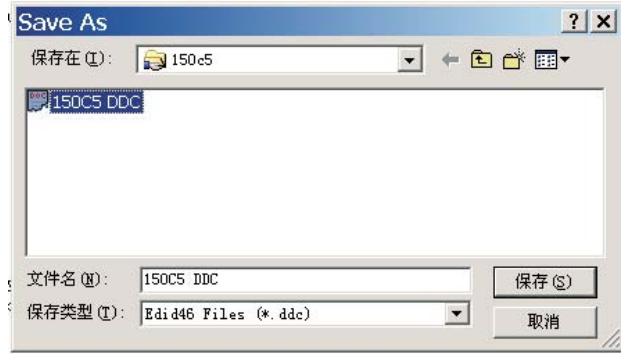


Fig. 26

2. Click Save.

Step 7: Exit DDC program

Pull down the File menu and select Exit as shown in Fig. 26.

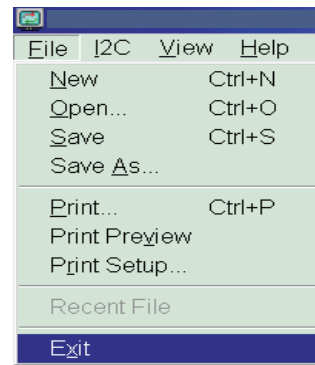


Fig. 26

Step 8: Turn off the monitor, exit the factory mode.



Go to cover page

THE DISPLAY DATA CHANNEL (DDC) 2B CONTENT INCLUDING:  
(150C5 FOR LG/CPT/QDI/Hannstar PANEL ANALOG)

EDID log file

Vendor/Product Identification

ID Manufacturer Name : PHL
ID Product Code : C00A(HEX.)
ID Serial Number : 123456 (DEC.)
Week of Manufacture : 17
Year of Manufacture : 2004

EDID Version, Revision

Version : 1
Revision : 3

Basic Display Parameters/Features

Video Input Definition : Analog Video Input
0.700V/0.300V (1.00 Vpp)
Without Blank-to-Black Setup
Separate Sync
Composite Sync
Sync on Green
No Serration required

Maximum H Image Size : 30
Maximum V Image Size : 23
Display Transfer Characteristic: 2.2
(gamma)

Feature Support (DPMS) : Standby
Suspend
Active Off

Display Type : RGB color display
Preferred Timing Mode : Detailed timing block 1

Color Characteristics

Red X coordinate : 0.636
Red Y coordinate : 0.343
Green X coordinate : 0.297
Green Y coordinate : 0.577
Blue X coordinate : 0.145
Blue Y coordinate : 0.082
White X coordinate : 0.313
White Y coordinate : 0.329

Established Timings

Established Timings I : 720 x 400 @70Hz (IBM,VGA)
640 x 480 @60Hz (IBM,VGA)
640 x 480 @67Hz (Apple, Mac II)
640 x 480 @72Hz (VESA)
640 x 480 @75Hz (VESA)
800 x 600 @56Hz (VESA)
800 x 600 @60Hz (VESA)

Established Timings II : 800 x 600 @72Hz (VESA)
800 x 600 @75Hz (VESA)
832 x 624 @75Hz (Apple, Mac II)
1024 x 768 @60Hz (VESA)
1024 x 768 @70Hz (VESA)
1024 x 768 @75Hz (VESA)

Manufacturer's timings:

Standard Timing Identification : Unused

Detailed Timing #1

Pixel Clock (MHz) : 65
H Active (pixels) : 1024
H Blanking (pixels) : 320
V Active (lines) : 768
V Blanking (lines) : 38
H Sync Offset (F Porch) (pixels): 24

H Sync Pulse Width (pixels) : 136
V Sync Offset (F Porch) (lines) : 3
V Sync Pulse Width (lines) : 6
H Image Size (mm) : 307
V Image Size (mm) : 230
H Border (pixels) : 0
V Border (lines) : 0
Flags : Non-interlaced
Normal Display, No stereo
Digital Separate sync.
Negative Vertical Sync.
Negative Horizontal Sync.

Standard Timing Identification #2

Monitor Range Limits
Min. Vt rate Hz : 56
Max. Vt rate Hz : 76
Min. Horiz. rate kHz : 30
Max. Horiz. rate kHz : 63
Max. Supported Pixel : 80

No secondary GTF timing formula supported.

Monitor Descriptor #3

Monitor Name : Philips 150C5

Monitor Descriptor #4

Serial Number : TY 123456

Extension Flag : 0

Check sum : 10 (HEX.)

EDID data (128 bytes)

0: 00 1: ff 2: ff 3: ff 4: ff 5: ff 6: ff 7: 00
8: 41 9: 0c 10: 0a 11: c0 12: 40 13: e2 14: 01 15: 00
16: 11 17: 0e 18: 01 19: 03 20: 0e 21: 1e 22: 17 23: 78
24: ea 25: f3 26: 05 27: a2 28: 57 29: 4c 30: 93 31: 25
32: 15 33: 50 34: 54 35: bf 36: ee 37: 00 38: 01 39: 01
40: 01 41: 01 42: 01 43: 01 44: 01 45: 01 46: 01 47: 01
48: 01 49: 01 50: 01 51: 01 52: 01 53: 01 54: 64 55: 19
56: 00 57: 40 58: 41 59: 00 60: 26 61: 30 62: 18 63: 88
64: 36 65: 00 66: 33 67: e6 68: 10 69: 00 70: 00 71: 18
72: 00 73: 00 74: 00 75: ff 76: 00 77: 20 78: 54 79: 59
80: 20 81: 20 82: 31 83: 32 84: 33 85: 34 86: 35 87: 36
88: 0a 89: 20 90: 00 91: 00 92: 00 93: fc 94: 00 95: 50
96: 68 97: 69 98: 6c 99: 69 100: 70 101: 73 102: 20 103: 31
104: 35 105: 30 106: 43 107: 35 108: 00 109: 00 110: 00 111: fd
112: 00 113: 38 114: 4c 115: 1e 116: 3f 117: 08 118: 00 119: 0a
120: 20 121: 20 122: 20 123: 20 124: 20 125: 20 126: 00 127: 10

## Configuration and procedure

"Easywriter " The software is provided by Novatek to upgrade the firmware of CPU.  
It is a windows-based program, which cannot be run in MS-DOS.  
DDC2BI\_ISP TOOL (3138 106 10396) is for the interface between "Parallel Port of PC" and "15 pin-D-SUB connector of Monitor".

## System and equipment requirements

1. An i486 (or above) personal computer or compatible.
2. Microsoft operation system Windows 95/98/2000/XP.
3. ISP Software " Easywriter "
4. DDC2BI\_ISP TOOL (3138 106 10396) as shown in Fig. 1

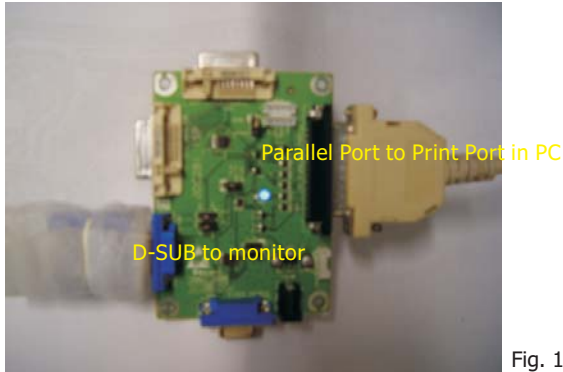


Fig. 1

5. Connect DDC2BI\_ISP TOOL and Mains cord to Monitor as shown in Fig. 2.

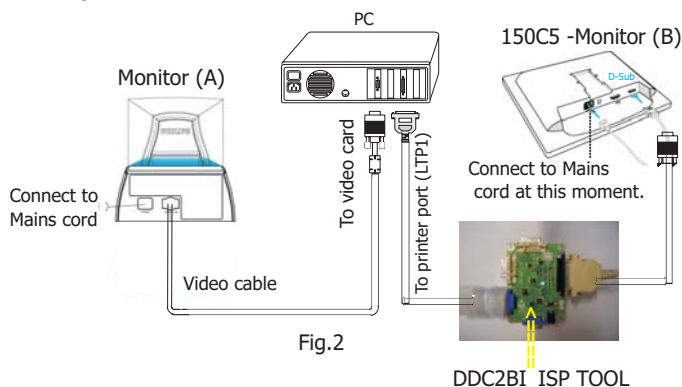


Fig.2

NOTE: You can use A/D alignment kits (12NC: 3138 106 10079) to perform this work also, the connection as shown in Fig. 3. All the perform steps are same as DDC2BI\_ISP TOOL.

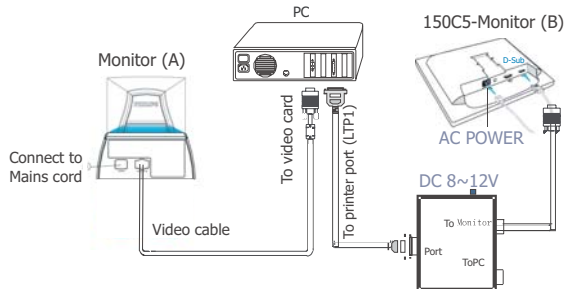


Fig. 3

6. Install and setup the Easywriter program

- Step 1 : Make a folder in your PC as shown in Fig. 3.  
For example : D:\150C5
- Step 2 : Copy ISP Software Easywriter.zip into your folder as shown in Fig. 4.
- Step 3 : Unzip Easywriter.zip into your folder as shown in Fig. 4.
- Step 4 : Double click the EasywriterV2.09.exe icon to install the Application as Fig. 5.



Fig. 4



Fig. 5

- Step 5 : Copy the 313811707321\_141\_4902.hex to D:\150C5 shown As Fig. 6.

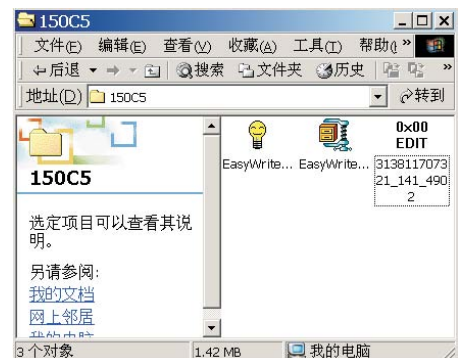


Fig. 6

Go to cover page

### Update the firmware

1. Double click the Easywriter.exe icon in desktop then appears window as shown in Fig.7 .



Fig. 7

2. Press the "Load hex" button then select the 313811707321\_141\_4902 As shown in Fig. 8 and Fig. 9.

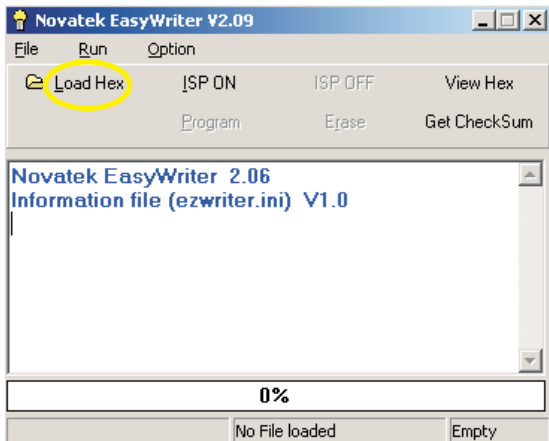


Fig. 8

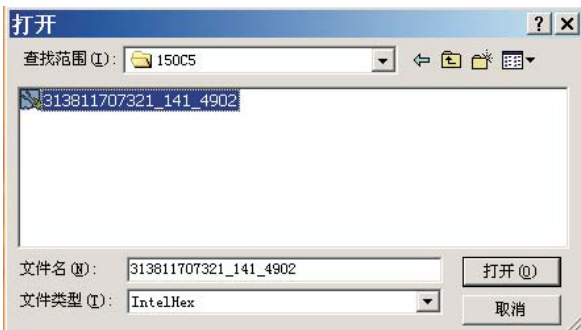


Fig. 9

3. From the menu that appears, choose the "NT68F633(64K)" as shown in Fig. 10.

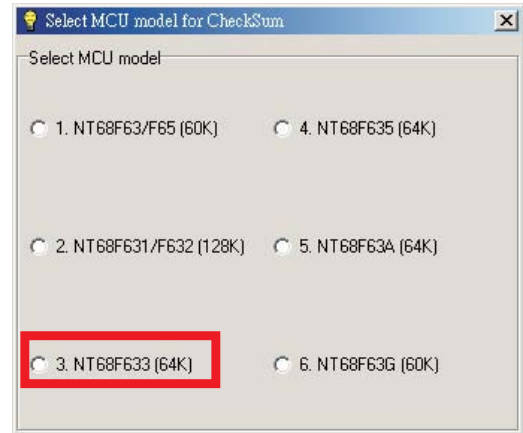


Fig. 10

4. Press the AUTO to running program , the firmware be updated as shown in Fig. 11~12.

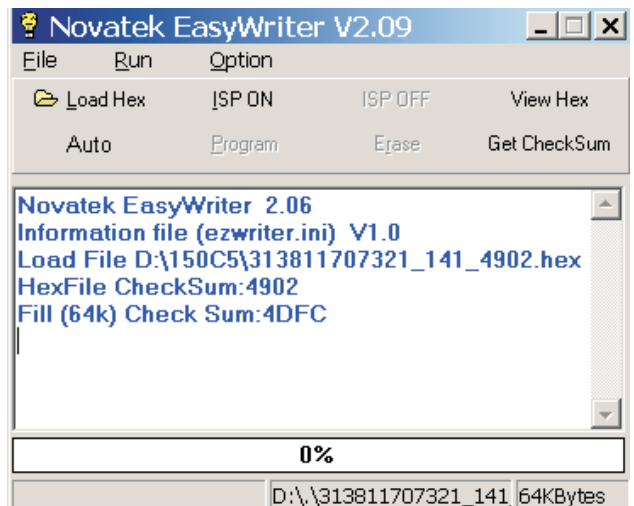


Fig. 11

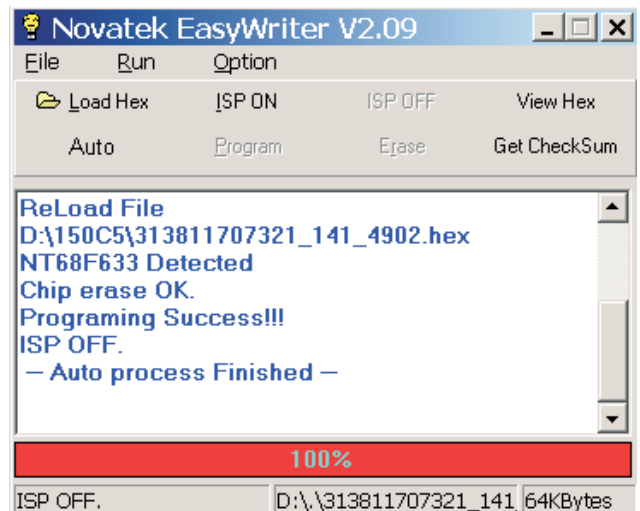


Fig. 12



5 Press the file --> exit to end program , as shown in Fig. 13.

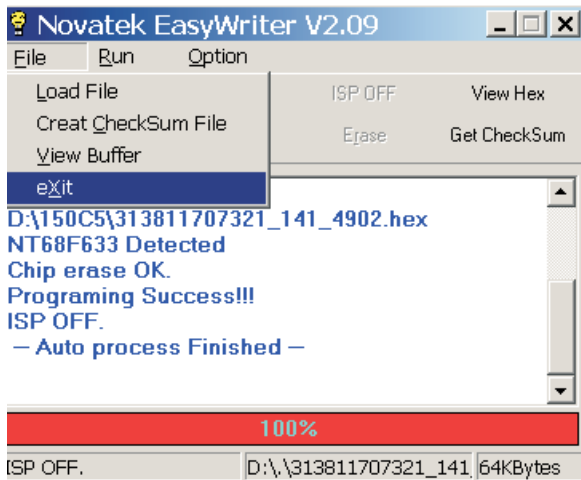


Fig. 13

If there is a warning message coming as shown in Fig 14. , you have to check the AC power, Video cable, or Novatek MCU.

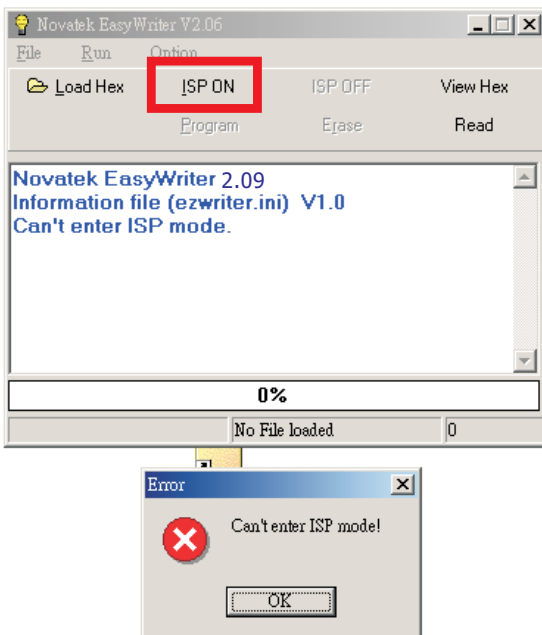


Fig. 14

6. Check the firmware version

1). Turn off monitor.

2). [Push " AUTO " & " (OK) " buttons at the same time and hold it ] + [Press power " ⏻ " button until comes out "Windows screen" ] => then release all button, then press (OK) button, wait until the OSD menu You will find, after upgrade, the version have already changed from The former "HUDSON 150C5 V002 20040511" to the Present "HUDSON 150C5 V200 20040705 as shown in Fig. 15 and Fig. 16

Before upgrade



Factory Mode---  
Indicator

Fig. 15

After upgrade



Factory Mode---  
Indicator

Fig. 16

3) Turn off the monitor, exit the factory mode.

◀◀ Go to cover page

### Safety Checks

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

### Fire and Shock Hazard

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.
2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.
3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.
4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.
5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.
6. Critical components having special safety characteristics are identified with ans by the Ref. No. in the parts list and enclosed within a broken line \* (where several critical components are grouped in one area) along with the safety symbols on the schematic diagrams and/or exploded views.
7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.
8. Many electronic products use a polarized ac line cord (one wide pin on the plug.) Defeating this safety feature may create a potential hazard to the service and the user. Extension cords which do not incorporate the polarizing feature should never be used.
9. After reassembly of the unit, always perform a leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc. to be sure the unit may be safely operated without danger of electrical shock.

\* Broken line

### Implosion

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.
2. Use only replacement tubes specified by the manufacturer.


### X-radiation

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.
2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.
3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.
4. When the HV circuitry is operating properly there is no possibility of an x-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.
5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.
7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.
8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

### Leakage Current Cold Check

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.
2. Turn on the power switch.
3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

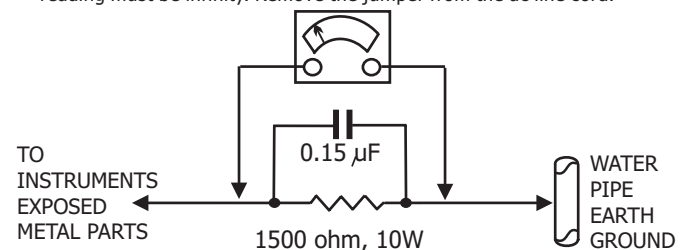

### Leakage Current Hot Check

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.
2. Connect a 1.5k, 10w resistor paralleled by a 0.15uf. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown above.
3. Use an ac voltmeter with at least 5000 ohms volt sensitivity to measure the potential across the resistor.
4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5 milliamps. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.
5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

### Picture Tube Replacement

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

### Parts Replacement

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards

**WARNING:** Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.  
**SERVICE NOTE:** The CRT DAG is not at chassis ground.