
11 Disassembly and Reassembly

This section of the service manual describes the disassembly and reassembly procedures for the LS21BRBS TFT-LCD monitors.

⚠ WARNING: This monitor contains electrostatically sensitive devices. Use caution when handling these components.

11-1 Disassembly

- ⚠ Cautions:**
1. Disassembly stand on the flat desk.
 2. Disconnect the monitor from the power source before disassembly.



1. Place monitor face down on cushioned table. Separate the screw (4 point) and lift up the stand.




2. Use the Jig and lift up the Cover Rear.

11 Disassembly and Reassembly



3. Disconnect cable Main Board and Separate screw between Shield PCB and Bracket PCB.(2 point)

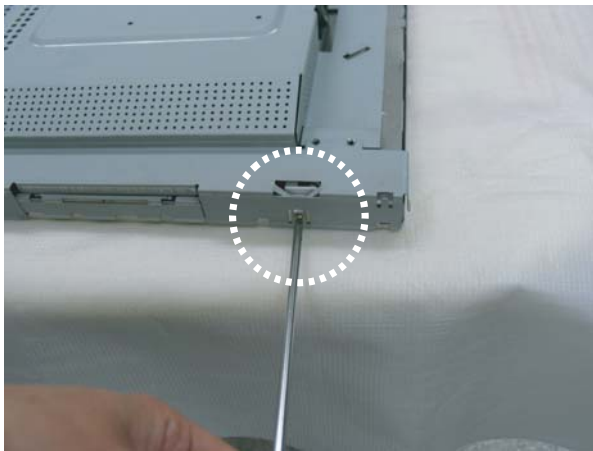

4. Separate screw Between Shield PCB and Panel. (4 point) and lift up the Shield.



5. Separate harness of the Panel with the IP Board with the Main Board.

11-2 Reassembly

Reassembly procedures are in the reverse order of disassembly procedures.